


BOARD TO WIRE CONNECTORS

POLARISED 2.0mm PITCH

- 2 - 16 ways
- Accepts wire of 28 - 22 AWG
- Housing, Wafer and Terminal Available
- Current rating 2A AC, DC
- Voltage rating 250VAC,DC

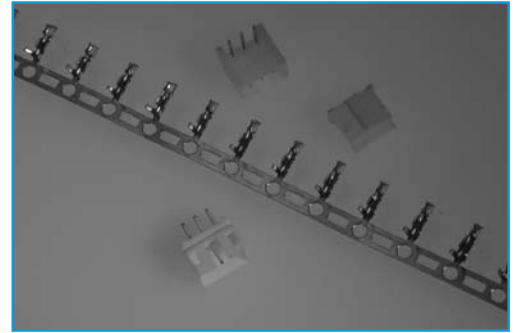

SECTION 8

SPECIFICATION

General

Withstand Voltage: 800vAC/min
Insulation resistance: 1000mΩ min
Temperature range: -25°C to +85°C

Wafer

Material:
Post: Brass, Tin/Plated
Base: Nylon 66, UL94V-0



Housing

Material: Nylon 66, UL94V-0

Terminal

Wire acceptance: 22-28 AWG
Material: Phos, Bronze
Finish: Tin/Plated 40μ" min
Thickness: 0.2mm

OUTLINE DRAWING

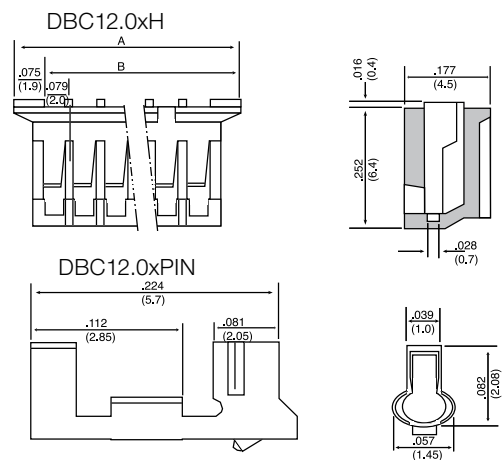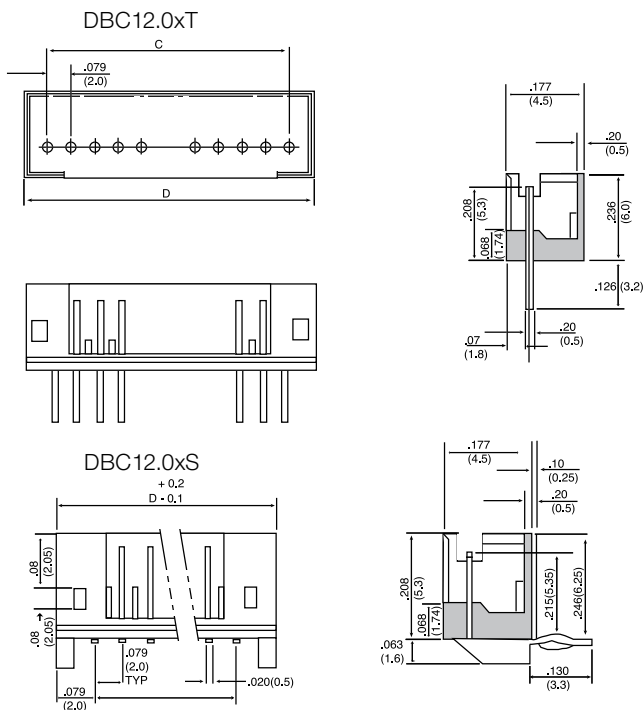

Dim	mm
A	(No Ways x2) -2
B	(No Ways x2) +1.8
C	(No Ways x2) -2
D	(No Ways x2) +2

ORDERING INFORMATION

DBC	1	2.0	2	T
Dubilier Connectors	Series	Pitch	N° of Ways	Style
		2.0 = 2mm pitch	2 = 2ways 10 = 10ways etc	T = Top Entry S = Side Entry 90° H = Housing

DBC	1	2.0	PIN
Dubilier Connectors	Series	Pitch	Pin
		2.0 = 2mm pitch	