

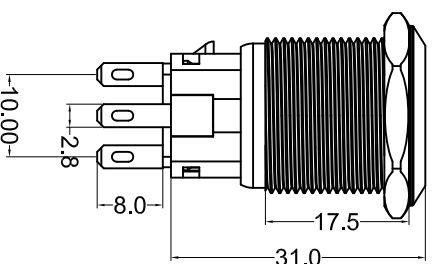


- 备注:
1. 外壳镗雕A3;
 2. 拧螺母，配垫圈。

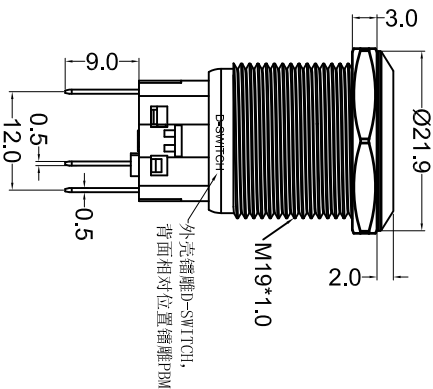

Nut Torque:5~14Nm

Operating Pressure:500gf ±200gf

Operating Stroke:3.5mm±0.5mm

Protection Grade:IP67,IK08

Function:ON-OFF

Contact:Silver Alloy

Base:PA66

Shell:SUS

Button:SUS

Lamp Type:LED

Lamp Life:50000H

Terminal:Brass,silver

Rating (Resistive load):3A 250V (AC)

Contact Resistance:50mΩ Max.

Insulation Resistance:100MΩ Min.

Dielectric Strength:1500VAC 1 minute

Electrical life:50,000 cycles



Mechanical life:100,000 cycles

Operating Temperature:-20°C~80°C

Relative Air Humidity:45%~85%

Safety Approval:   

CUT-OUT



公差 TOLERANCES .X±0.5 .XX±0.3 角度 ANGLE ±1° 单位 DIMENSION UNIT mm.

版本 VERSION A0 比例尺 SCALE 1:1 日期 DATE 2022.03.09 品名 TITLE 图号 DRAWING NO

核准 核对 绘图 审核 日期 DATE ECN NO. APPROVED BY CHECKED BY DRAWN BY 孙成 PBM-19215-FB-U1-Q12-S6S-Z1-K-A3-0004 1013277

版本 VER 变更说明 CHANGE DESCRIPTION