

SHEET 1 OF 1




CIRCUIT: DPDT
CONTACT CONFIGURATION


▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	(ON)
2-3,5-6	OPEN	2-1,5-4


(ON) = MOMENTARY

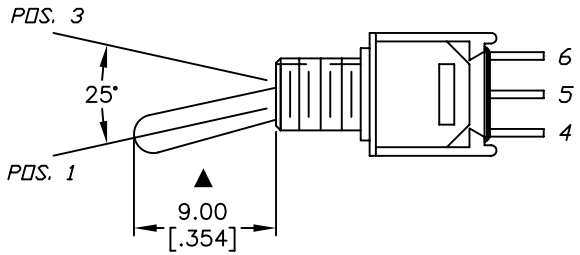


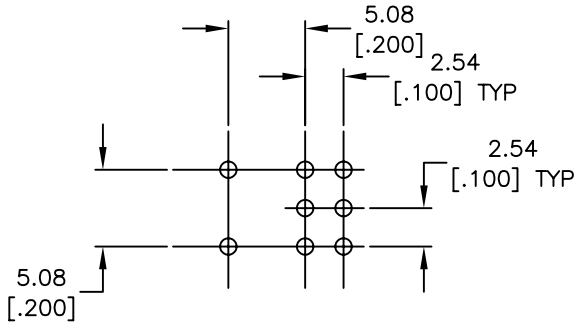

RECOMMEND P.C.B. LAYOUT

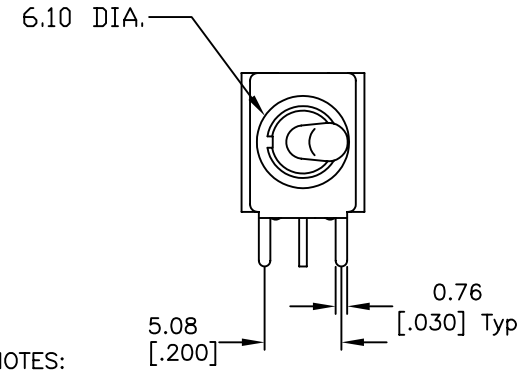

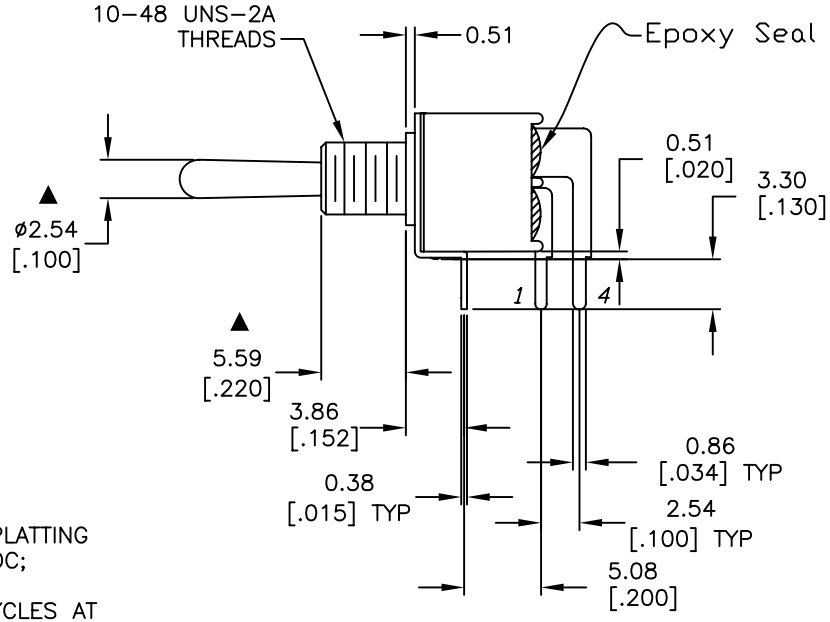

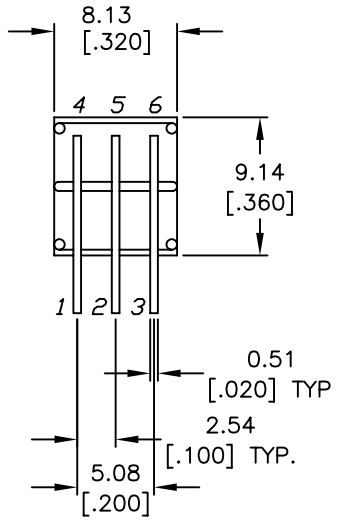

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: 0.0=±0.4
   0.00=±0.25
3. TERM. NOS. FOR REF. ONLY
4. TERM/CONTACT MATERIAL BRASS WITH SILVER PLATTING
5. ▲ CONTACT RATING: 3 Amps @120 VAC or 28 VDC;
   1 Amp @250 VAC.
6. ELECTRICAL LIFE: 30,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000M OHMS MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -40°C to 85°
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT

REV.	ECN No.	DESCRIPTION	DATE	CHKD
B	17427	9.40 ACTUATOR TO 9.00	7/2/07	TN
A	14258	RELEASED FOR PRODUCTION	8/23/04	AR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH™

TITLE: 200MDP2T1B3M6QE

SCALE	DATE	DR	DWG	REV
2:1	7/2/07	TN	T211092	B