
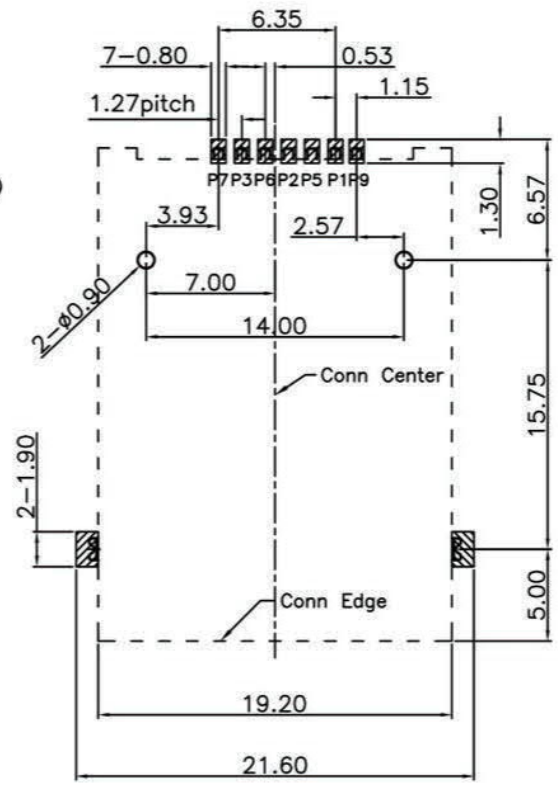
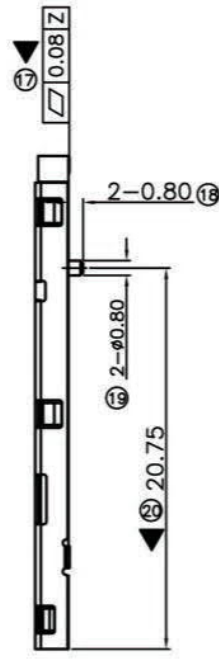


REV.	ECH.NO.	MODIFY.CONTENT	DATE
A0		NEW	2017/10/30

型号: KH-SIM1926-W

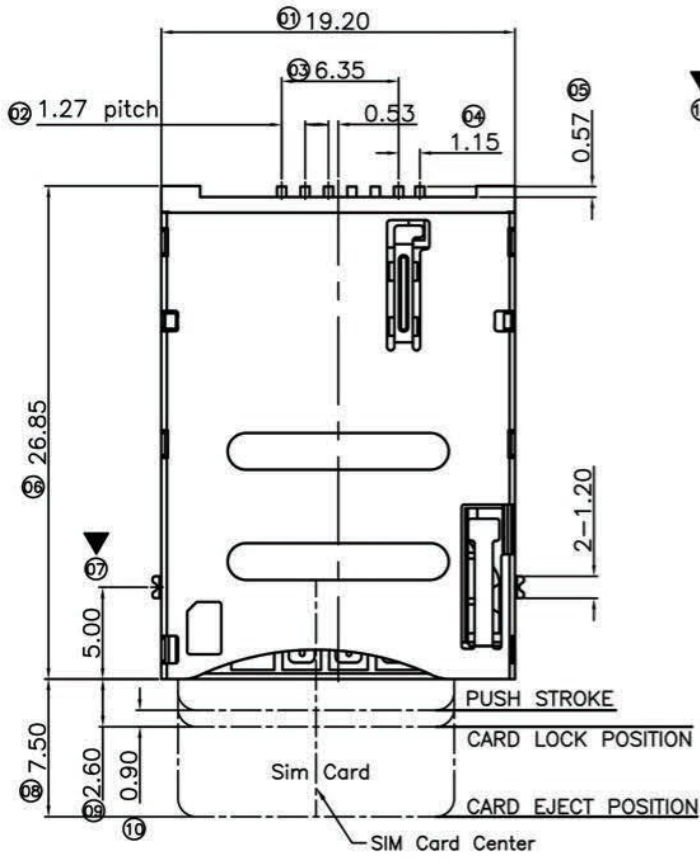


Specification:

- \*Electrical Characteristics:
  - Current Rating:0.5A.
  - Withstanding Voltage:AC500V r.m.s.
  - Insulation Resistance:1000Megohms Minimum at DC 500V
  - Contact Resistance:100Miliohms Maximum.
- \*Mechanical Characteristics:
  - Mating Cycles:5000 Insertions.
- \*Environmenttal:
  - Operating Temperture:-40°To+60°
- \*Material:
  - 1.Housing:HI-Temp plastic UL 94V-0 Rated.
  - 2.Contact:Copper Alloy.
  - 3.Shell:SUS.
- \*Finish :
  - 1u" Gold plated on conatct area,100u"Min Tin plated on solder tails, Base Nickel :50u"Min
- \*Packing:
  - Number of connectors:750Pcs/REEL
- \*Measure:
  - ▼ Marked as the key test of QC and IPQC
  - ⊙ Marked as FAI test size
  - \*PART NO.

PART NUMBER INFORMATION :



Connector terminal NO.	Pin NO.
Pin 1	VCC:PWR signal and GND
Pin 2	RST:Reset signal
Pin 3	CLK:Clocking signal
Pin 5	GND:PWR signal and GND
Pin 6	VPP:Porgramming Voltage
Pin 7	I/O:Serial date input/output

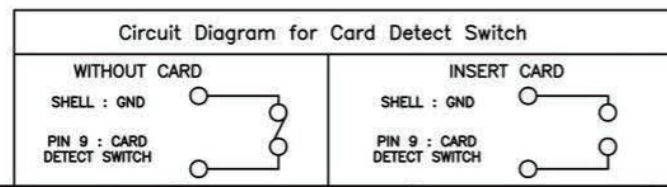

GENERAL TOLERANCE	DWG NO.	LZA0517-001	APPD:	Achilles	Scale	1:1
X.±0.20	x'.±5'	Title	CHKD:		UNIT	mm
.X±0.15	.x'±2'		DR:		Visual	
.XX±0.08	.xx'±1'	Part NO.	Date	2017/10/30	Edition	A0
.XXX±0.05	.xxx'±0.5'	深圳市金航标电子有限公司		WWW.BDS666.COM		
SHEET 1/1		0755-83044319				