Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



DIN rail housing, Lower housing part with metal foot catch, with vents, width: 18.9 mm, height: 120.6 mm, depth: 82.85 mm, color: light grey (7035), cross connection: DIN rail connector (optional), number of positions cross connector: 5 or 8

Your advantages

- Easy, tool-free mounting
- Optional DIN rail connector for easy module-to-module communication
- Lock and Release principle for automatic latching and intuitive release of the front connection plug
- Plastic in accordance with UL94 V0: for more rigorous flammability requirements
- Versatile use: deeper design for more PCB space
- Greater flexibility: combination with ICS series electronics housing using DIN rail connectors

Commercial Data

Item number	1103440
Packing unit	1 pc
Minimum order quantity	10 pc
Sales Key	A13
Product Key	ACHEBA
GTIN	4055626966601
Weight per Piece (including packing)	44.55 g
Weight per Piece (excluding packing)	33.2 g
Customs tariff number	85389099
Country of origin	DE

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Technical Data


Notes

Assembly instruction:	Refer to the data sheet for the range in the download area.
Recommendation	Material of contact pads for bus connector, galvanic gold (hard gold)

Product properties

Product type	Lower part of the housing
Max. number of positions	48 (pitch: 3.45 mm)
	32 (pitch: 5 mm)
Type	Lower housing part with metal foot catch
Housing type	DIN rail housing
Ventilation openings present	yes
Housing series	ME-IO

Dimensions

Dimensional drawing	
Width	18.9 mm
Height	120.6 mm
Depth	82.85 mm
Depth from top edge of DIN rail	76.25 mm

PCB design

PCB thickness	1.4 mm ... 1.8 mm

Material specifications

Color	light grey (7035)
Flammability rating according to UL 94	V0
Surface characteristics	untreated
Housing material	Polyamide

Environmental and real-life conditions

Power dissipation single housing for 20 °C

Ambient temperature	20 °C
Reduction factor	1
Mounting position	vertical

Power dissipation	11.8 W

Power dissipation single housing for 30 °C

Ambient temperature	30 °C
Reduction factor	0.81
Mounting position	vertical
Power dissipation	9.6 W

Power dissipation single housing for 40 °C

Ambient temperature	40 °C
Reduction factor	0.63
Mounting position	vertical
Power dissipation	7.5 W

Power dissipation single housing for 50 °C

Ambient temperature	50 °C
Reduction factor	0.46
Mounting position	vertical
Power dissipation	5.5 W

Power dissipation single housing for 60 °C

Ambient temperature	60 °C
Reduction factor	0.31
Mounting position	vertical
Power dissipation	3.7 W

Vibration test

Specification	IEC 60068-2-6:2007-12
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.15 mm (10 - 58.1 Hz)
Acceleration	2g (58.1 - 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis

Glow-wire test

Specification	IEC 60695-2-11:2014-02
Temperature	850 °C
Time of exposure	30 s

Thermal stability / ball thrust test

Specification	IEC 60695-10-2:2014-02
Temperature	125 °C
Test duration	1 h
Force	20 N

Mechanical strength / tumbling barrel

Specification	IEC 60068-2-31:2008-05

Height of fall	50 cm
Frequency	50

Shocks

Specification	IEC 60068-2-27:2008-02
Pulse shape	Semi-sinusoidal
Acceleration	15g
Shock duration	11 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)

Test for substances that would hinder coating with paint or varnish

Specification	VDMA 24364:2018-05

Degree of protection (IP code)

Specification	IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08

Ambient conditions

Max. IP code to attain	IP20
Ambient temperature (operation)	-40 °C ... 105 °C (depending on power dissipation)
Ambient temperature (storage/transport)	-40 °C ... 55 °C
Ambient temperature (assembly)	-5 °C ... 100 °C
Relative humidity (storage/transport)	80 %

PCB data

Number of PCB holders	1
Type of PCB mount	Latching
Total PCB surface	8500 mm²
Thickness of the PCB	1.4 mm ... 1.8 mm

Mounting


Mounting type	DIN rail mounting
Mounting position	Vertical (horizontal DIN rail)

Packaging specifications

Type of packaging	packed in cardboard
Outer packaging type	Carton


Drawings

Dimensional drawing

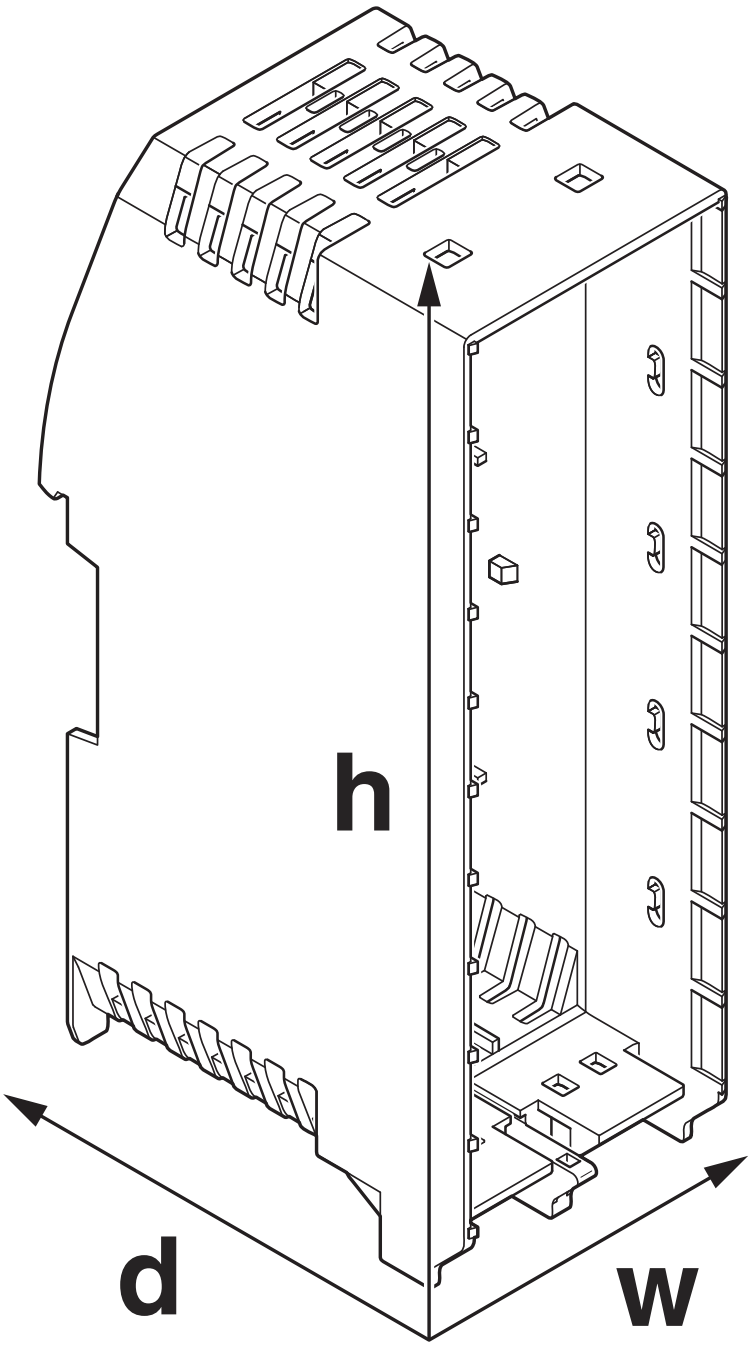


Schematic figure for illustrating the item dimensions. The figure is not of the desired product. For further details, refer to the product drawings in the “Downloads” tab.

Diagram

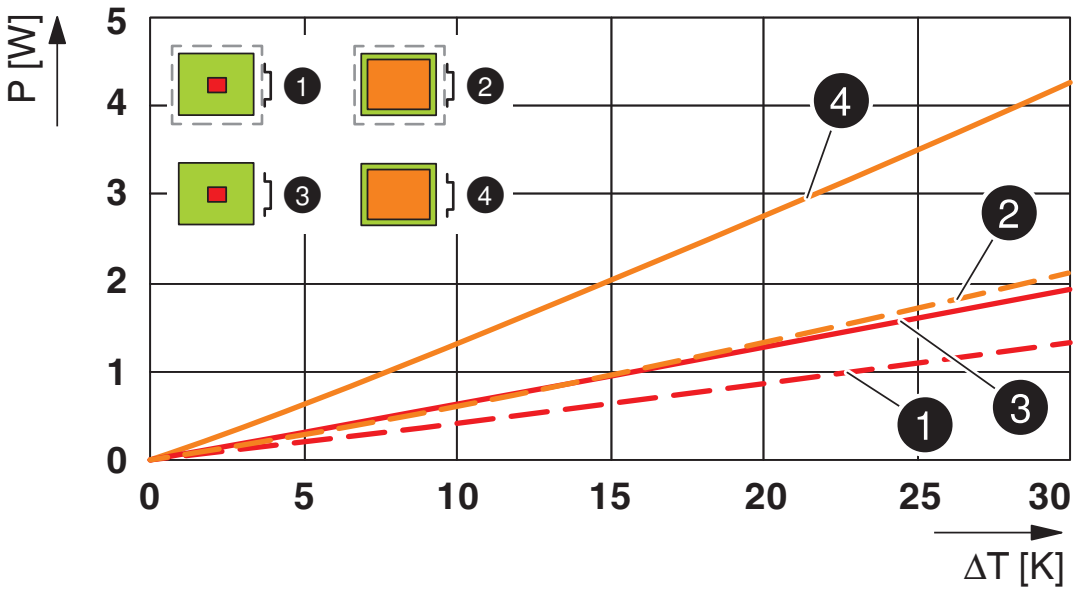

Power dissipation diagram for 0 K ... 30 K

Diagram

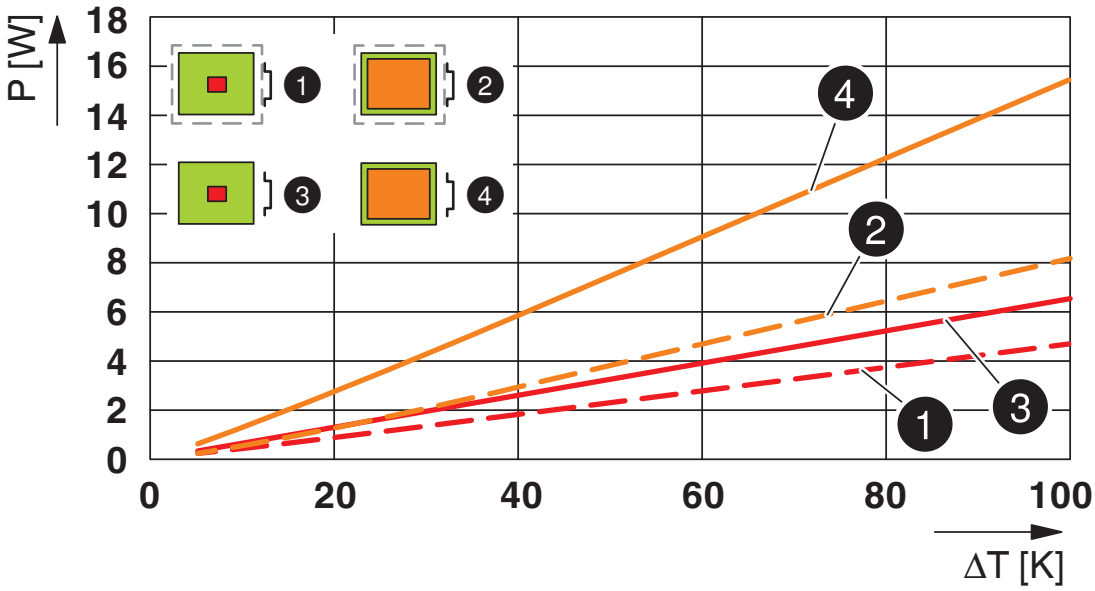

Power dissipation diagram for 0 K ... 100 K

Classifications

ECLASS

ECLASS-9.0	27182702
ECLASS-10.0.1	27182702
ECLASS-11.0	27182702

ETIM

ETIM 8.0	EC001031

UNSPSC

UNSPSC 21.0	31261500

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Mandatory Accessories

Filler plugs

Filler plugs - ME-IO 18,8 F-LR 7035 - 2202635

https://www.phoenixcontact.com/us/products/2202635




DIN rail housing, Filler plugs, for closing the Lock and Release area, width: 11.7 mm, height: 16.1 mm, depth: 10.6 mm, color: light grey (7035)

Accessories

Housing cover

Housing cover - ME-IO 18,8 C 2U 7035 - 2201799

https://www.phoenixcontact.com/us/products/2201799



DIN rail housing, 2U, Housing cover, width: 18.9 mm, height: 21.8 mm, depth: 26 mm, color: light grey (7035)

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035


1103440

https://www.phoenixcontact.com/us/products/1103440

Housing cover

Housing cover - ME-IO 18,8 C 3U 7035 - 2201800

https://www.phoenixcontact.com/us/products/2201800



DIN rail housing, 3U, Housing cover, width: 18.9 mm, height: 32.8 mm, depth: 26 mm, color: light grey (7035)

Housing cover

Housing cover - ME-IO 18,8 C 3U S1 7035 - 2201801

https://www.phoenixcontact.com/us/products/2201801




DIN rail housing, 3U, Housing cover, width: 18.9 mm, height: 32.8 mm, depth: 26 mm, color: light grey (7035)

Housing cover

Housing cover - ME-IO 18,8 C 4U 7035 - 2201802

https://www.phoenixcontact.com/us/products/2201802



DIN rail housing, 4U, Housing cover, width: 18.9 mm, height: 43.8 mm, depth: 26 mm, color: light grey (7035)

Housing cover

Housing cover - ME-IO 18,8 C 5U 7035 - 2201803

https://www.phoenixcontact.com/us/products/2201803




DIN rail housing, 5U, Housing cover, width: 18.9 mm, height: 54.8 mm, depth: 26 mm, color: light grey (7035)

Housing cover

Housing cover - ME-IO 18,8 C 6U 7035 - 2201804

https://www.phoenixcontact.com/us/products/2201804



DIN rail housing, 6U, Housing cover, width: 18.9 mm, height: 65.8 mm, depth: 26 mm, color: light grey (7035)

Housing cover

Housing cover - ME-IO 18,8 C 7U 7035 - 2201805

https://www.phoenixcontact.com/us/products/2201805




DIN rail housing, 7U, Housing cover, width: 18.9 mm, height: 76.8 mm, depth: 26 mm, color: light grey (7035)

Housing cover

Housing cover - ME-IO 18,8 C 9U 7035 - 2201806

https://www.phoenixcontact.com/us/products/2201806



DIN rail housing, 9U, Housing cover, width: 18.9 mm, height: 98.8 mm, depth: 26 mm, color: light grey (7035)

Housing cover

Housing cover - ME-IO 18,8 C 2U MC18 7035 - 2202581

https://www.phoenixcontact.com/us/products/2202581



DIN rail housing, 2U for marking lid, Housing cover, width: 18.9 mm, height: 21.9 mm, depth: 26 mm, color: light grey (7035)

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Housing cover

Housing cover - ME-IO 18,8 C 2U MC10 7035 - 2202582

https://www.phoenixcontact.com/us/products/2202582



DIN rail housing, 2U for marking lid, Housing cover, width: 18.9 mm, height: 21.9 mm, depth: 26 mm, color: light grey (7035)

Housing cover

Housing cover - ME-IO 18,8 C 2U MC 7035 - 2202616

https://www.phoenixcontact.com/us/products/2202616



DIN rail housing, 2U for marking lid, Housing cover, width: 18.9 mm, height: 21.9 mm, depth: 26 mm, color: light grey (7035)

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Marking lid

Marking lid - ME-IO 18,8 MC 8U TRANS - 2202627

https://www.phoenixcontact.com/us/products/2202627



DIN rail housing, 8U, Marking lid, width: 18.8 mm, height: 110.95 mm, color: transparent

Housing cover

Housing cover - ME-IO 18,8 C 10U 7035 - 2202630

https://www.phoenixcontact.com/us/products/2202630



DIN rail housing, 10U, Housing cover, width: 18.9 mm, height: 109.8 mm, depth: 26 mm, color: light grey (7035)

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Housing cover

Housing cover - ME-IO 18,8 C 8U 7035 - 2202634

https://www.phoenixcontact.com/us/products/2202634



DIN rail housing, 8U, Housing cover, width: 18.9 mm, height: 87.8 mm, depth: 26 mm, color: light grey (7035)

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U02-7035 - 1081099

https://www.phoenixcontact.com/us/products/1081099



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 2, number of rows: 2, number of positions: 2, number of connections: 2, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring lever: orange

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-62/62-7035 - 1081107

https://www.phoenixcontact.com/us/products/1081107




PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Spring opener color: blue, red/blue, red

PCB header

PCB header - HSCH 2,5-2U-22TT 9005 - 1087700

https://www.phoenixcontact.com/us/products/1087700



PCB headers, nominal cross section: 2.5 mm^2, color: black, nominal current: 8 A, rated voltage (III/2): 320 V, type of contact: Male connector, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCH 2,5/..-G, pitch: 5 mm, mounting: Wave soldering, pin layout: Mixed pinning, solder pin [P]: 3.8 mm, number of solder pins per potential: 1, plug-in system: HSC 2,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard, Partially assembled version

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-24/24-7035 - 1088581

https://www.phoenixcontact.com/us/products/1088581



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: red, yellow / red, yellow

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-56/56-7035 - 1088582

https://www.phoenixcontact.com/us/products/1088582



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: green, blue / green, blue

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1UTT-02/02-7035 - 1135246

https://www.phoenixcontact.com/us/products/1135246



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 2, number of rows: 2, number of positions: 2, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: black, red / black, red

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-99/99-9005 - 1211074

https://www.phoenixcontact.com/us/products/1211074



PCB connector, nominal cross section: 2.5 mm^2, color: black, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: white

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-7035 - 2201780

https://www.phoenixcontact.com/us/products/2201780



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring lever: orange

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1UTT-7035 - 2201781

https://www.phoenixcontact.com/us/products/2201781



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 2, number of rows: 2, number of positions: 2, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring lever: orange

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U20-7035 - 2201782

https://www.phoenixcontact.com/us/products/2201782




PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 2, number of rows: 2, number of positions: 2, number of connections: 2, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring lever: orange

PCB header

PCB header - HSCH 2,5-3U/12 9005 - 2201788

https://www.phoenixcontact.com/us/products/2201788



PCB headers, nominal cross section: 2.5 mm^2, color: black, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Male connector, number of potentials: 12, number of rows: 2, number of positions: 12, number of connections: 12, product range: HSCH 2,5/..-G, pitch: 5 mm, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 3.8 mm, number of solder pins per potential: 1, plug-in system: HSC 2,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035


1103440

https://www.phoenixcontact.com/us/products/1103440

PCB header

PCB header - HSCH 2,5-2U/ 8 9005 - 2201789

https://www.phoenixcontact.com/us/products/2201789




PCB headers, nominal cross section: 2.5 mm^2, color: black, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Male connector, number of potentials: 8, number of rows: 2, number of positions: 8, number of connections: 8, product range: HSCH 2,5/..-G, pitch: 5 mm, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 3.8 mm, number of solder pins per potential: 1, plug-in system: HSC 2,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard

PCB header

PCB header - HSCH 2,5-2U-TTTT 9005 - 2201790

https://www.phoenixcontact.com/us/products/2201790



PCB headers, nominal cross section: 2.5 mm^2, color: black, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Male connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCH 2,5/..-G, pitch: 5 mm, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 3.8 mm, number of solder pins per potential: 1, plug-in system: HSC 2,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard, Partially assembled version

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

PCB header

PCB header - HSCH 2,5-2U-2220 9005 - 2201792

https://www.phoenixcontact.com/us/products/2201792




PCB headers, nominal cross section: 2.5 mm^2, color: black, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Male connector, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCH 2,5/..-G, pitch: 5 mm, mounting: Wave soldering, pin layout: Mixed pinning, solder pin [P]: 3.8 mm, number of solder pins per potential: 1, plug-in system: HSC 2,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard, Partially assembled version

PCB header

PCB header - HSCH 1,5-3U/18 9005 - 2202232

https://www.phoenixcontact.com/us/products/2202232



PCB headers, nominal cross section: 1.5 mm^2, color: black, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Male connector, number of potentials: 18, number of rows: 2, number of positions: 18, number of connections: 18, product range: HSCH 1,5/..-G, pitch: 3.45 mm, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 3.8 mm, number of solder pins per potential: 1, plug-in system: HSC 1,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035


1103440

https://www.phoenixcontact.com/us/products/1103440

PCB header

PCB header - HSCH 1,5-2U/12 9005 - 2202233

https://www.phoenixcontact.com/us/products/2202233



PCB headers, nominal cross section: 1.5 mm^2, color: black, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Male connector, number of potentials: 12, number of rows: 2, number of positions: 12, number of connections: 12, product range: HSCH 1,5/..-G, pitch: 3.45 mm, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 3.8 mm, number of solder pins per potential: 1, plug-in system: HSC 1,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 1,5-1U6-7035 - 2202234

https://www.phoenixcontact.com/us/products/2202234



PCB connector, nominal cross section: 1.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Female connector, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring lever: orange

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-44/44-7035 - 2202567

https://www.phoenixcontact.com/us/products/2202567



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: yellow, yellow / yellow, yellow

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-99/99-7035 - 2202568

https://www.phoenixcontact.com/us/products/2202568



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: white, white / white, white

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-00/00-7035 - 2202569

https://www.phoenixcontact.com/us/products/2202569



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: black, black / black, black

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-66/66-7035 - 2202570

https://www.phoenixcontact.com/us/products/2202570



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: blue, blue / blue, blue

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-55/55-7035 - 2202571

https://www.phoenixcontact.com/us/products/2202571



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: green, green / green, green

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-22/22-7035 - 2202572

https://www.phoenixcontact.com/us/products/2202572



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: red, red / red, red

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-99/99-3000 - 1003852

https://www.phoenixcontact.com/us/products/1003852




PCB connector, nominal cross section: 2.5 mm^2, color: 火红色, nominal current: 8 A, rated voltage (III/2): 320 V, type of contact: Female connector, number of rows: 2, number of positions: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: white, white / white, white

PCB header

PCB header - HSCH 2,5-2U/ 8 THR 9005 - 2203405

https://www.phoenixcontact.com/us/products/2203405



PCB headers, nominal cross section: 2.5 mm^2, color: black, nominal current: 8 A, rated voltage (III/2): 250 V, contact surface: Tin, type of contact: Male connector, number of potentials: 8, number of rows: 2, number of positions: 8, number of connections: 8, product range: HSCH 2,5/..-G-THR, pitch: 5 mm, mounting: THR soldering, pin layout: Linear pinning, solder pin [P]: 2.3 mm, number of solder pins per potential: 1, plug-in system: HSC 2,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: 44 mm wide tape

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

PCB header

PCB header - HSCH 2,5-3U/12 THR 9005 - 2203406

https://www.phoenixcontact.com/us/products/2203406



PCB headers, nominal cross section: 2.5 mm^2, color: black, nominal current: 8 A, rated voltage (III/2): 250 V, contact surface: Tin, type of contact: Male connector, number of potentials: 12, number of rows: 2, number of positions: 12, number of connections: 12, product range: HSCH 2,5/..-G-THR, pitch: 5 mm, mounting: THR soldering, pin layout: Linear pinning, solder pin [P]: 2.3 mm, number of solder pins per potential: 1, plug-in system: HSC 2,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: 56 mm wide tape

PCB header

PCB header - HSCH 1,5-3U/18 THR 9005 - 2203408

https://www.phoenixcontact.com/us/products/2203408



PCB headers, nominal cross section: 1.5 mm^2, color: black, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Male connector, number of potentials: 18, number of rows: 2, number of positions: 18, number of connections: 18, product range: HSCH 1,5/..-G-THR, pitch: 3.45 mm, mounting: THR soldering, pin layout: Linear pinning, solder pin [P]: 2.3 mm, number of solder pins per potential: 1, plug-in system: HSC 1,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: 56 mm wide tape

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

PCB header

PCB header - HSCH 1,5-2U/12 THR 9005 - 2203409

https://www.phoenixcontact.com/us/products/2203409



PCB headers, nominal cross section: 1.5 mm^2, color: black, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Male connector, number of potentials: 12, number of rows: 2, number of positions: 12, number of connections: 12, product range: HSCH 1,5/..-G-THR, pitch: 3.45 mm, mounting: THR soldering, pin layout: Linear pinning, solder pin [P]: 2.3 mm, number of solder pins per potential: 1, plug-in system: HSC 1,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: 44 mm wide tape

PCB header

PCB header - HSCH 2,5-3U-22TT22 9005 - 2203559

https://www.phoenixcontact.com/us/products/2203559



PCB headers, nominal cross section: 2.5 mm^2, color: black, nominal current: 8 A, rated voltage (III/2): 320 V, type of contact: Male connector, number of potentials: 10, number of rows: 2, number of positions: 10, number of connections: 10, product range: HSCH 2,5/..-G, pitch: 5 mm, mounting: Wave soldering, pin layout: Mixed pinning, solder pin [P]: 3.8 mm, number of solder pins per potential: 1, plug-in system: HSC 2,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard, Partially assembled version

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 1,5-1U6-7035 LP1-6 - 1022660

https://www.phoenixcontact.com/us/products/1022660



PCB connector, nominal cross section: 1.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Female connector, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring lever: orange

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 1,5-1U6-7035 LP7-12 - 1022661

https://www.phoenixcontact.com/us/products/1022661



PCB connector, nominal cross section: 1.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Female connector, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring lever: orange

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 1,5-1U6-7035 LP13-18 - 1022662

https://www.phoenixcontact.com/us/products/1022662



PCB connector, nominal cross section: 1.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Female connector, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring lever: orange

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-55/55-7035 LP19-22 - 1022663

https://www.phoenixcontact.com/us/products/1022663



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, type of contact: Female connector, number of rows: 2, number of positions: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: green, green / green, green

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-66/66-7035 LP23-26 - 1022664

https://www.phoenixcontact.com/us/products/1022664



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, Color of the spring levers: blue, blue / blue, blue

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-66/66-7035 LP27-30 - 1022665

https://www.phoenixcontact.com/us/products/1022665



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: blue, blue / blue, blue

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1UTT-62/62-7035 LP31-34 - 1022666

https://www.phoenixcontact.com/us/products/1022666



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 2, number of rows: 2, number of positions: 2, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Spring opener color: blue, red/blue, red

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-33/33-7016 - 1037429

https://www.phoenixcontact.com/us/products/1037429



PCB connector, nominal cross section: 2.5 mm^2, color: anthracite gray, nominal current: 8 A, rated voltage (III/2): 320 V, type of contact: Female connector, number of rows: 2, number of positions: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring lever: orange

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-09/53-7035 - 1037438

https://www.phoenixcontact.com/us/products/1037438



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, type of contact: Female connector, number of rows: 2, number of positions: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: black, white/green, orange

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 1,5-1U6-396/396-7035 - 1064546

https://www.phoenixcontact.com/us/products/1064546



PCB connector, nominal cross section: 1.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Female connector, number of rows: 2, number of positions: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: orange, white, blue/orange, white, blue

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 1,5-1U6-545/545-7035 - 1064547

https://www.phoenixcontact.com/us/products/1064547



PCB connector, nominal cross section: 1.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Female connector, number of rows: 2, number of positions: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: green, yellow, green/green, yellow, green

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 1,5-1U6-045/045-7035 - 1064548

https://www.phoenixcontact.com/us/products/1064548



PCB connector, nominal cross section: 1.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Female connector, number of rows: 2, number of positions: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: black, yellow, green/black, yellow, green

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 1,5-1U6-000/000-7035 - 1064549

https://www.phoenixcontact.com/us/products/1064549



PCB connector, nominal cross section: 1.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Female connector, number of rows: 2, number of positions: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: black

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 1,5-1U6-336/336-7035 - 1100022

https://www.phoenixcontact.com/us/products/1100022



PCB connector, nominal cross section: 1.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Female connector, number of rows: 2, number of positions: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: orange, orange, blue/orange, orange, blue

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 1,5-1U6-555/555-7035 - 1106783

https://www.phoenixcontact.com/us/products/1106783



PCB connector, nominal cross section: 1.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Female connector, number of rows: 2, number of positions: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: green

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U20-5B/5B-7035 - 1106784

https://www.phoenixcontact.com/us/products/1106784



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, type of contact: Female connector, number of potentials: 2, number of rows: 2, number of positions: 2, number of connections: 2, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, Color of the spring levers: green

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-55/66-7035 - 1111838

https://www.phoenixcontact.com/us/products/1111838



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, type of contact: Female connector, number of rows: 2, number of positions: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, Color of the spring levers: green, green/blue, blue

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-22/44-7035 - 1111839

https://www.phoenixcontact.com/us/products/1111839



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, type of contact: Female connector, number of rows: 2, number of positions: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, Color of the spring levers: red, red/yellow, yellow

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035


1103440

https://www.phoenixcontact.com/us/products/1103440

PCB header

PCB header - HSCH 2,5-3U-TTTTTT 9005 - 1126768

https://www.phoenixcontact.com/us/products/1126768



PCB headers, nominal cross section: 2.5 mm^2, color: black, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Male connector, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCH 2,5/..-G, pitch: 5 mm, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 3.8 mm, number of solder pins per potential: 1, plug-in system: HSC 2,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard, Partially assembled version

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-09/06-7035 - 1194411

https://www.phoenixcontact.com/us/products/1194411



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: black, white / black, blue

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 1,5-1U6-7016 - 1205101

https://www.phoenixcontact.com/us/products/1205101



PCB connector, nominal cross section: 1.5 mm^2, color: anthracite gray, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Female connector, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring lever: orange

Filler plugs

Filler plugs - HSCP-SP 2,5-1U00-7016 - 1205130

https://www.phoenixcontact.com/us/products/1205130



PCB connector, nominal cross section: 2.5 mm^2, color: anthracite gray, nominal current: 8 A, rated voltage (III/2): 300 V, number of potentials: 0, number of rows: 2, number of positions: 0, number of connections: 0, product range: HSCP-SP 2,5-.., pitch: 5 mm, number of solder pins per potential: 0, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, Filler plugs

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1UTT-7016 - 1209685

https://www.phoenixcontact.com/us/products/1209685



PCB connector, nominal cross section: 2.5 mm^2, color: anthracite gray, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 2, number of rows: 2, number of positions: 2, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring lever: orange

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 1,5-1U6-629/629-7016 - 1209687

https://www.phoenixcontact.com/us/products/1209687



PCB connector, nominal cross section: 1.5 mm^2, color: anthracite gray, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Female connector, number of rows: 2, number of positions: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Spring opener color: blue, red, white/blue, red, white

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1UTT-62/62-7035 LPM-L+ - 1294375

https://www.phoenixcontact.com/us/products/1294375



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, type of contact: Female connector, number of potentials: 2, number of rows: 2, number of positions: 2, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Spring opener color: blue, red/blue, red

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-00/00-7035 LP1-10 - 1294384

https://www.phoenixcontact.com/us/products/1294384



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: black, black / black, black

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-00/00-7035 LP3-12 - 1294390

https://www.phoenixcontact.com/us/products/1294390



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: black, black / black, black

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-00/00-7035 LP5-14 - 1294391

https://www.phoenixcontact.com/us/products/1294391



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: black, black / black, black

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-00/00-7035 LP7-16 - 1294392

https://www.phoenixcontact.com/us/products/1294392



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: black, black / black, black

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 1,5-1U6-260/260-7035 - 1326553

https://www.phoenixcontact.com/us/products/1326553



PCB connector, nominal cross section: 1.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Female connector, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3. 45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: red, blue, black / red, blue, black

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 1,5-1U6-222/222-7035 - 1344448

https://www.phoenixcontact.com/us/products/1344448



PCB connector, nominal cross section: 1.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Female connector, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring lever: red

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 1,5-1U6-444/444-7035 - 1344449

https://www.phoenixcontact.com/us/products/1344449



PCB connector, nominal cross section: 1.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Female connector, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring lever: yellow

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 1,5-1U6-062/062-7035 - 1344923

https://www.phoenixcontact.com/us/products/1344923



PCB connector, nominal cross section: 1.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Female connector, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: black, blue, red / black, blue, red

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-55/55-7035 TPDC-1 - 1361702

https://www.phoenixcontact.com/us/products/1361702



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-55/55-7035 TPDC-2 - 1361704

https://www.phoenixcontact.com/us/products/1361704



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-55/55-7035 TPDC-3 - 1361705

https://www.phoenixcontact.com/us/products/1361705



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-55/55-7035 TPDC-4 - 1361706

https://www.phoenixcontact.com/us/products/1361706



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-55/55-7035 TPDC-5 - 1361708

https://www.phoenixcontact.com/us/products/1361708



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-55/55-7035 TPDC-6 - 1361709

https://www.phoenixcontact.com/us/products/1361709



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-55/55-7035 TPDC-7 - 1361711

https://www.phoenixcontact.com/us/products/1361711



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-55/55-7035 TPDC-8 - 1361714

https://www.phoenixcontact.com/us/products/1361714



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 1,5-1U6-696/696-7035 - 1376979

https://www.phoenixcontact.com/us/products/1376979



PCB connector, nominal cross section: 1.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Female connector, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: white, blue / blue, white, blue

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035


1103440

https://www.phoenixcontact.com/us/products/1103440

PCB header

PCB header - HSCH 2,5-2U-TT02 9005 - 2201793

https://www.phoenixcontact.com/us/products/2201793



PCB headers, nominal cross section: 2.5 mm^2, color: black, nominal current: 8 A, rated voltage (III/2): 320 V, type of contact: Male connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCH 2,5/..-G, pitch: 5 mm, mounting: Wave soldering, pin layout: Mixed pinning, solder pin [P]: 3.8 mm, number of solder pins per potential: 1, plug-in system: HSC 2,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard, Partially assembled version

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-69/69-7035 - 2202605

https://www.phoenixcontact.com/us/products/2202605



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Spring opener color: blue, white/blue, white

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1UTT-62/62-7035 - 2202606

https://www.phoenixcontact.com/us/products/2202606



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 2, number of rows: 2, number of positions: 2, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Spring opener color: blue, red/blue, red

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1UTT-55/55-7035 - 2202607

https://www.phoenixcontact.com/us/products/2202607



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 2, number of connections: 2, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: green, green / green, green

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-99/62-7035 - 2202608

https://www.phoenixcontact.com/us/products/2202608



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, pin layout: Linear pinning, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Spring opener color: white, white/blue, red

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 1,5-1U6-629/629-7035 - 2202609

https://www.phoenixcontact.com/us/products/2202609



PCB connector, nominal cross section: 1.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Female connector, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Spring opener color: blue, red, white/blue, red, white

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Filler plugs

Filler plugs - HSCP-SP 2,5-1U00-7035 - 2202610

https://www.phoenixcontact.com/us/products/2202610



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 300 V, contact surface: Tin, number of potentials: 0, number of rows: 2, number of positions: 0, number of connections: 0, product range: HSCP-SP 2,5-.., pitch: 5 mm, number of solder pins per potential: 0, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Filler plugs

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-29/29-7035 - 2203192

https://www.phoenixcontact.com/us/products/2203192



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Spring opener color: red, white/red, white

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-62/59-7035 - 2203194

https://www.phoenixcontact.com/us/products/2203194



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Spring opener color: blue, red/green, white

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-65/65-7035 - 2203195

https://www.phoenixcontact.com/us/products/2203195



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of potentials: 4, number of rows: 2, number of positions: 4, number of connections: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, type of packaging: packed in cardboard, Spring opener color: blue, green/blue, green

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-66/22-7035 - 2203473

https://www.phoenixcontact.com/us/products/2203473



PCB connector, nominal cross section: 2.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 320 V, type of contact: Female connector, number of rows: 2, number of positions: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, Color of the spring levers: blue, blue/red, red

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 1,5-1U6-999/999-7035 - 2203603

https://www.phoenixcontact.com/us/products/2203603



PCB connector, nominal cross section: 1.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Female connector, number of rows: 2, number of positions: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: white

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 1,5-1U6-562/562-7035 - 2203604

https://www.phoenixcontact.com/us/products/2203604




PCB connector, nominal cross section: 1.5 mm^2, color: light grey, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Female connector, number of rows: 2, number of positions: 6, product range: HSCP-SP 1,5-.., pitch: 3.45 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard, Color of the spring levers: green, blue, red/green, blue, red

PCB header

PCB header - HSCH 2,5-2U-TT22 9005 - 2203783

https://www.phoenixcontact.com/us/products/2203783



PCB headers, nominal cross section: 2.5 mm^2, color: black, nominal current: 8 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Male connector, number of potentials: 6, number of rows: 2, number of positions: 6, number of connections: 6, product range: HSCH 2,5/..-G, pitch: 5 mm, mounting: Wave soldering, pin layout: Mixed pinning, solder pin [P]: 3.8 mm, number of solder pins per potential: 1, plug-in system: HSC 2,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard, Partially assembled version

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Printed-circuit board connector

Printed-circuit board connector - HSCP-SP 2,5-1U4-44/44-7016 - 2203818

https://www.phoenixcontact.com/us/products/2203818



PCB connector, nominal cross section: 2.5 mm^2, color: anthracite gray, nominal current: 8 A, rated voltage (III/2): 320 V, type of contact: Female connector, number of rows: 2, number of positions: 4, product range: HSCP-SP 2,5-.., pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, locking clip: - Locking clip, plug-in system: HSC 2,5, locking: without, mounting: without, Color of the spring levers: yellow, yellow / yellow, yellow

Fastening clip

Fastening clip - HSCP-CB 4U-7035 - 1056722

https://www.phoenixcontact.com/us/products/1056722



ME-IO Blockbelt, for 4 PCB connectors, color: light grey (7035)

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Fastening clip

Fastening clip - HSCP-CB 3U-7035 - 1056723

https://www.phoenixcontact.com/us/products/1056723



ME-IO Blockbelt, for 3 PCB connectors, color: light grey (7035)

Fastening clip

Fastening clip - HSCP-CB 2U-7035 - 1056724

https://www.phoenixcontact.com/us/products/1056724



ME-IO Blockbelt, for 2 PCB connectors, color: light grey (7035)

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Fastening clip

Fastening clip - HSCP-CB 5U-7035 - 1056892

https://www.phoenixcontact.com/us/products/1056892



ME-IO Blockbelt, for 5 PCB connectors, color: light grey (7035)

Locking

Locking - HSC-LR 9U KIT 2003 - 2201794

https://www.phoenixcontact.com/us/products/2201794



DIN rail housing, 9U, Lock and Release system, width: 16.1 mm, height: 111.8 mm, depth: 8.8 mm, color: orange (2003)

Locking

Locking - HSC-LR 7U KIT 2003 - 2201795

https://www.phoenixcontact.com/us/products/2201795



DIN rail housing, 7U, Lock and Release system, width: 16.1 mm, height: 89.95 mm, depth: 8.8 mm, color: orange (2003)

Locking

Locking - HSC-LR 5U KIT 2003 - 2201796

https://www.phoenixcontact.com/us/products/2201796



DIN rail housing, 5U, Lock and Release system, width: 16.1 mm, height: 67.95 mm, depth: 8.8 mm, color: orange (2003)

Locking

Locking - HSC-LR 3U KIT 2003 - 2201797

https://www.phoenixcontact.com/us/products/2201797



DIN rail housing, 3U, Lock and Release system, width: 16.1 mm, height: 45.95 mm, depth: 8.8 mm, color: orange (2003)

Locking

Locking - HSC-LR 7U KIT 5015 - 2203850

https://www.phoenixcontact.com/us/products/2203850



DIN rail housing, 7U, Lock and Release system, width: 16.1 mm, height: 89.95 mm, depth: 8.8 mm, color: blue (5015)

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035


1103440

https://www.phoenixcontact.com/us/products/1103440

DIN rail bus connectors

DIN rail bus connectors - TBUS8-18,8-PPPPSSSS-7035 - 1140958

https://www.phoenixcontact.com/us/products/1140958




DIN rail connector, color: light grey, nominal current: 6 A, 4 A (parallel contacts) (Serial contacts), rated voltage (III/2): 32 V, number of positions: 8, pitch: 2.54 mm, mounting: DIN rail mounting, locking: without, mounting: without, type of packaging: packed in cardboard, Item with gold-plated contacts, bus connectors for connecting with electronics housings, 4 parallel contacts/4 serial contacts

DIN rail bus connectors

DIN rail bus connectors - TBUS8-18,8-PPPPPPPP-7035 - 2202396

https://www.phoenixcontact.com/us/products/2202396



DIN rail connector, color: light grey, nominal current: 6 A (parallel contacts), rated voltage (III/2): 32 V, number of positions: 8, pitch: 2.54 mm, mounting: DIN rail mounting, locking: without, mounting: without, type of packaging: packed in cardboard, Item with gold-plated contacts, bus connectors for connecting with electronics housings, 8 parallel contacts

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035


1103440

https://www.phoenixcontact.com/us/products/1103440

DIN rail bus connectors

DIN rail bus connectors - TBUS8-18,8-PPPPPPPS-7035 - 2202399

https://www.phoenixcontact.com/us/products/2202399




DIN rail connector, color: light grey, nominal current: 6 A, 4 A (parallel contacts) (Serial contacts), rated voltage (III/2): 32 V, number of positions: 8, pitch: 2.54 mm, mounting: DIN rail mounting, locking: without, mounting: without, type of packaging: packed in cardboard, Item with gold-plated contacts, bus connectors for connecting with electronics housings, 7 parallel contacts/1 serial contact

DIN rail bus connectors

DIN rail bus connectors - TBUS8-18,8-PPPPPPSS-7035 - 2202403

https://www.phoenixcontact.com/us/products/2202403



DIN rail connector, color: light grey, nominal current: 6 A, 4 A (parallel contacts) (Serial contacts), rated voltage (III/2): 32 V, number of positions: 8, pitch: 2.54 mm, mounting: DIN rail mounting, locking: without, mounting: without, type of packaging: packed in cardboard, Item with gold-plated contacts, bus connectors for connecting with electronics housings, 6 parallel contacts/2 serial contacts

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

DIN rail bus connectors

DIN rail bus connectors - ME 18,8 TBUS 1,5/5-ST-3,81KMGY - 2201813

https://www.phoenixcontact.com/us/products/2201813



DIN rail connector, color: light grey, nominal current: 8 A (parallel contacts), rated voltage (III/2): 125 V, contact surface: Gold, number of positions: 5, pitch: 3.81 mm, mounting: DIN rail mounting, locking: without, mounting: without, type of packaging: packed in cardboard, Item with gold-plated contacts, bus connectors for connecting with electronics housings, 5 parallel contacts

DIN rail bus connectors

DIN rail bus connectors - ME 18,8 TBUS 1,5/5 VPE1 KMGY - 2202549

https://www.phoenixcontact.com/us/products/2202549



DIN rail connector, color: light grey, nominal current: 8 A (parallel contacts), rated voltage (III/2): 125 V, number of positions: 5, pitch: 3.81 mm, mounting: DIN rail mounting, locking: without, mounting: without, type of packaging: packed in cardboard, Item with gold-plated contacts, bus connectors for connecting with electronics housings, 5 parallel contacts

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Fiber optic

Fiber optic - HS LC-H-D2C/ R2XC1-2,54 - 1036658

https://www.phoenixcontact.com/us/products/1036658



Multiple light guides with glare protection, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

Fiber optic

Fiber optic - HS LC-H-D2C/ R2XC4-2,54 - 1036724

https://www.phoenixcontact.com/us/products/1036724



Multiple light guides with glare protection, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Fiber optic

Fiber optic - HS LC-H-D2C/ R4XC4-2,54 - 1036727

https://www.phoenixcontact.com/us/products/1036727



Multiple light guides with glare protection, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

Fiber optic

Fiber optic - HS LC-H-D2C/ R2XC2-2,54 - 1043044

https://www.phoenixcontact.com/us/products/1043044



Multiple light guides with glare protection, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Fiber optic

Fiber optic - HS LC-H-D2C/ R4XC2-2,54 - 1071316

https://www.phoenixcontact.com/us/products/1071316



Multiple light guides with glare protection, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

Fiber optic

Fiber optic - HS LC-H-D2/ R3XC10-2,54 - 1104374

https://www.phoenixcontact.com/us/products/1104374

Multiple light guides with glare protection, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)



Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Fiber optic

Fiber optic - HS LC-H-D3/ R1XC1 - 2202313

https://www.phoenixcontact.com/us/products/2202313



Multiple light guides, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

Fiber optic

Fiber optic - HS LC-H-5X2/ R1XC1 - 2202314

https://www.phoenixcontact.com/us/products/2202314



Single light guide, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

Fiber optic

Fiber optic - HS LC-H-D3/ R2XC1-5,08 - 2202315

https://www.phoenixcontact.com/us/products/2202315



Multiple light guides, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

Fiber optic

Fiber optic - HS LC-H-D2/ R2XC1-2,54 - 2202316

https://www.phoenixcontact.com/us/products/2202316



Multiple light guides with glare protection, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

Fiber optic

Fiber optic - HS LC-H-D2/ R2XC2-2,54 - 2202317

https://www.phoenixcontact.com/us/products/2202317



Multiple light guides with glare protection, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

Fiber optic

Fiber optic - HS LC-H-D2/ R2XC5-2,54 - 2202318

https://www.phoenixcontact.com/us/products/2202318



Multiple light guides with glare protection, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Fiber optic

Fiber optic - HS LC-H-D2/ R2XC10-2,54 - 2202319

https://www.phoenixcontact.com/us/products/2202319



Multiple light guides with glare protection, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

Fiber optic

Fiber optic - HS LC-H-D2/ R4XC2-2,54 - 2202320

https://www.phoenixcontact.com/us/products/2202320



Multiple light guides with glare protection, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Fiber optic

Fiber optic - HS LC-H-D2/ R4XC5-2,54 - 2202321

https://www.phoenixcontact.com/us/products/2202321



Multiple light guides with glare protection, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

Fiber optic

Fiber optic - HS LC-H-D2/ R4XC9-2,54 - 2202322

https://www.phoenixcontact.com/us/products/2202322



Multiple light guides with glare protection, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

Mounting base housing - ME-IO 18,8 EB 10U TBUS 7035

1103440

https://www.phoenixcontact.com/us/products/1103440

Fiber optic

Fiber optic - HS LC-H-D2/ R2XC4-2,54 - 2202531

https://www.phoenixcontact.com/us/products/2202531



Multiple light guides with glare protection, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

Fiber optic

Fiber optic - HS LC-H-D2/ R4XC4-2,54 - 2202532

https://www.phoenixcontact.com/us/products/2202532



Multiple light guides with glare protection, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

Phoenix Contact 2022 © - all rights reserved
https://www.phoenixcontact.com

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com