
# **PRODUCT DATA DRAWING**

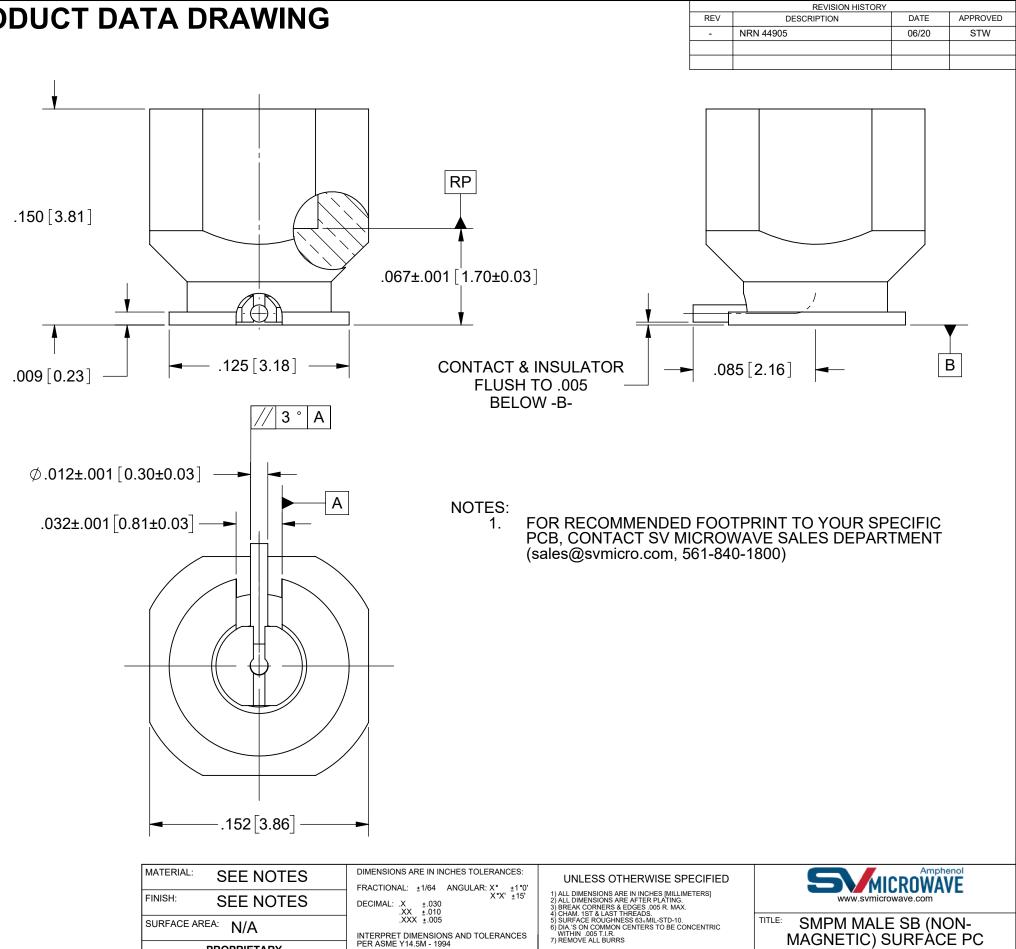

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

THIRD ANGLE PROJECTION

 $\bigoplus$ 

PROPRIETARY

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.

## MATERIAL:

BODY & CONTACT:	BERYLLIUM COPPER
INSULATOR:	POLYAMIDE-IMIDE(PAI)

#### FINISH:

BODY & CONTACT: GOLD OVER COPPER

### **PERFORMANCE:**

IMPEDANCE: FREQ. RANGE:

50 OHMS DC TO 20.0 GHz.

UNLESS OTHERWISE SPECIFIED ) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] ) ALL DIMENSIONS ARE AFTER PLATING. ) BREAK CORNERS & EDGES. 005 R. MAX. ) CHAM. 15T & LAST THREADS. ) SURFACE ROUGHNESS 63.MIL.STD-10. ) DIA'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. ) REMOVE ALL BURRS		Amphenol WWW.svmicrowave.com			
		TITLE: SMPM MALE SB (NON- MAGNETIC) SURFACE PC MOUNT W/ R/A CONTACT			
DRAWN:	KRR 06/11/20			IT W/ R/A CONT	ACT
CHECKED:	STW 06/11/20	SIZE B	DWG. NO.	3211-4	0118
APPROVED:	STW 06/11/20	S	CALE: 4:1		SHEET 1 OF 1