



### Features

- ◆ Repetitive Peak Off-State Voltage : 600V
- ◆ R.M.S On-State Current (  $I_{T(RMS)} = 25 \text{ A}$  )
- ◆ High Commutation  $dv/dt$
- ◆ Isolation Voltage (  $V_{ISO} = 1500\text{V AC}$  )

### General Description

This device is fully isolated package suitable for AC switching application, phase control application such as fan speed and temperature modulation control, lighting control and static switching relay.

This device may substitute for BTA24-600, BTB24-600 series.

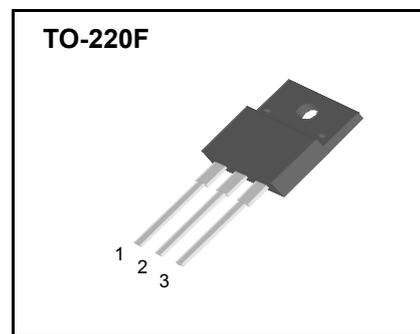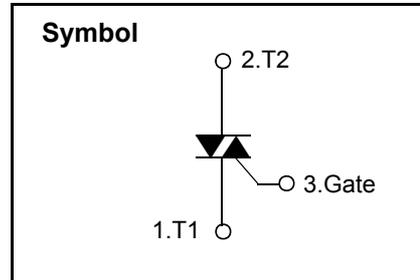

### Absolute Maximum Ratings ( $T_J = 25^\circ\text{C}$ unless otherwise specified )

Symbol	Parameter	Condition	Ratings	Units
$V_{DRM}$	Repetitive Peak Off-State Voltage	Sine wave, 50 to 60Hz	600	V
$I_{T(RMS)}$	R.M.S On-State Current	$T_j = 125^\circ\text{C}$	25	A
$I_{TSM}$	Surge On-State Current	One Cycle, 50Hz/60Hz, Peak, Non-Repetitive	250/260	A
$I^2t$	$I^2t$	$t=10\text{ms}$	312	$\text{A}^2\text{s}$
$P_{GM}$	Peak Gate Power Dissipation	$T_j = 125^\circ\text{C}$	5.0	W
$P_{G(AV)}$	Average Gate Power Dissipation	$T_j = 125^\circ\text{C}$	1.0	W
$I_{GM}$	Peak Gate Current	$T_j = 125^\circ\text{C}$	2.0	A
$V_{GM}$	Peak Gate Voltage	$T_j = 125^\circ\text{C}$	10	V
$T_J$	Operating Junction Temperature	A.C. 1 minute	- 40 ~ 125	$^\circ\text{C}$
$T_{STG}$	Storage Temperature		- 40 ~ 150	$^\circ\text{C}$



## Electrical Characteristics

Symbol	Items		Conditions	Ratings			Unit
				Min.	Typ.	Max.	
$I_{DRM}$	Repetitive Peak Off-State Current		$V_D = V_{DRM}$ , Single Phase, Half Wave $T_J = 125\text{ }^\circ\text{C}$	----	----	3.0	mA
$V_{TM}$	Peak On-State Voltage		$I_{TM} = 35\text{A}$ , Inst. $t_p=380\mu\text{s}$	—	—	1.55	V
$I_{GT1}^+$	I	Gate Trigger Current	$V_D = 12\text{ V}$ , $R_L=33\ \Omega$	—	—	50	mA
$I_{GT1}^-$	II			—	—	50	
$I_{GT3}^-$	III			—	—	50	
$V_{GT1}^+$	I	Gate Trigger Voltage	$V_D = 12\text{ V}$ , $R_L=33\ \Omega$	—	—	1.5	V
$V_{GT1}^-$	II			—	—	1.5	
$V_{GT3}^-$	III			—	—	1.5	
$V_{GD}$	Non-Trigger Gate Voltage		$T_J = 125\text{ }^\circ\text{C}$ , $V_D=V_{DRM}$ , $R_L=3.3\text{k}\Omega$	0.2	----	----	V
dv/dt	Critical Rate of Rise Off-State Voltage		$T_J = 125\text{ }^\circ\text{C}$ , $V_D=2/3\ V_{DRM}$	40	----	----	V/ $\mu\text{s}$
$I_H$	Holding Current		$I_T=0.5\text{A}$	---	--	80	mA

# TF25A60

Fig 1. Gate Characteristics

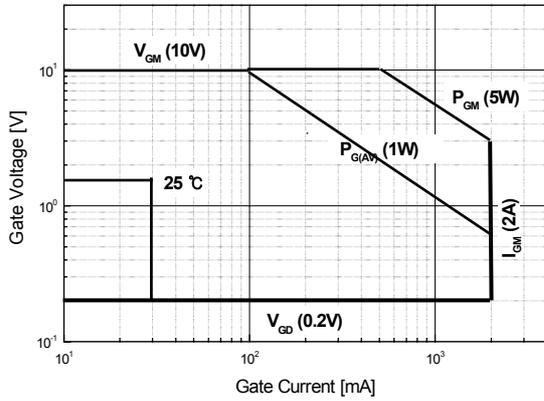


Fig 2. On-State Voltage

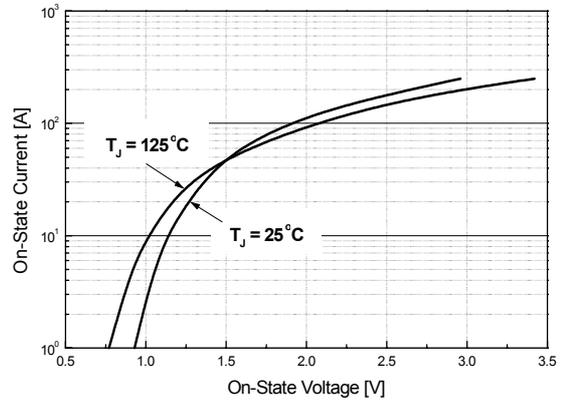


Fig 3. On State Current vs. Maximum Power Dissipation

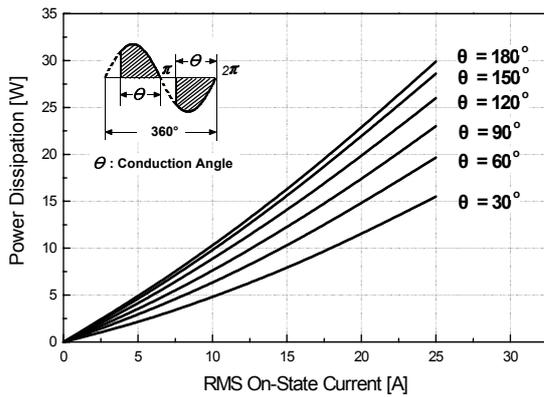


Fig 4. On State Current vs. Allowable Case Temperature

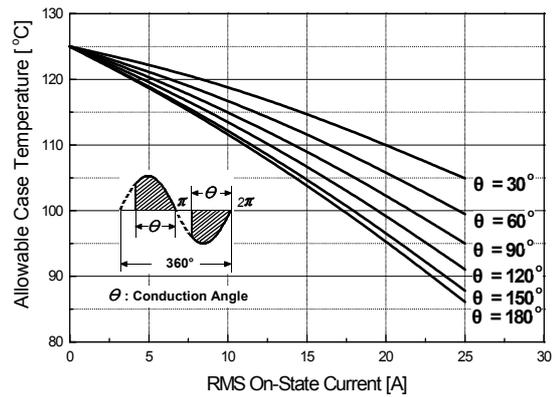


Fig 5. Surge On-State Current Rating ( Non-Repetitive )



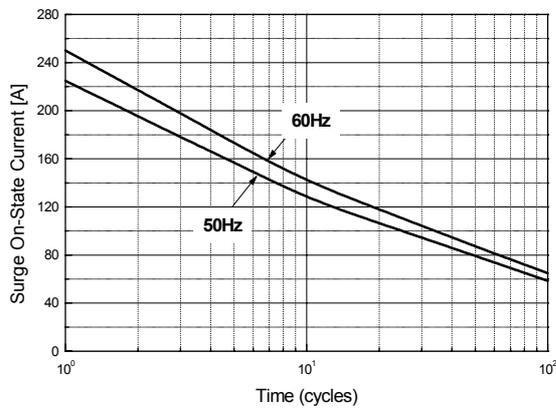


Fig 6. Gate Trigger Voltage vs. Junction Temperature

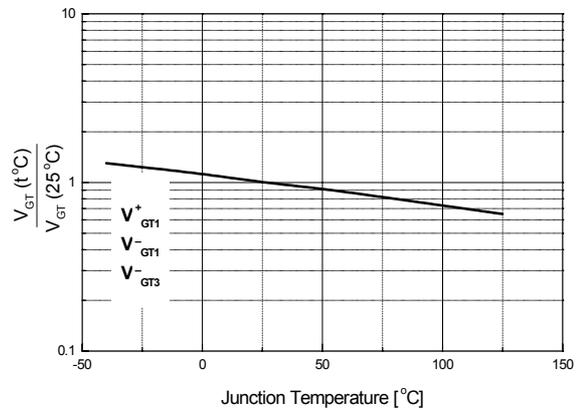


# TF25A60


**Fig 7. Gate Trigger Current vs. Junction Temperature**

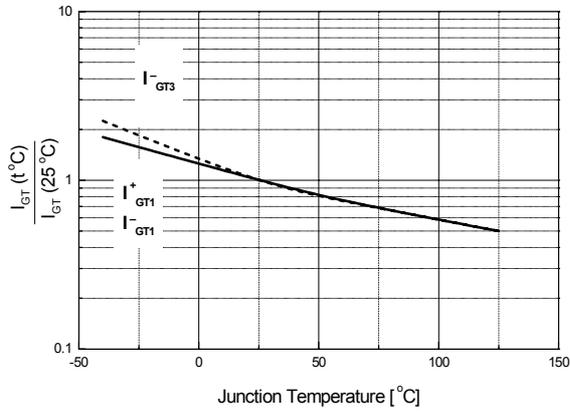


**Fig 8. Transient Thermal Impedance**

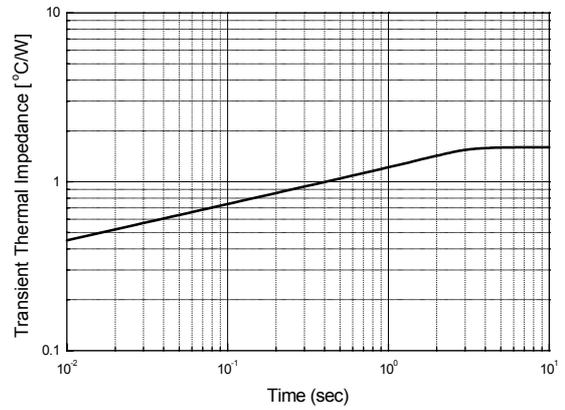


**Fig 9. Gate Trigger Characteristics Test Circuit**



Test Procedure I



Test Procedure II




Test Procedure III

# TF25A60

## TO-220F Package Dimension

Dim.	mm			Inch		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	10.4		10.6	0.409		0.417
B	6.18		6.44	0.243		0.254
C	9.55		9.81	0.376		0.386
D	13.47		13.73	0.530		0.540
E	6.05		6.15	0.238		0.242
F	1.26		1.36	0.050		0.054
G	3.17		3.43	0.125		0.135
H	1.87		2.13	0.074		0.084
I	2.57		2.83	0.101		0.111
J		2.54			0.100	
K		5.08			0.200	
L	2.51		2.62	0.099		0.103
M	1.23		1.36	0.048		0.054
N	0.45		0.63	0.018		0.025
O	0.6		1.0	0.023		0.039
$\phi$		3.7			0.146	
$\phi 1$		3.2			0.126	
$\phi 2$		1.5			0.059	

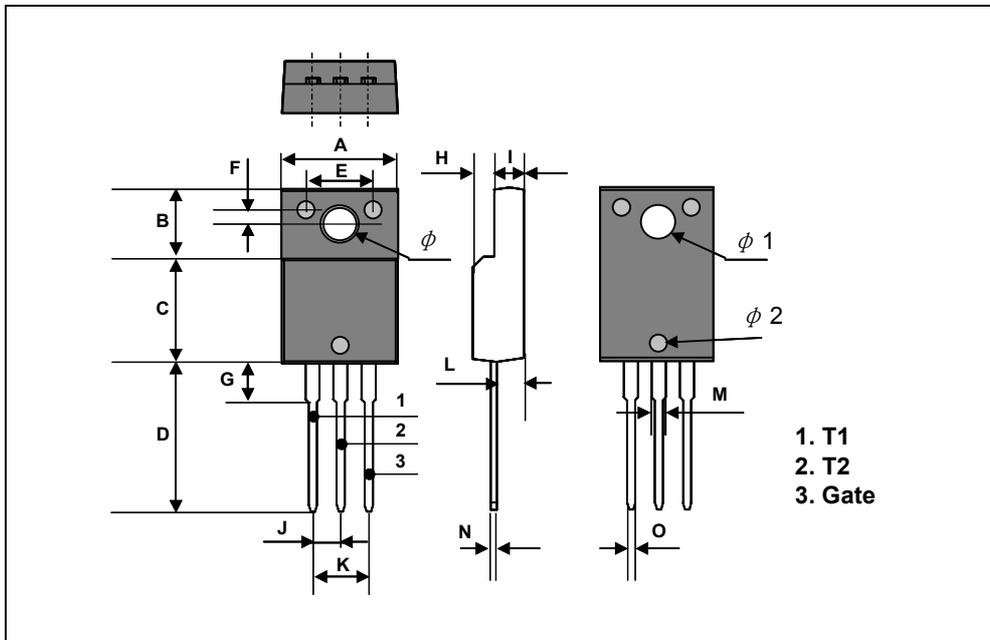

# TF25A60

## TO-220F Package Dimension, Forming

Dim.	mm			Inch		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	10.4		10.6	0.409		0.417
B	6.18		6.44	0.243		0.254
C	9.55		9.81	0.376		0.386
D	8.4		8.66	0.331		0.341
E	6.05		6.15	0.238		0.242
F	1.26		1.36	0.050		0.054
G	3.17		3.43	0.125		0.135
H	1.87		2.13	0.074		0.084
I	2.57		2.83	0.101		0.111
J		2.54			0.100	
K		5.08			0.200	
L	2.51		2.62	0.099		0.103
M	1.23		1.36	0.048		0.054
N	0.45		0.63	0.018		0.025
O	0.65		0.78	0.0025		0.031
P		5.0			0.197	
$\phi$		3.7			0.146	
$\phi 1$		3.2			0.126	
$\phi 2$		1.5			0.059	

