




FCS-5065 2022 22: 1

Zoom Network Camera, 5-Megapixel, Outdoor, PoE 802.3af, Day & Night, IR LEDs, 12x, WDR

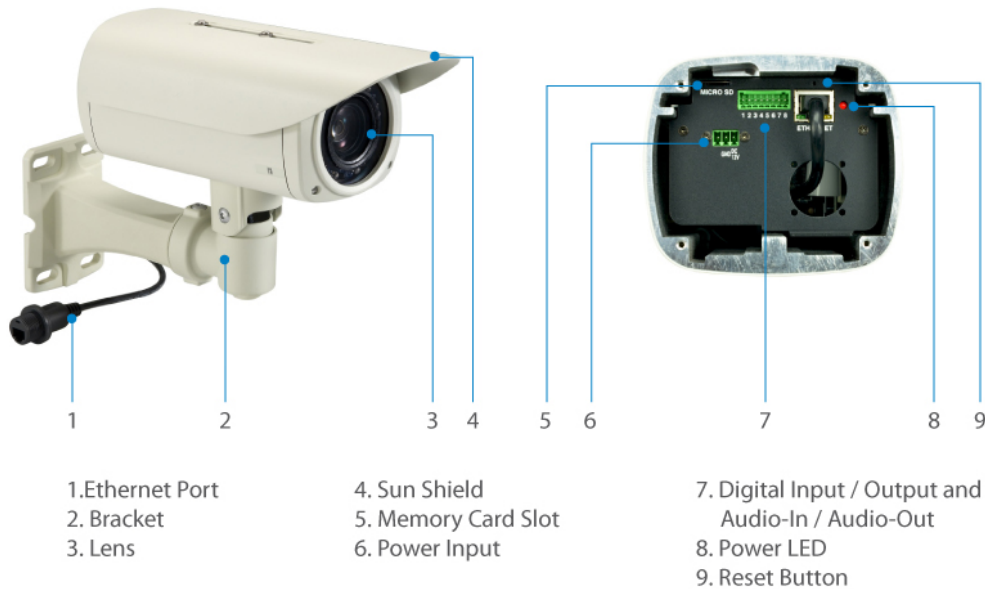

Key Features

- 22 202222 22 Micro SDHC/SDXC 22 22
- 5-20222 (2592 x 1944) 20222
- 22 22 222 22(-40°C to 50°C) 2022 20222 22 2 22 IP67-22
- 22 2222 222222 2 20222 22 WDR(22 22 22) 22
- Supports 12x optical zoom
- Vandal-proof IK10-rated housing
- 22 40 m22 22 222 222 22 2222 LED
- 22: H.264/MJPEG
- 22 2 22 22 2222 2222 IR-2 22
- 22 22 22: 12VDC/PoE (IEEE 802.3af)
- 22 64-22 22222 2022 22(OneSecure App 22)



System Specifications

Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet

IEEE 802.3u 100-BASE-TX, Fast Ethernet

IEEE 802.3af Power over Ethernet (PoE)

TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, IPv6, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP, UPnP, SNMP, Bonjour

Image Sensor:

5-Megapixel 1/3" Progressive Scan CMOS

Connectors and Cabling:

1 x RJ-45 10/100 Mbps PoE Port

1 x Line In

1 x Line Out

1 x Power terminal block

I/O terminal block (1 DI/1 DO)

Modularity:

1 x MicroSDHC/ MicroSDXC card slot

Button:

Reset Button

Indicator:

Power

Lens:

Zoom, DC iris, Auto focus, f5.2-62.4mm, F1.8-3.0

IR Cut Filter:

Removable infrared-cut filter for day & night function

IR LED:

27 Adaptive IR LEDs for illumination up to 40m

Shutter Time:

1/5 ~ 1/10,000 sec

Angle of View:

48.4° ~ 4.8°

Pan/Tilt/Zoom:

12x Optical Zoom, Digital Zoom to very high detail available on Software

Video Compression:

H.264 / MJPEG

Resolution:

5M (2592x1944)

Video Format:

RAW

Audio Compression:

G.711

Power:

Power Consumption: PoE Class 3 (IEEE802.3af) and DC 12V / 12W (built-in heater and IR on)

Power Input: DC 12V / 802.3af PoE

Features

Video:

Image Setting: - Adjustable image size, quality and bit rate
- Configurable brightness, sharpness, contrast, saturation, white balance and exposure
- AGC/AWB/AES
- Back Light Compensation (BLC)
- Wide Dynamic Range (WDR), Basic WDR (74 dB)
- 2D Noise Reduction (2DNR)
Streaming: Up to 2 video streams

Audio:

Streaming: 2-way audio
Input/Output: line input, line output

Performance**Data Transfer Rate:**

10/100Mbps

Storage Capacity:

SD/MicroSD memory card of up to 64GB

Frame Rate:

15 fps at 2592 x 1944; 15 fps at 2048 x 1536; 30 fps at 1920 x 1080; 30 fps at 1280 x 720; 30 fps at 640 x 480; 15 fps at 320x240

Minimum illumination:

Color: 0.1 lux at F1.8
B/W: 0 lux (IR LED on)

Environment**Temperature (°C):**

Operating: -40°C ~ 50°C

Humidity (Non-condensing):

Operating: 10% ~ 85%

Physical Specifications**Dimensions (W x D x H mm):**

122 x 240 x 101 mm

Weight (g):

2390 g

Enclosure:

Weather proof IP67-rated housing
Vandal proof IK10-rated

Others**Approval and Compliance:**


CE, FCC, ONVIF, IP67, IK10, NEMA 4X

Deployment:

Wall Mount

Operation Systems:

Microsoft Windows 8/7/Vista/XP

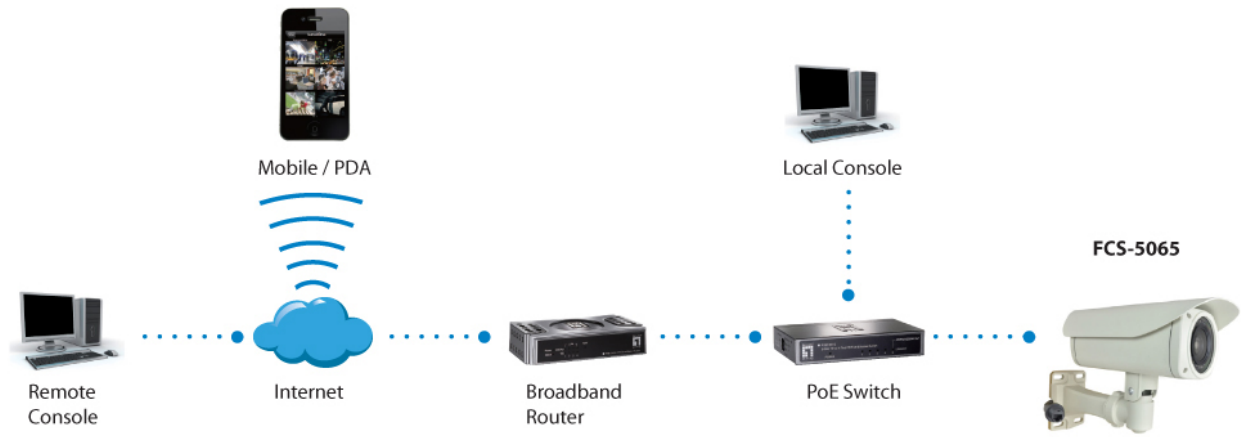

Order Information

FCS-5065

Package Contents

- FCS-5065
- Bracket
- Mounting Kit
- Screw Kit
- Quick Installation Guide
- Resource CD (User Manual, Utility, QIG)



CAS-2504
Pole Mount



CAS-3300
Ceiling Bracket

No liability or responsibility for any errors or omissions in the content.
 Specifications are subject to change without notice.
 All mentioned brand names are registered trademarks and property of their owners.
 Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.