
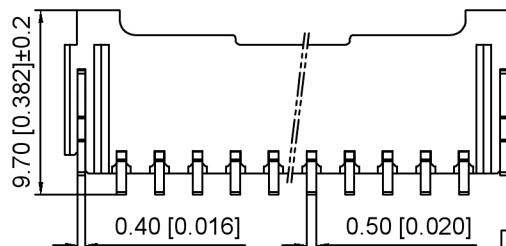
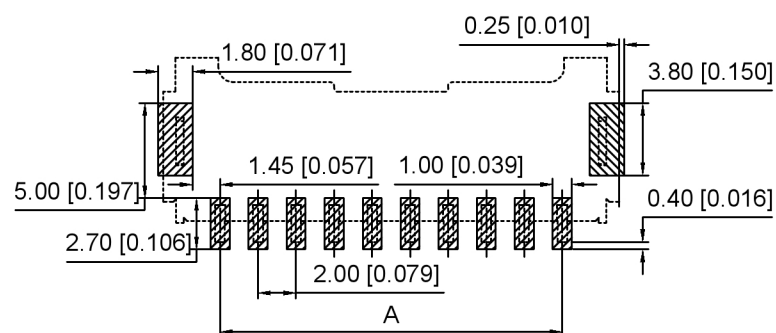
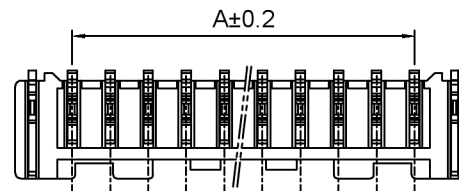


Specifications:
 规格:
 Voltage rating: 250V AC/DC
 额定电压: 250V AC/DC
 Current rating: 3A AC/DC
 额定电流: 3A AC/DC
 Withstanding voltage: 800V AC/minute
 耐受电压: 800V AC/分钟
 Temperature range: -25°C~+85°C
 温度范围: -25°C~+85°C
 Insulation resistance: 1000MΩ min
 绝缘电阻: 1000MΩ Min
 Contact resistance: 20mΩ Max
 接触电阻: 20mΩ Max

X2000 W R S - XX - 6T SN
 ① ② ③ ④ ⑤ ⑥ ⑦

1. Series No
2. Category: W-Wafer
3. Welding Board Angle: R-Stright 90°
4. Weding Way: S-SMT
5. Row No. Pin No: XX-02~15P
6. Material: 6T-PA6T UL94V-0 Beige
7. Plating: SN-Tin Plated

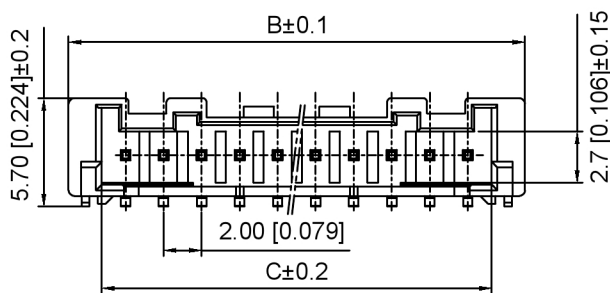

| Poles | Dimensions(mm) | | | Poles | Dimensions(mm) | | |
|-------|----------------|-------|-------|-------|----------------|-------|-------|
| | A | B | C | | A | B | C |
| 02 | 2.00 | 8.00 | 4.55 | 09 | 16.00 | 22.00 | 18.55 |
| 03 | 4.00 | 10.00 | 6.55 | 10 | 18.00 | 24.00 | 20.55 |
| 04 | 6.00 | 12.00 | 8.55 | 11 | 20.00 | 26.00 | 22.55 |
| 05 | 8.00 | 14.00 | 10.55 | 12 | 22.00 | 28.00 | 24.55 |
| 06 | 10.00 | 16.00 | 12.55 | 13 | 24.00 | 30.00 | 26.55 |
| 07 | 12.00 | 18.00 | 14.55 | 14 | 26.00 | 32.00 | 28.55 |
| 08 | 14.00 | 20.00 | 16.55 | 15 | 28.00 | 34.00 | 30.55 |

| | | | |
|------------------|----------|---------------|----------------------|
| X2000WRS-XX-6TSN | PA6T | Brass | X2000H |
| PART NO | Material | Material(Pin) | Suitable XKB Housing |

PCB LAYOUT

| | | |
|------|-------------|--|
| DSND | SCALE: N/A | MODEL TYPE: 2.0mm Crimp Style Connector |
| DWN | VIEW: | PART NO.: X2000WRS-XX-6TSN |
| CHKD | UNIT: mm/in | DWG NO.: X-X2000WRS-XX-6TSN |
| APPD | SIZE: A4 | |



XKB INDUSTRIAL PRECISION CO., LIMITED

| | | |
|--------|-------|----------|
| WEIGHT | SHEET | REVISION |
| | 1/1 | A0 |

广东星坤科技股份有限公司

| | |
|------|-------------|
| 生 | 日期 |
| 效 | |
| MARK | DESCRIPTION |

文件工程章

| | | | | | | | |
|--|--|--|--|--|--|------------------------|------|
| | | | | | | ANGULAR | ±5° |
| | | | | | | L ≤ 4 | ±0.2 |
| | | | | | | 4 < L ≤ 16 | ±0.3 |
| | | | | | | 16 < L ≤ 63 | ±0.4 |
| | | | | | | L > 63 | ±0.5 |
| | | | | | | UNSPECIFIED TOLERANCES | |

REVISIONS

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn