



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B2	REVISED PER ECO-15-010004	13JUL2015	NK	MZ

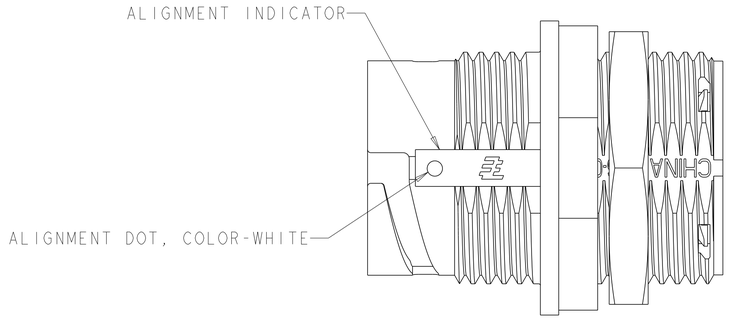

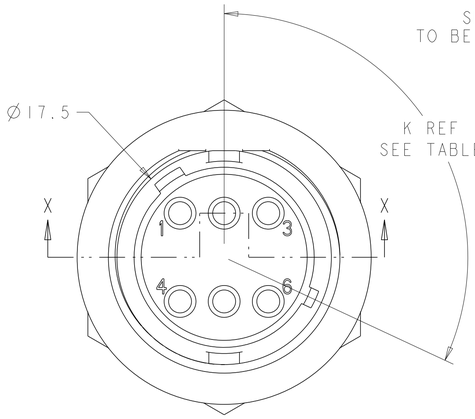


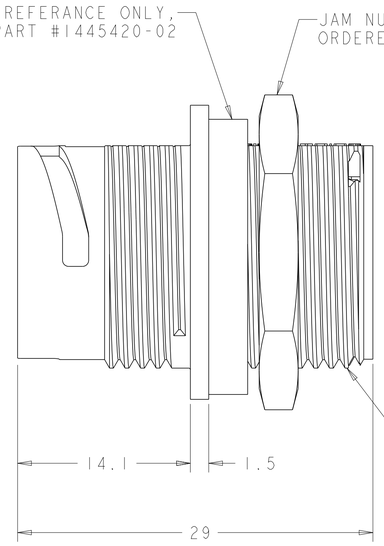

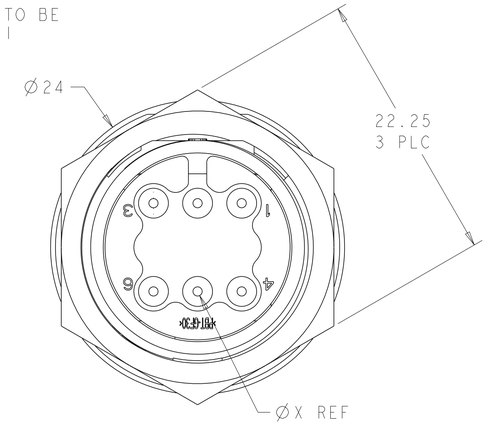

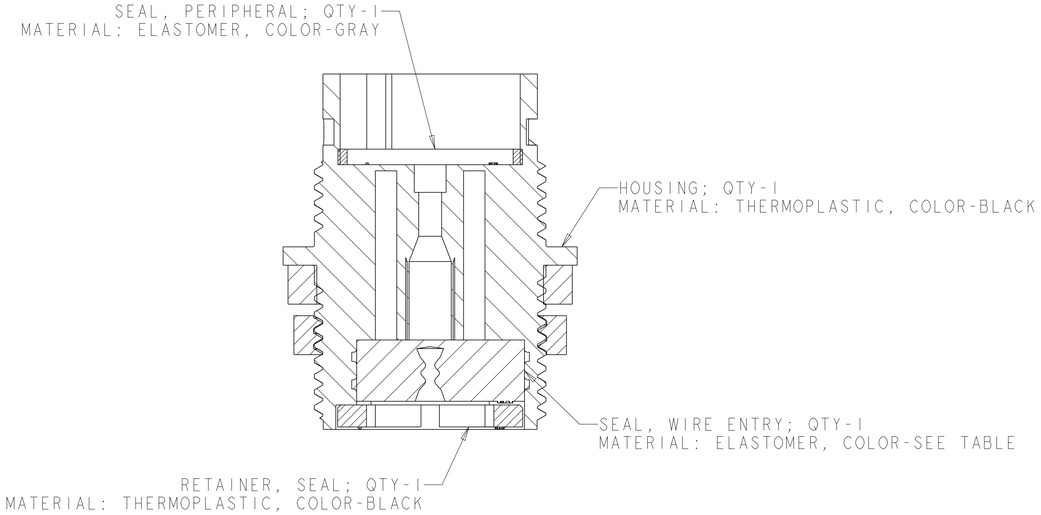

SECTION X-X

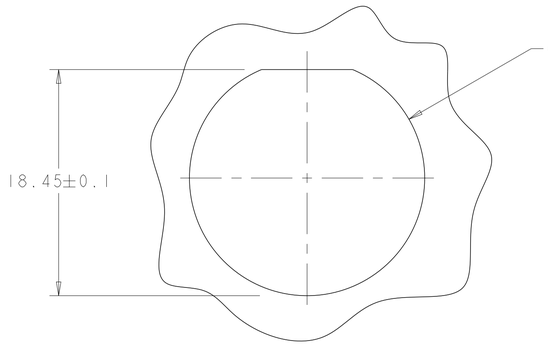

SUGGESTED PANEL CUTOUT 2

1. CONNECTOR CAN BE FRONT OR REAR PANEL MOUNTED.
2. MAX PANEL THICKNESS - 3.18

SEAL, WIRE ENTRY COLOR	ØX REF	K REF	PART NUMBER
YELLOW	Ø0.75	135°	1445823-04
NATURAL	Ø1.5	115°	1445823-03
NATURAL	Ø1.5	135°	1445823-02
YELLOW	Ø0.75	115°	1445823-01

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±0.13
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL: SEE CALLOUT
FINISH: SEE CALLOUT

DWN SHANE WIEST 15OCT2001
CHK G DOUTY 15OCT2001
APVD H.WAKEEM 13JUN2003
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME ASSEMBLY, RECEPTACLE, SIZE 11, 6 POSITION, PANEL MOUNT, SEALED, MINI CPC

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-1445823	-

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV B2