TAIWAN SEMICONDUCTOR


KBU601G - KBU607G

Single Phase 6.0AMPS. Glass Passivated Bridge Rectifiers

RoHS COMPLIANCE



KBU

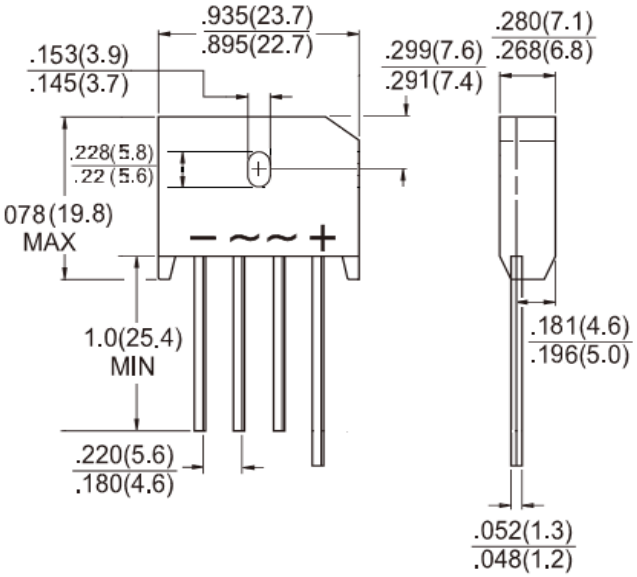


Features

- ✧ UL Recoganized File #E-326243
- ✧ Glass passivated junction
- ✧ Ideal for printed circuit board
- ✧ High case dielectric strength
- ✧ Plastic material has Underwriters Laboratory flammability Classification 94V-0
- ✧ Typical IR less than 0.1uA
- ✧ High surge current capability
- ✧ High temperature soldering guaranteed: 260℃/10 seconds at 5 lbs.,(2.3kg) tension
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode

Mechanical Data

- ✧ Case: Molded plastic body
- ✧ Terminals: Pure tin plated, lead free, solderable per MIL-STD-202, Method 208
- ✧ Weight: 7.2 grams
- ✧ Mounting Torque: 5 in lbs max.

Dimensions in inches and (millimeters)



Marking Diagram

KBU60XG	= Specific Device Code
G	= Green Compound
Y	= Year
WW	= Work Week

Maximum Ratings and Electrical Characteristics

Rating at 25 ℃ ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Type Number	Symbol	KBU 601G	KBU 602G	KBU 603G	KBU 604G	KBU 605G	KBU 606G	KBU 607G	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @T_A=65℃	$I_{F(AV)}$	6							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	175							A
Rating of fusing (t<8.3mS)	I^2t	127							A^2S
Maximum Instantaneous Forward Voltage (Note 1) @ 3 A @ 6 A	V_F	1.0 1.1							V
Maximum DC Reverse Current @T_A=25℃ at Rated DC Blocking Voltage @T_A=125 ℃	I_R	5.0 500							uA
Typical Junction Capacitance per leg (Note 2)	Cj	400							pF
Typical Thermal Resistance	$R_{\theta JA}$ $R_{\theta JC}$	8.6 3.1							$^OC/W$
Operating Temperature Range	T_J	- 55 to + 150							^OC
Storage Temperature Range	T_{STG}	- 55 to + 150							^OC

Note 1 : Pulse Test with PW=300u sec, 1% Duty Cycle

Note 2 : Measured at 1MHz and applied Reverse Voltage of 4.0V D.C.

TAIWAN SEMICONDUCTOR

RATINGS AND CHARACTERISTIC CURVES (KBU601G THRU KBU607G)

FIG.1 MAXIMUM DERATING CURVE FOR OUTPUT CURRENT

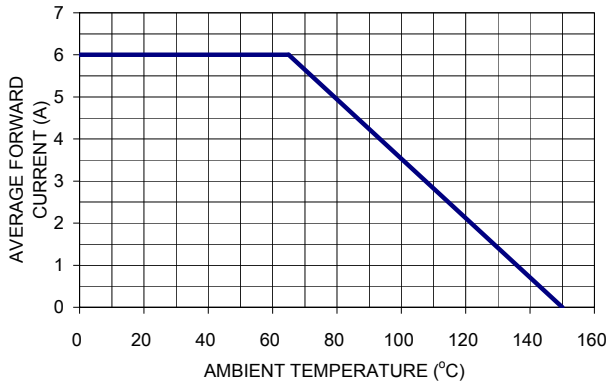


FIG. 2 MAXIMUM FORWARD SURGE CURRENT PER LEG

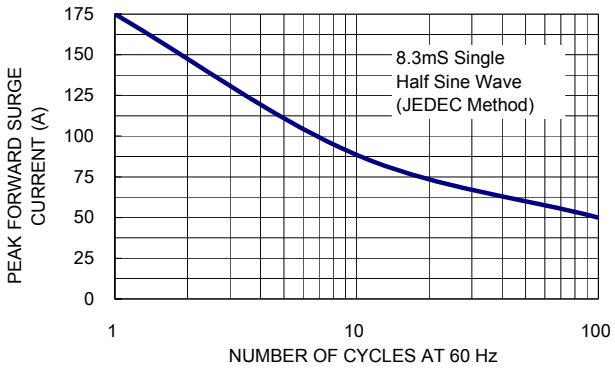


FIG. 3 TYPICAL REVERSE CHARACTERISTICS PER LEG

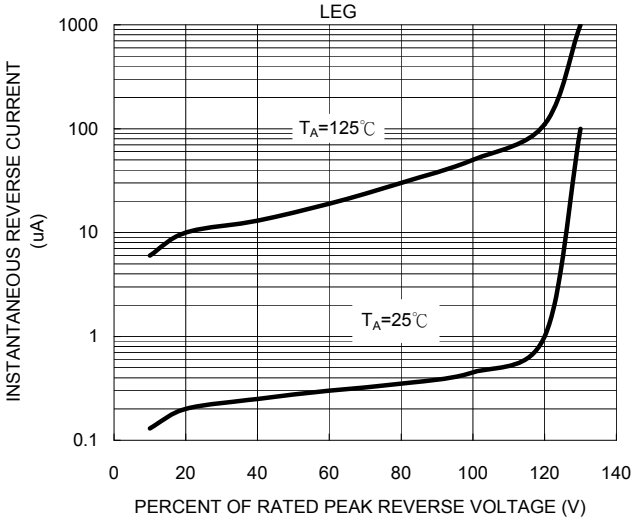


FIG. 4 TYPICAL FORWARD CHARACTERISRICS PER LEG

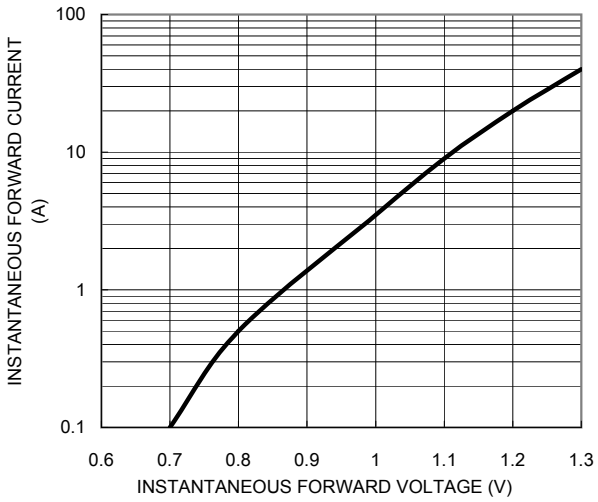


FIG. 5 TYPICAL JUNCTION CAPACITANCE

