

Han High Temp 10E-c Female

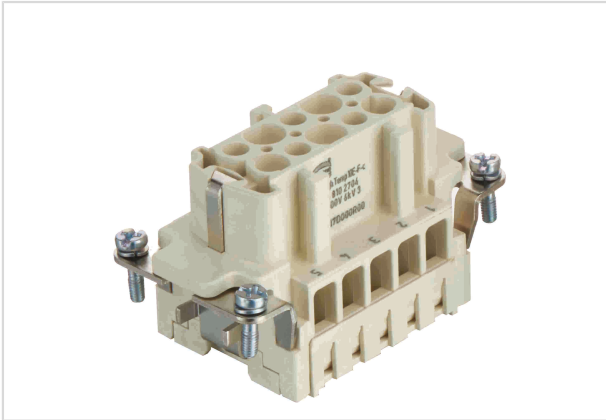


Image is for illustration purposes only. Please refer to product description.

| | |
|--------------------|---|
| Part number | 09 33 810 2704 |
| Specification | Han High Temp 10E-c Female |
| HARTING eCatalogue | https://b2b.harting.com/09338102704 |

Identification

| | |
|----------|------------------------------|
| Category | Inserts |
| Series | Han E [®] High Temp |

Version

| | |
|--------------------|---|
| Termination method | Crimp termination |
| Gender | Female |
| Size | 10 B |
| Number of contacts | 10 |
| PE contact | Yes |
| Details | Please order crimp contacts separately. |

Technical characteristics

| | |
|-------------------------|--|
| Conductor cross-section | 0.5 ... 2.5 mm ² |
| Conductor cross-section | AWG 20 ... AWG 14 |
| Rated current | 16 A |
| Rated voltage | 500 V |
| Rated impulse voltage | 6 kV |
| Pollution degree | 3 |
| Insulation resistance | >10 ¹⁰ Ω |
| Limiting temperature | -40 ... +200 °C With Han [®] High Temp components |
| Mating cycles | ≥500 |



Pushing Performance

Material properties

| | |
|---|------------------------------|
| Material (insert) | Liquid crystal polymer (LCP) |
| Material flammability class acc. to UL 94 | V-0 |
| RoHS | compliant |
| ELV status | compliant |
| China RoHS | e |
| REACH Annex XVII substances | No |
| REACH ANNEX XIV substances | No |
| REACH SVHC substances | No |

Specifications and approvals

| | |
|----------------|-------------------------|
| Specifications | EN 60664-1 IEC 61984 |
| UL / CSA | UL 1977 ECBT2.E235076 |

Commercial data

| | |
|--------------------------------|---|
| Packaging size | 1 |
| Net weight | 58.67 g |
| Country of origin | Romania |
| European customs tariff number | 85366990 |
| eCl@ss | 27440205 Contact insert for industrial connectors |