
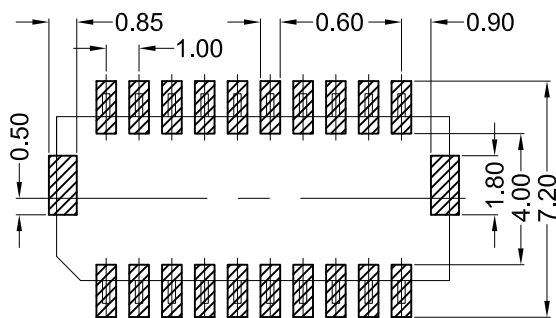



**SPECIFICATIONS**

1. Voltage rating: 50V AC, DC
  2. Current rating: 1A, AC, DC
  3. Withstanding Voltage: 500V AC/minute
  4. Insulation resistance: 100M min
  5. Temperature range: -25 ° C - +85 ° C
  6. Contact resistance: 20m max
- WAFER

Housing Material: PA9T UL 94V0  
 Pin Material: Phosphor Bronze or Brass  
 Contact Area Plating: Plated Tin or Plated Gold  
 Mates with :P1010 series Housing  
 Poles: 02-20P  
 Part No.: M1010VS-2xXX-9T-R

R=卷装 无=管装  
 Pin位数

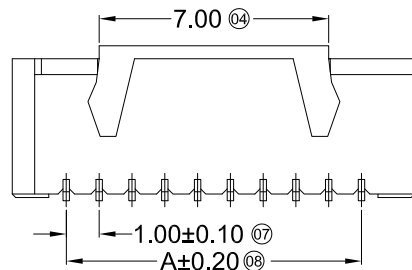

Recommand PCB Layout  
 General Tolerance ± 0.05

Poles	Dimensions(mm)	
	A	B
10	4.00	7.30
12	5.00	8.30
16	7.00	10.30
20	9.00	12.30
30	14.00	17.30
40	19.00	22.30
50	24.00	27.30

WWW.XFCN.COM

TOLERANCE UNLESS OTHERWISE

X.	±0.30	X°	±5°
.X	±0.20	.X°	±2°
.XX	±0.08	.XX°	±1°
.XXX	±0.03	.XXX°	±0.5°

DRAWN CK tan

CHKD	
APPD	
VIEW	

**XFCN**兴飞连接器有限公司  
 CONNECTORS XFCN CONNECTORS CO., LTD.

PRODUCT NAME 1.00mm Crimp Style Connectors

PART. NO. M1010VS-2xXX-9T

SHEET 1/1

DATE 2010. 4. 12

UNITS mm

SCALE 1:1

DWG. NO. 009

AO  
VER

MODIFICATION

DRAW

DATE