

1

2

3

4

A

A

Product Specification:

Material:

Insulator: Glass-Filled Thermoplastic PBT, UL94V-0 rated

Contact: Brass or Phosphor Bronze

Shell: Steel, 100u" Tin over 50u" min Nickel

Clinch Nut: Brass: 100u" min Nickel Plated

Boardlock: Brass: 100u" min Nickel Plated

Screwlock: Brass: 100u" min Nickel Plated

Electrical:

Contact Resistance: 20 milliohms Max at 1 AMP DC

Insulation Resistance: 1000 magohms at 500 VDC


Dielectric Withstanding Voltage: 1000 VAC/rms 60Hz
for 1 minute

Current Rating: 5 Amp

Voltage Rating: 250 VAC/rms 60Hz


B

B

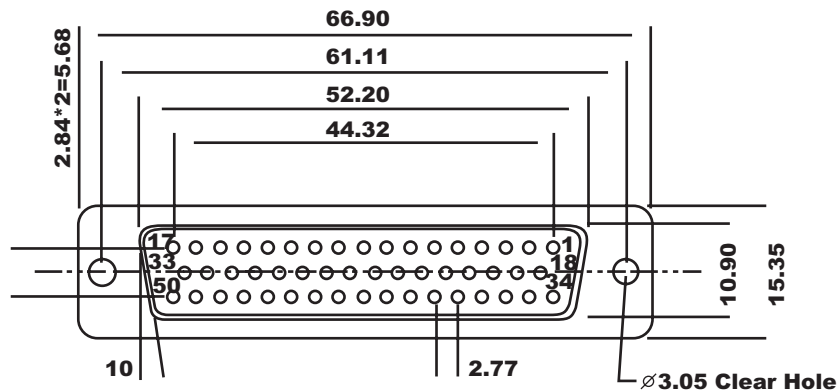

C

C

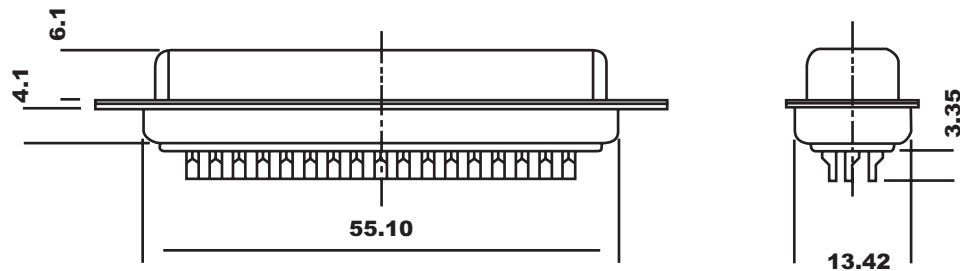

D

D

Description

Name :

A-DF50LL-TL-B

ASSMANN
Electronic Components

RoHS
Compliant

THIS DRAWING IS UNPUBLISHED

© Copyright 2005 by Assmann Electronic Components All International Rights Reserved

This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.

1

2

3

4