
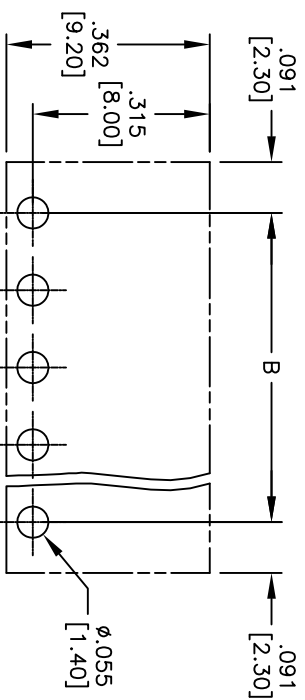




Rev	AWO #	Description	Date	Appr
-		RELEASED	9/06/10	

APPROVED: _____ TITLE: _____

DATE: _____

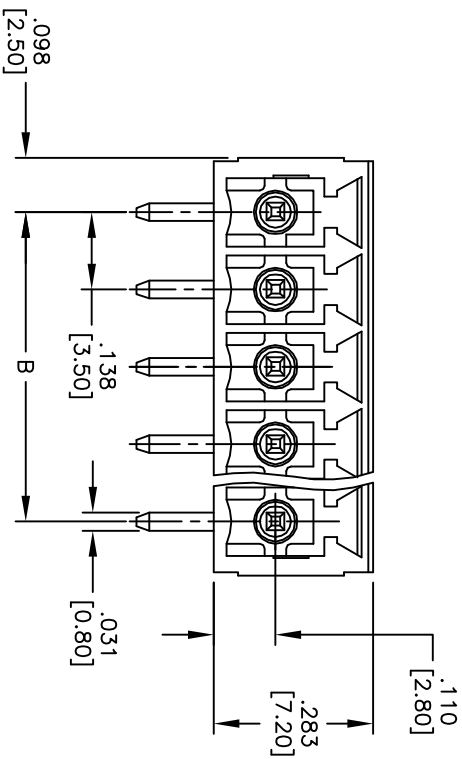

RECOMMENDED PCB LAYOUT

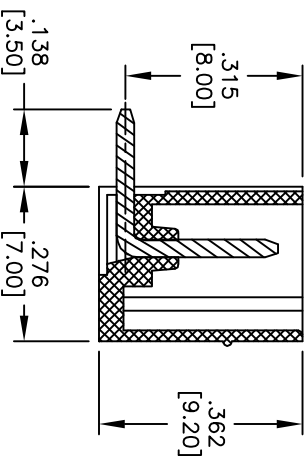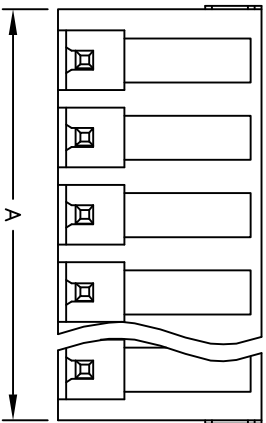

Poles: 2 thru 24
 A = .138 [3.50] x No. of (Poles - 1) + .181 [4.60]
 B = .138 [3.50] x No. of (Poles - 1)

SPECIFICATIONS:

- Material: Insulator: Thermoplastic, rated UL 94V-0
 Insulator color: Green
 Contact: Brass, Tin plated
 Electrical: Operation voltage: 300 VAC max
 Current rating: 10 Amps max
 Withstanding voltage: 1.6KV
 Environmental: Operating temperature: -40°C to +115°C
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	MM
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **.138 [3.50] TERMINAL BLOCK**

APPROVALS		DATE
DRAWN	DY	9/06/10
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	EB3-XX-A	

REF: S0000TT SCALE: NTS SHEET 1 OF 1