

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0716612513](#)
Status: **Active**
Overview: [ebbi_50d](#)
Description: 1.27mm (.050") Pitch EBBI™ 50D Plug, Right Angle, Blind-Mate, 130 Circuits, 2.79mm (.110") PC Tail Length

Documents:

3D Model	Product Specification PS-71660 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	71661
Application	Board-to-Board, Wire-to-Board
Overview	ebbi_50d
Product Name	EBBI™

Physical

Breakaway	No
Circuits (Loaded)	130
Circuits (maximum)	130
Color - Resin	Black
Durability (mating cycles max)	2,000
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	Yes
Keying to Mating Part	None
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Number of Rows	2
Orientation	Right Angle
PC Tail Length (in)	0.110 In
PC Tail Length (mm)	2.79 mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness Recommended (in)	0.062 In
PCB Thickness Recommended (mm)	1.60 mm
Packaging Type	Tray
Pitch - Mating Interface (in)	0.050 In
Pitch - Mating Interface (mm)	1.27 mm
Pitch - Term. Interface (in)	0.050 In
Pitch - Term. Interface (mm)	1.27 mm
Plating min: Mating (µin)	30
Plating min: Mating (µm)	0.76
Plating min: Termination (µin)	50
Plating min: Termination (µm)	1.30
Polarized to Mating Part	Yes
Polarized to PCB	Yes

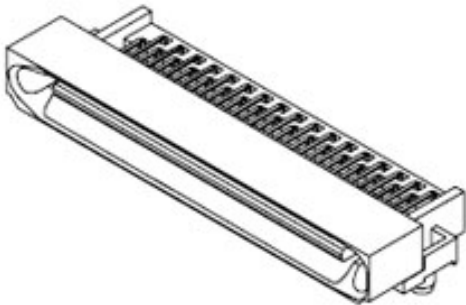


image - Reference only

Series

EU RoHS

**ELV and RoHS
Compliant**
**REACH SVHC
Contains SVHC: No**
**Halogen-Free
Status**
Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[71661Series](#)


Mates With

EBBI™ 50D Receptacle [71660](#) , [87537](#)



Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	1A
Voltage - Maximum	30V
Solder Process Data	
Lead-free Process Capability	SMC & Wave Capable (TH only)
Process Temperature max. C	235
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-70873-084*
Product Specification	PS-71660
Sales Drawing	SDA-71661-25**

This document was generated on 05/31/2010


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

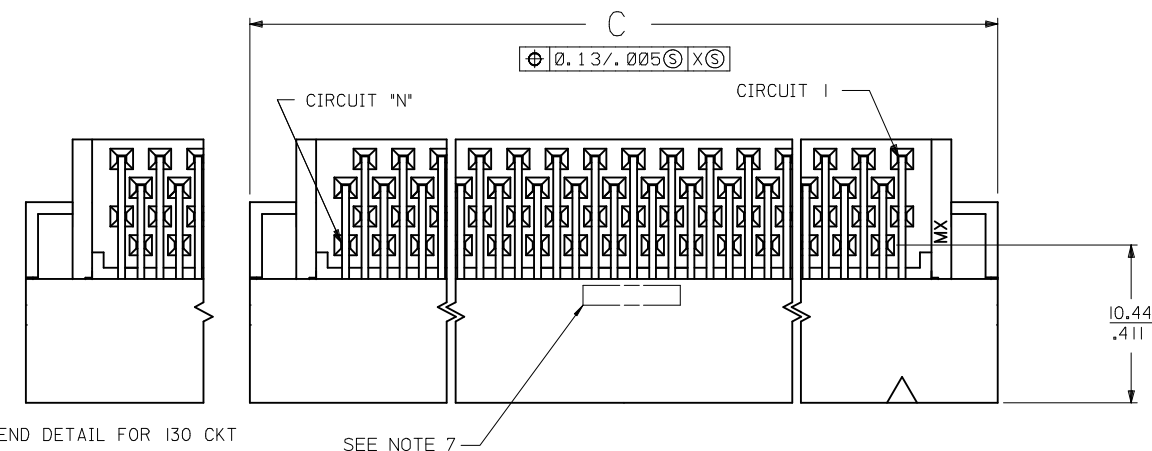


- NOTES:
1. MATERIAL:
HOUSING: LIQUID CRYSTAL POLYMER (LCP), GLASS-FILLED, UL94V-0,
COLOR: BLACK
TERMINALS: BRASS
 2. FINISH:
TERMINAL: 0.76 MICROMETERS/30 MICROINCHES MINIMUM SELECTIVE GOLD
IN CONTACT AREA; 1.27 MICROMETERS/50 MICROINCHES MINIMUM
SELECTIVE TIN IN THE PC TAIL AREA; NICKEL UNDERPLATE OVERALL.
 3. CONFORMS TO PRODUCT SPEC: PS-71660
 4. PRODUCT PACKAGED PER PK-70873-084*
 5. ASSEMBLY MATES WITH MOLEX P/N SDA-71660-7***
 6. RECOMMENDED PC BOARD THICKNESS IS 1.6 MM/.062 IN
 7. FOUR DIGIT DATE CODE (WK.YR.) EXAMPLE 26 96 LOCATED IN AREA SHOWN

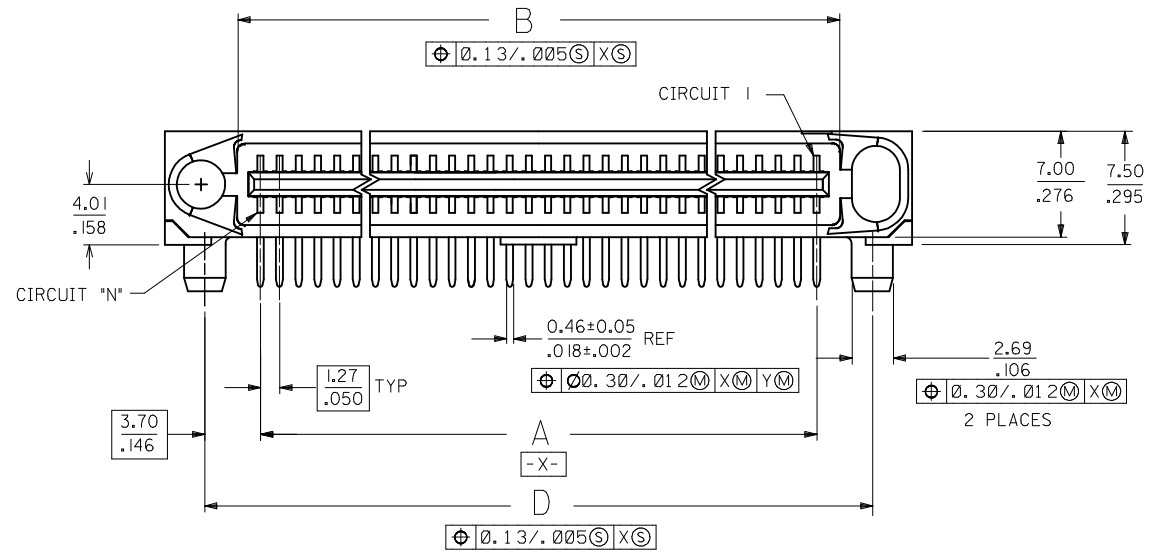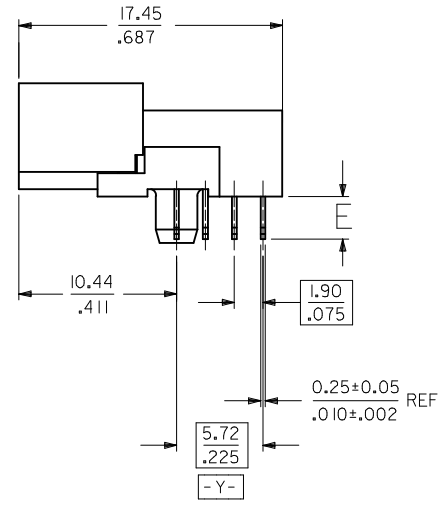

CHANGE MATERIAL EC NO: UCP2009-1254 DRWN:MSIBARRA 2008/12/19 CHKD:BSMART 2009/01/06 APPR:SMILLER 2009/01/06 K	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 4:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION 			
				mm	INCH	DRAWN BY RAN	DATE 1995/04/26	TITLE SALES ASSMBLY EBBI 50D RIGHT ANGLE BLIND MATE PLUG				
			4 PLACES	± ---	± ---	CHECKED BY	DATE					
			3 PLACES	± ---	± .010	RAN	1995/04/26	MOLEX INCORPORATED				
			2 PLACES	± 0.25	± ---	APPROVED BY CAB	DATE 1995/04/26					
1 PLACE	± ---	± ---	ANGULAR ±1/2°		SHEET NO. 1 OF 2							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO. SEE TABLE							INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
REV					SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX						

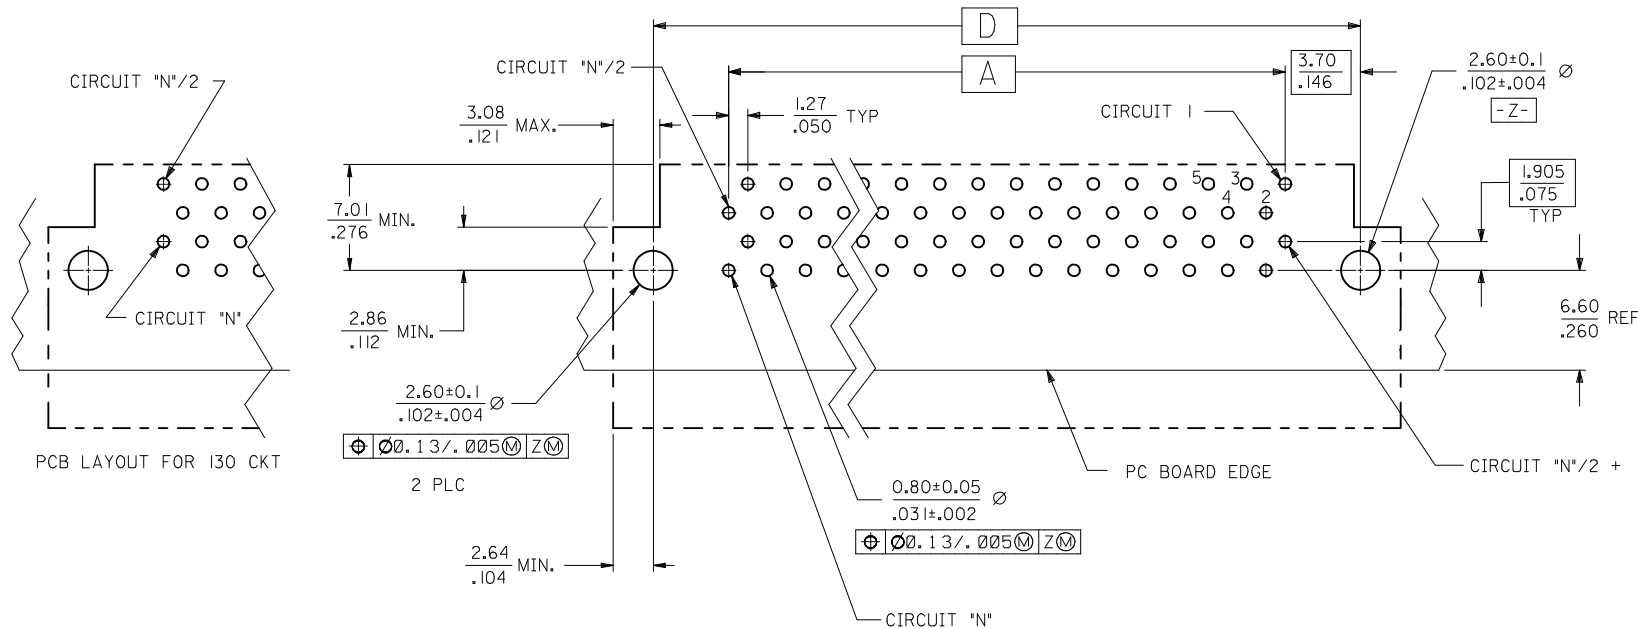

RECOMMENDED PC BOARD LAYOUT
COMPONENT SIDE
SEE NOTE 6

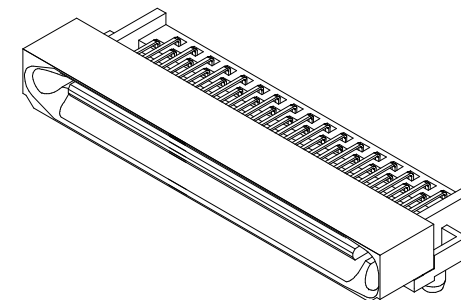

68 CIRCUIT ASSEMBLY SHOWN
SCALE 2:1

3.491 (88.67)	3.699 (93.95)	3.320 (84.33)	3.200 (81.28)	.110 (2.79)	130	71661-2513
2.741 (69.63)	2.949 (74.90)	2.570 (65.28)	2.450 (62.23)	.110 (2.79)	100	71661-2511
2.241 (56.92)	2.449 (62.20)	2.070 (52.586)	1.950 (49.53)	.110 (2.79)	80	71661-2580
1.941 (49.31)	2.149 (54.58)	1.770 (44.96)	1.650 (41.91)	.110 (2.79)	68	71661-2568
1.941 (49.31)	2.149 (54.58)	1.770 (44.96)	1.650 (41.91)	.125 (3.18)	68	71661-2518
1.241 (31.53)	1.449 (36.80)	1.070 (27.18)	.950 (24.13)	.110 (2.79)	40	71661-2540
D	C	B	A	E	CKT (*N*)	ITEM NUMBER

REV	DESCRIPTION
1	UPDATE REV LEVEL
2	EC NO: UCP2009-1254
3	DRWN:MS BARRA 2008/12/19
4	CHKD:BSMART 2009/01/06
5	APPR:SMILLER 2009/01/06
6	REV
7	DESCRIPTION
8	QUALITY SYMBOLS
9	▽=0
10	▽=0
11	REV
12	DESCRIPTION

GENERAL TOLERANCES (UNLESS SPECIFIED)	
mm	INCH
4 PLACES ± ---	± ---
3 PLACES ± ---	± .010
2 PLACES ± 0.25	± ---
1 PLACE ± ---	± ---
ANGULAR ± 1/2°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE MM/IN	
DRAWN BY	DATE
RAN	1995/04/26
CHECKED BY	DATE
RAN	1995/04/26
APPROVED BY	DATE
CAB	1995/04/26
MATERIAL NO.	SEE TABLE
SIZE	C

SCALE 4:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
SALES ASSMBLY		
EBBI 50D RIGHT ANGLE		
BLIND MATE PLUG		
MOLEX INCORPORATED		
DOCUMENT NO. SDA-71661-25**		SHEET NO. 2 OF 2
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		