

RoHS Compliant Product
A suffix of "-C" specifies halogen free



FEATURES

- High Surge Capacity
- 150°C Operating Junction Temperature
- Low Power Loss, High Efficiency
- High-Switching Speed 50 Nanosecond Recovery Time
- Low Forward Voltage, High Current Capability
- Low Stored Charge Majority Carrier Conduction
- Plastic Material Used Carries Underwriters Laboratory Flammability Classification 94V-0

ORDER INFORMATION

Part Number	Type
SF10H60F	Lead (Pb)-free
SF10H60F-C	Lead (Pb)-free and Halogen-free

ITO-220A

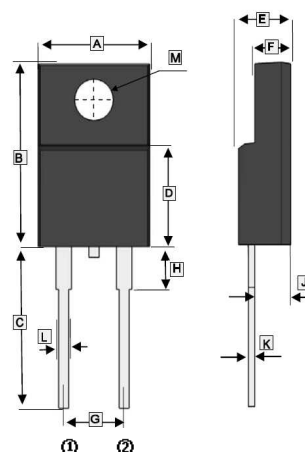

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	9.50	10.70	G	3.60	5.90
B	14.40	15.90	H	3.45	4.50
C	12.70	14.20	J	2.10	3.20
D	8.40TYP		K	0.40	0.80
E	4.20	5.10	L	0.30	0.90
F	2.50	3.56	M	φ 2.60	φ 3.80

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, de-rate current by 20%.)


Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	600	V
Working Peak Reverse Voltage	V_{RWM}	600	V
DC Blocking Voltage	V_R	600	V
Average Rectifier Forward Current	$I_{F(AV)}$	10	A
Non-Repetitive Peak Surge Current @ Surge applied at rate load conditions half-wave, single phase, 60Hz	I_{FSM}	110	A
Max. Instantaneous Forward Voltage @ $I_F=10A$	V_F	1.35	V
Max. Instantaneous Reverse Current ²	$T_J=25^{\circ}C$	5	μA
	$T_J=100^{\circ}C$	20	
Reverse Recovery Time ³	T_{RR}	50	nS
Typical Junction Capacitance ¹	C_J	50	pF
Thermal Resistance	$R_{\theta JC}$	4	$^{\circ}C / W$
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55~+150	$^{\circ}C$

Notes:


1. Measured at 1MHz and applied reverse voltage of 5V D.C.
2. Pulse Test: Pulse Width=300 μs , Duty Cycle $\leq 2\%$.
3. $I_F=0.5A$, $I_R=1A$, $I_{RR}=0.25A$.

RATINGS AND CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

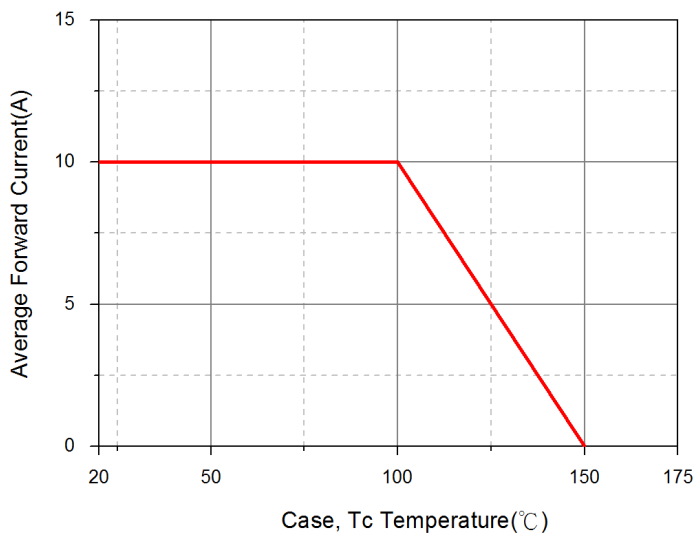


Typical Forward Characteristic

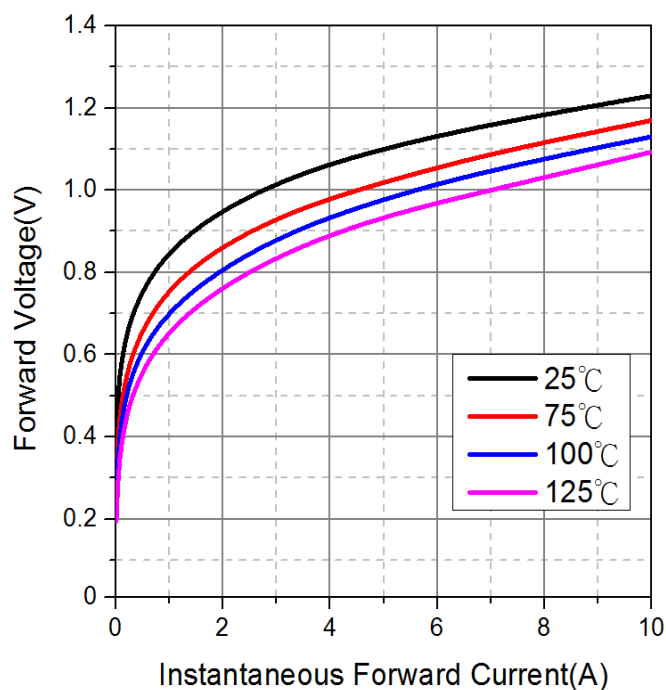

Typical Junction Capacitance

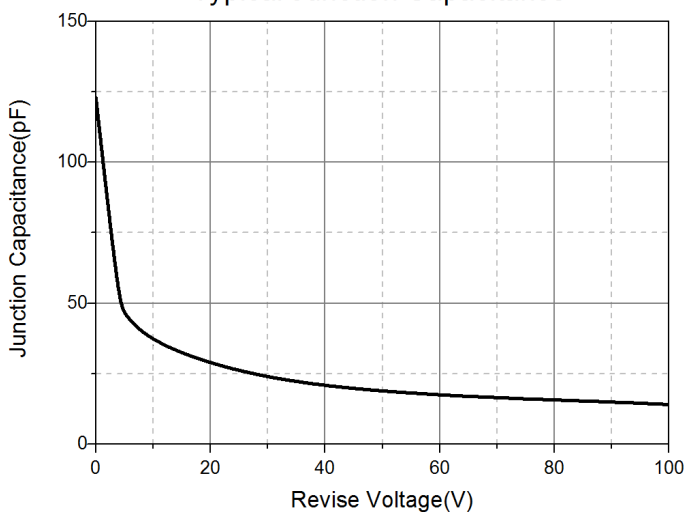

Typical Reverse Characteristic

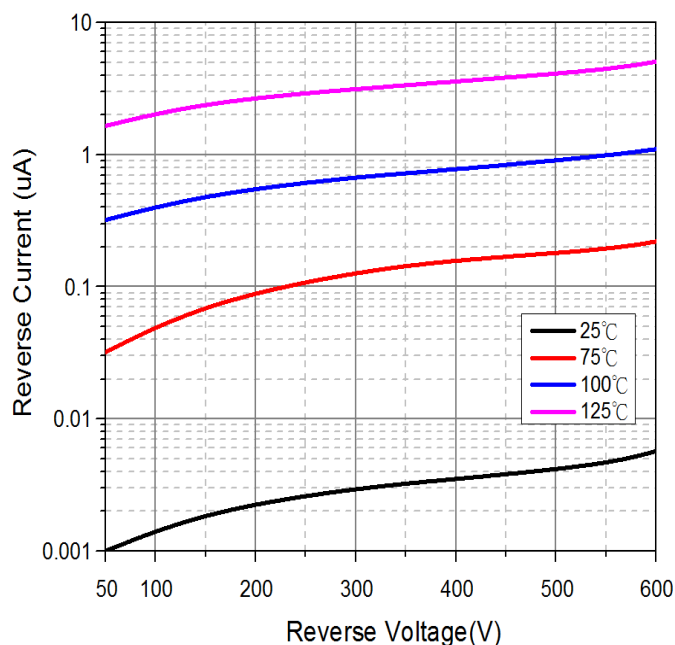

Maximum Non-Repetitive Forward Surge Current

