



N Male to N Female LSZH Jacketed Cable 200 CM  
Length Using SR402FLJ Low PIM Coax, RoHS

TECHNICAL DATA SHEET

PE3C2001-200CM

**Configuration**

Connector 1	N Male
Connector 2	N Female
Cable Type	PE-SR402FLJ Low PIM

**Electrical Specifications**

Frequency Range	DC to 6 GHz
Impedance	50 Ohms
Maximum VSWR	1.25:1
RF Shielding	-100 dB
Maximum Input Power	440 Watts
Passive Intermodulation	-160 dBc

**Typical Performance by Frequency**

**Frequency 1**

Frequency	500 MHz
Insertion Loss,	0.5 dB
Power Handling, Watts	440

**Frequency 2**

Frequency	1000 MHz
Insertion Loss	0.82 dB
Power Handling	300 Watts

**Frequency 3**

Frequency	2 GHz
Insertion Loss	1.2 dB
Power Handling	220 Watts

**Frequency 4**

Frequency	2.5 GHz
Insertion Loss	1.37 dB
Power Handling	190 Watts

**Frequency 5**

Frequency	3 GHz
Insertion Loss	1.5 dB
Power Handling	170 Watts

**Frequency 6**

Frequency	6 GHz
Insertion Loss	2 dB
Power Handling	130 Watts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male to N Female LSZH Jacketed Cable 200 CM Length Using SR402FLJ Low PIM Coax, RoHS PE3C2001-200CM





N Male to N Female LSZH Jacketed Cable 200 CM  
Length Using SR402FLJ Low PIM Coax, RoHS

TECHNICAL DATA SHEET

PE3C2001-200CM

**Mechanical Specifications**

**Temperature**

Temperature Operating Range -55 to +125 deg C

**Size**

Length 78.74 in [200 cm]

One Time Minimum Bend Radius 1.5 in [38.1 mm]

**Cable**

Cable Type PE-SR402FLJ Low PIM

Cable Inner Conductor Copper, Silver

Cable Outer Conductor Copper, Tin

Dielectric Type PTFE

Jacket Material PVC LSZH

Jacket Diameter 0.163 in [4.14 mm]

**Connector 1**

Type N Male

Configuration Straight

Inner Conductor Material and Plating Brass, Silver

Coupling Nut Material and Plating Brass, Tri-Metal

Hex Size 3/4 inch

Body Material and Plating Brass, Silver

Dielectric Type PTFE

**Connector 2**

Type N Female

Configuration Straight

Inner Conductor Material and Plating Beryllium Copper, Silver

Hex Size 3/4 inch

Body Material and Plating Brass, Silver

Dielectric Type PTFE

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant Yes

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Female LSZH Jacketed Cable 200 CM Length Using SR402FLJ Low PIM Coax, RoHS PE3C2001-200CM](#)



N Male to N Female LSZH Jacketed Cable 200 CM  
Length Using SR402FLJ Low PIM Coax, RoHS

TECHNICAL DATA SHEET

PE3C2001-200CM

Notes:

- Values at +25 °C, sea level

N Male to N Female LSZH Jacketed Cable 200 CM Length Using SR402FLJ Low PIM Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Female LSZH Jacketed Cable 200 CM Length Using SR402FLJ Low PIM Coax, RoHS PE3C2001-200CM](http://www.pasternack.com/n-male-n-female-sr402flj-low-pim-cable-assembly-pe3c2001-200cm-p.aspx)

URL: <http://www.pasternack.com/n-male-n-female-sr402flj-low-pim-cable-assembly-pe3c2001-200cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3C2001-200CM CAD Drawing

N Male to N Female LSZH Jacketed Cable 200 CM Length  
Using SR402FLJ Low PIM Coax, RoHS

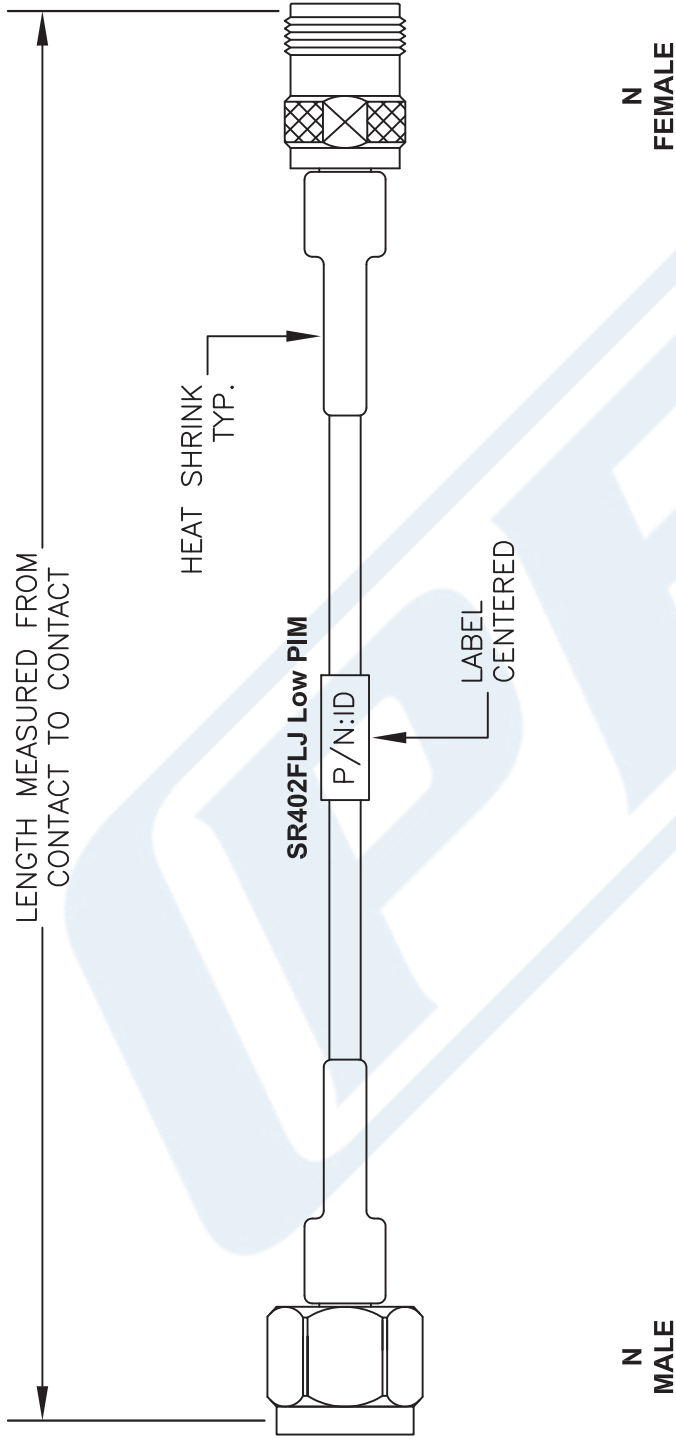

How To Order		Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
<b>Part Number Configuration</b> PE3 [zzz] [yy] - [xx] [uu] 00 - 99999 LF = RoHS Compliant < Blank > = Standard Note: LF applies only to RF cables		-12	12"	-25CM	25Cm
Examples PE3000LF-100 PE3000-100 PE3000LF-100CM PE3000-100CM CM = Centimeters < Blank > = Inches _____ Length		-24	24"	-50CM	50Cm
		-36	36"	-75CM	75Cm
		-48	48"	-100CM	100Cm
		-60	60"	-125CM	125Cm
		-XX	Custom Length	-XXCM	Custom Length

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].  
 4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

DWG TITLE  
**PE3C2001**

**PE PASTERNAK**  
 THE ENGINEER'S RF SOURCE  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919	CAD FILE 062514	SCALE N/A	SIZE A	2233
----------------	-----------------	-----------	--------	------