


| 6                 |                    | 5                     |                            | 4                   |                    | 3                             |                                                                                                     | 2                                                                                                      |                                | 1 |  |
|-------------------|--------------------|-----------------------|----------------------------|---------------------|--------------------|-------------------------------|-----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|--------------------------------|---|--|
| CATALOG<br>NUMBER | MATERIAL<br>NUMBER | CABLE<br>RANGE        | NOMINAL<br>ROD<br>DIAMETER | LENGTH<br>"M"       | LENGTH<br>"B"      | BREAK<br>STRENGTH*<br>(LBS/N) | <br>UL<br>LISTED | <br>CSA<br>APPROVED | PRODUCT<br>SELECTION<br>NUMBER |   |  |
| 35901             | 1300950146         | .50-.61 / 12.7-15.5   | .56 / 14.2                 | 11.0±1.50 / 279±38  | 5.0±0.50 / 127±13  | 3400 / 15124                  | NO                                                                                                  | YES                                                                                                    | PL050-1                        |   |  |
| 35902             | 1300950147         | .62-.74 / 15.7-18.8   | .68 / 17.3                 | 11.0±1.50 / 279±38  | 6.0±0.50 / 152±13  | 4100 / 18238                  |                                                                                                     |                                                                                                        | PL062-1                        |   |  |
| 35903             | 1300950148         | .75-.99 / 19.1-25.1   | .87 / 22.1                 | 13.0±1.50 / 330±38  | 6.0±0.50 / 152±13  | 4100 / 18238                  |                                                                                                     |                                                                                                        | PL075-1                        |   |  |
| 35904             | 1300950149         | 1.00-1.24 / 25.4-31.5 | 1.12 / 28.4                | 14.0±1.50 / 356±.38 | 7.0±1.00 / 178±25  | 5800 / 25800                  |                                                                                                     |                                                                                                        | PL100-1                        |   |  |
| 35905             | 1300950150         | 1.25-1.49 / 31.8-37.8 | 1.37 / 34.8                | 15.0±2.00 / 381±51  | 7.0±1.00 / 178±25  | 5800 / 25800                  |                                                                                                     |                                                                                                        | PL125-1                        |   |  |
| 35906             | 1300950151         | 1.50-1.74 / 1.50-44.2 | 1.62 / 41.1                | 16.0±2.00 / 406±51  | 7.0±1.00 / 178±25  | 7500 / 33362                  |                                                                                                     |                                                                                                        | PL150-1                        |   |  |
| 35907             | 1300950152         | 1.75-1.99 / 44.5-50.5 | 1.87 / 47.5                | 18.0±2.00 / 457±51  | 8.0±1.00 / 203±25  | 10000 / 44482                 |                                                                                                     |                                                                                                        | PL175-1                        |   |  |
| 35908             | 1300950153         | 2.00-2.49 / 50.8-63.2 | 2.25 / 57.2                | 19.0±2.00 / 483±51  | 9.0±1.00 / 229±25  | 10000 / 44482                 |                                                                                                     |                                                                                                        | PL200-1                        |   |  |
| 35909             | 1300950154         | 2.50-2.99 / 63.5-75.9 | 2.75 / 69.9                | 19.0±2.00 / 483±51  | 10.0±1.00 / 254±25 | 13000 / 57827                 |                                                                                                     |                                                                                                        | PL250-1                        |   |  |

\*TO DETERMINE RECOMMENDED WORKING LOAD, DIVIDE BREAK STRENGTH BY 5.

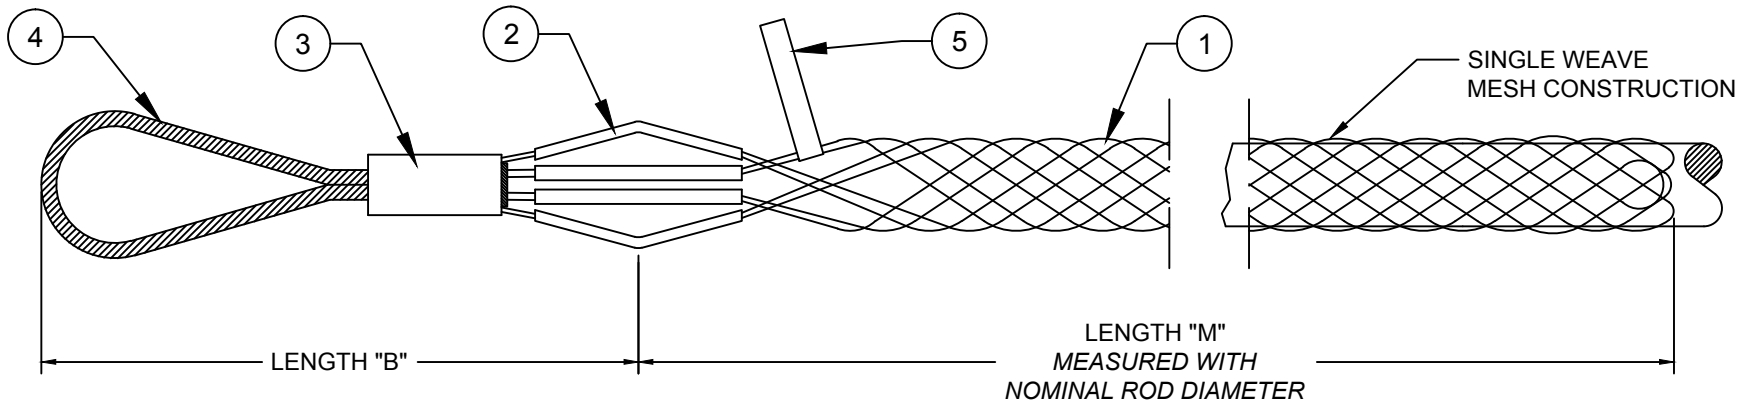

| ITEM | DESCRIPTION        | MATERIAL         | RELEASE SALES DRAWING     | QUALITY SYMBOLS | GENERAL TOLERANCES (UNLESS SPECIFIED)                | DIMENSION STYLE INCH/MM | SCALE NTS                                                                                                                     | DESIGN UNITS INCH                           | THIRD ANGLE PROJECTION |
|------|--------------------|------------------|---------------------------|-----------------|------------------------------------------------------|-------------------------|-------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|------------------------|
| 1    | WIRE MESH          | GALVANIZED STEEL | EC NO: IGC2014-1487       | ▽=0             | 4 PLACES ±---                                        | DRAWN BY DATE           | HRUIZ01 2014/05/13                                                                                                            | PULLING GRIPS<br>LIGHT DUTY<br>FLEXIBLE EYE |                        |
| 2    | SHOULDER PROTECTOR | ALUMINUM         | DRWN: HRUIZ01 2014/05/13  | ▽C=0            | 3 PLACES ±---                                        | CHECKED BY DATE         | HKNEELAN 2014/05/13                                                                                                           |                                             |                        |
| 3    | FERRULE            | ALUMINUM         | CHKD: HKNEELAN 2014/05/13 |                 | 2 PLACES ±.13                                        | APPROVED BY DATE        | JFMURPHY 2014/10/14                                                                                                           |                                             |                        |
| 4    | BALE WIRE          | GALVANIZED STEEL | APPR: JFMURPHY 2014/10/14 |                 | 1 PLACE ±.25                                         | MATERIAL NO.            | SEE TABLE                                                                                                                     |                                             |                        |
| 5    | LABEL              | MYLAR            |                           |                 | ANGULAR ±1/2°                                        | SIZE A                  | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | MOLEX INCORPORATED                          |                        |
|      |                    |                  |                           |                 | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS |                         |                                                                                                                               | SD-130095-101                               | SHEET NO. 1 OF 1       |