



HIRSCHMANN MOBILITY

**Cellular (2G/3G)/
GPS/ WLAN (2.4GHz)
Screw Antenna**

**GPS 2400 LP/CELL/Series
Part Number 602-430-XXX**

Features

- Low Profile antenna
- Mounting on several surfaces (e.g. plastics, metal ...)

Technical Data

Dimensions	124 mm x 80 mm x 21 mm
Weight	268 g
Housing materials	ASA-PC
Temperature range	-40°C - +80°C
Tightening torque	max. 5 Nm
Protection class	IP66 (acc. ISO 60529)
Cable type	RG 174

Technical Data

Cellular	
Frequency range	GSM 850: 824 - 894 MHz GSM 900: 880 - 960 MHz GSM 1800: 1710 - 1880 MHz GSM 1900: 1850 - 1990 MHz UMTS: 1920 - 2170 MHz
Impedance	50 Ohm
Return loss	> 10 dB
Decoupling	> 40 dB
Gain	0 dBi ²⁾
Diagnostic Resistor	10 kOhm
Load capacity	max. 10 W pulsed acc. GSM standard
GPS	
Frequency range	1.57542 GHz \pm 1.023 MHz (L1-band)
Impedance	50 Ohm
Current consumption	13 mA@ 5 V \pm 0.5 V (typ. 10 mA)
Gain	min. 2 dBic ¹⁾
Amplification	typ. 26 \pm 2 dB
Noise figure (50 Ohm)	typ. \leq 1.4 dB typ.
Voltage supply	2.7 V - 5.5 VDC (remotely fed)
WLAN	
Frequency range	Bluetooth: 2400 - 2484 MHz IEEE Std. 802.11b: 2412 - 2484 MHz
Impedance	50 Ohm
Load capacity	max. 1 W (acc. IEEE 802.11b)
Gain	0 dBi ²⁾
Diagnostic resistor	10 kOhms
Return loss	> 12 dB


¹⁾ dBic: referenced to an isotropic radiator, circular polarization

²⁾ dBi: referenced to an isotropic radiator




Versions

PN	Description	CELL	GPS	WLAN
602-430-001	GPS 2400 LP CELL/SMA/0.2	200 mm SMAM	170 mm SMAM	140 mm SMAM
602-430-007	GPS 2400 LP CELL/SMB/MCX/SMA/0.2	200 mm MCXm	170 mm SMBf	140 mm SMAM

Technical Drawing

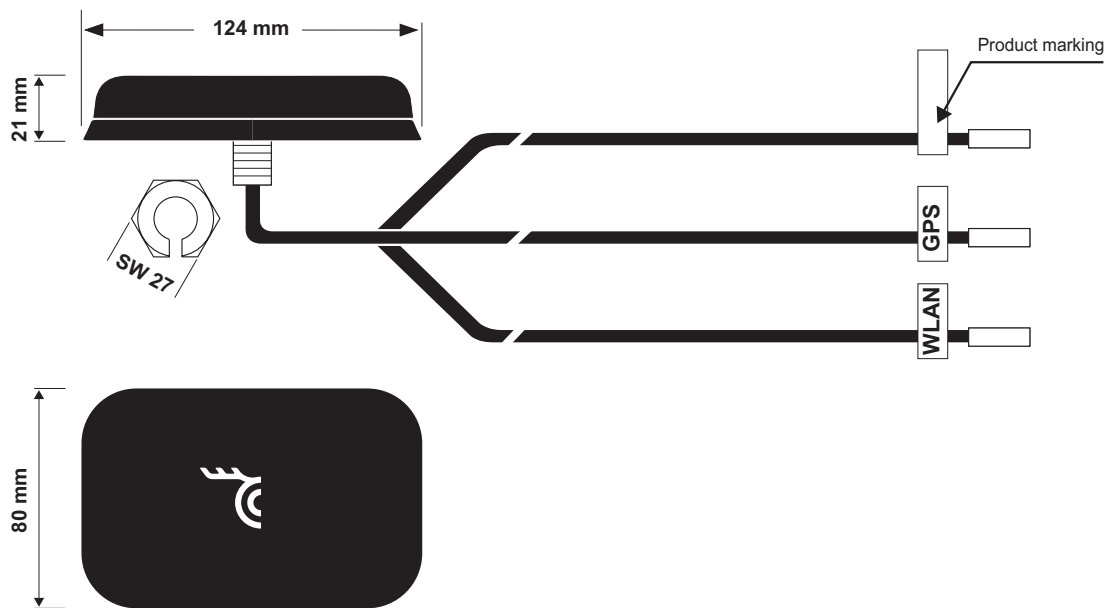

Installation

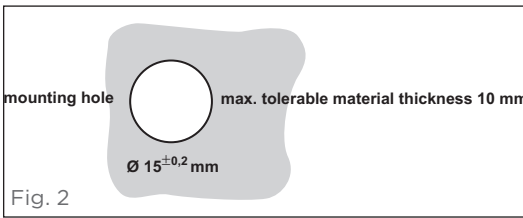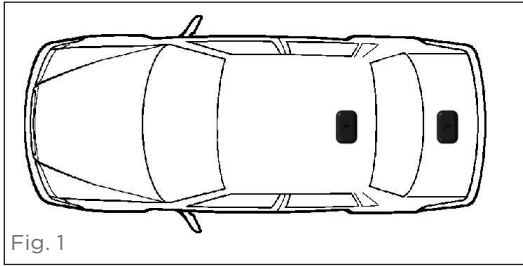

te.com/hirschmann-mobility

hirschmann-mobility@te.com

Hirschmann Car Communication GmbH,
a TE Connectivity Company
Stuttgarter Strasse 45-51
72654 Neckartenzlingen | Germany
Phone: +49 7127 14-0 | Fax: +49 7127 14-1428

TE, TE Connectivity, and TE connectivity (logo) are trademarks.
Hirschmann, GPS, UMTS, Bluetooth and FAKRA are trademarks.
Other products and/or company names might be trademarks of their respective owners.

DISCLAIMER While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information in this data sheet, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this data sheet are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

© 2020 TE Connectivity. All Rights Reserved. | Published 07-2020