


## CL03-15T High Voltage Diode



### FEATURES

- Low leakage, high surge capability
- High voltage, fast recovery rectifier
- $T_j: -40^\circ\text{C} \sim +150^\circ\text{C}$
- Polyimide passivation technology
- Epoxy resin molding, compact encapsulation
- ROHS compliant

DEVICE ELECTRICAL CHARACTERISTICS (25°C ambient temperature unless stated otherwise)	CONDITIONS	SYMBOL	CL03-15T
Repetitive Peak Reverse Voltage		$V_{RRM}$	15KV
Average Forward Current		$I_{AV}$	300mA
Non-Repetitive Peak Forward Current		$I_{FSM}$	20A
Allowable Junction Temperature		$T_j$	125°C
Storage Temperature Range		$T_{stg}$	-40~125°C
Maximum Forward Voltage Drop	$I_F=300\text{mA}, T_a=25^\circ\text{C}$	$V_F$	35.0V
Maximum Reverse Recovery Time	$I_F=10\text{mA}, I_R=20\text{mA}$	trr	100nS
Maximum Reverse Current	$V_R=V_{RRM}, T_a=25^\circ\text{C}$	$I_{R1}$	2.0μA

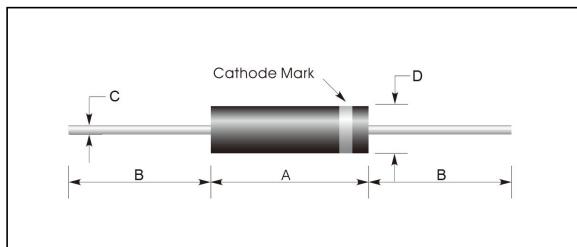

SYMBOL	CL03-15T (Unit : mm)
A	22.0
D	Φ7.5
B	22
C	Φ1.2