



THYRISTOR SURGE PROTECTOR AXIAL LEAD TYPE

DESCRIPTION



DO-15

MECHANICAL DIMENSION

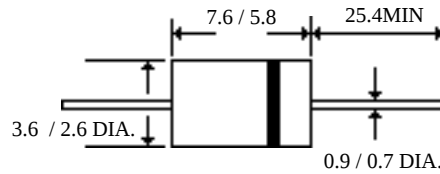

Dimension in MM

FEATURES

- ☐ UL94V-0 Flammability Classification
- ☐ ESD Protection >40k Voltage
- ☐ ,High Surge Current Capability
- ☐ Peak Off-State voltage from 58~300V
- ☐ Meet IEC100-4-4 & -5 Industry requirement
- ☐ Low Capacitance for T1/E1 Trunk and Line Card Application
- ☐ Provides Protection in Accordance with FCC part 68, UL1459, Bellcore 1089, ITU-TK. 20& K.21

Part No	CODE	Repetitive Peak Off Stage V _{drm} (V)	Switching Vol@100 V/uS V _s (V)	Minimum Holding Current dI/dt=1A/ms I _{pp} (mA)	Switching Current I _s (mA)	Urge Rating I _{pp} @ 10/1000us (A)	On-stage Current I _T (A)	Typical Capacitance @50V .@1MHz (pF)
TSP110AL	GF	90	130	150	800	50	1	60
TSP130AL	GG	120	160	150	800	50	1	40
TSP150AL	GH	140	180	150	800	50	1	40
TSP180AL	GI	160	220	150	800	50	1	40
TSP230AL	GJ	190	260	150	800	50	1	30
TSP260AL	GK	220	300	150	800	50	1	30
TSP310AL	GL	275	350	150	800	50	1	30
TSP350AL	GM	300	400	150	800	50	1	30
TSP110BL	GS	90	130	150	800	75	1	100
TSP130BL	GT	120	160	150	800	75	1	70
TSP150BL	GU	140	180	150	800	75	1	70
TSP180BL	GV	160	220	150	800	75	1	70
TSP230BL	GW	190	260	150	800	75	1	50
TSP260BL	GX	220	300	150	800	75	1	50
TSP310BL	GY	275	350	150	800	75	1	40
TSP350BL	GZ	300	400	150	800	75	1	40

● MAX OFF-STATE CURRENT @ V_{DRM}: 5uA; MAX ON-STATE VOL @ I_T:5V

THYRISTOR SURGE PROTECTOR **AXIAL LEAD TYPE**

Part No	CODE	Repetitive Peak Off Stage V _{drm} (V)	Switching Vol@100 V/uS V _s (V)	Minimum Holding Current dI/dt=1A/ms I _{pp} (mA)	Switching Current I _s (mA)	Urge Rating I _{pp} @ 10/1000us (A)	On-stage Current I _T (A)	Typical Capacitance @50V .@1MHz (pF)
TSP110CL	HF	90	130	150	800	100	1	100
TSP130CL	HG	120	160	150	800	100	1	70
TSP150CL	HH	140	180	150	800	100	1	70
TSP180CL	HI	160	220	150	800	100	1	70
TSP230CL	HJ	190	260	150	800	100	1	50
TSP260CL	HK	220	300	150	800	100	1	50
TSP310CL	HL	275	350	150	800	100	1	40
TSP350CL	HM	300	400	150	800	100	1	40

- MAX OFF-STATE CURRENT @ V_{DRM}: 5uA; MAX ON-STATE VOL @ I_T:5V

Fig.1 Pulse Wave Form Example

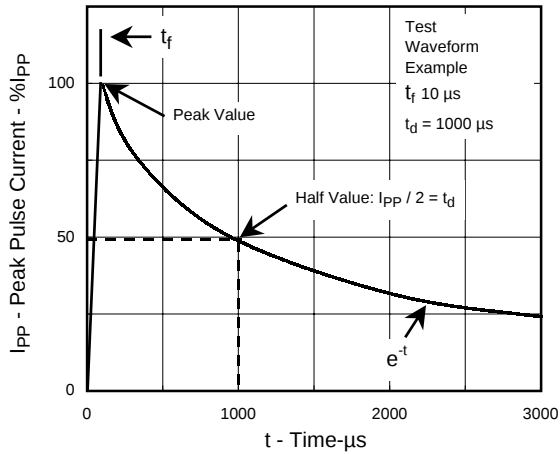


Fig.2 Typical Peak Off-State Current Vs Junction Temperature

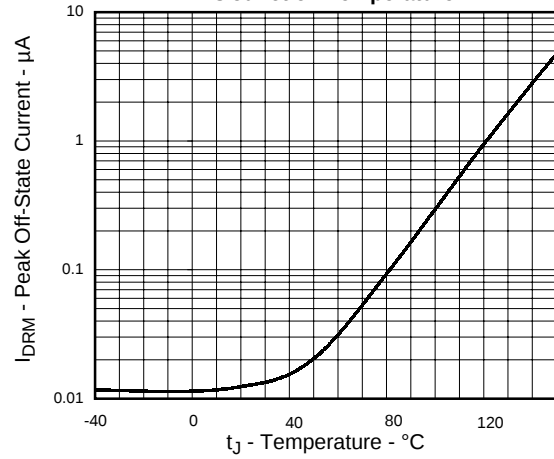


Fig.3 Typical On-State Current Vs On-State Voltage

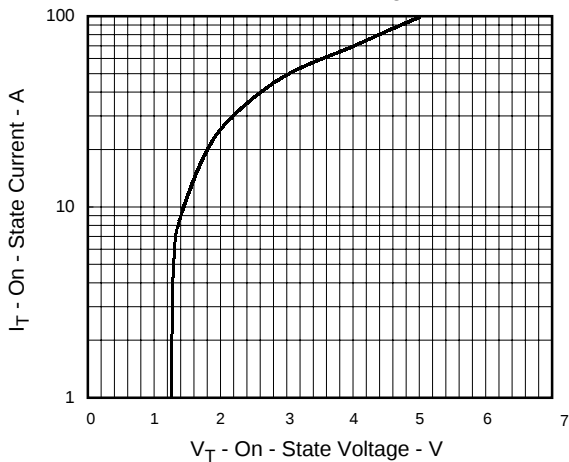


Fig.4 Typical Holding Current Vs Junction Temperature

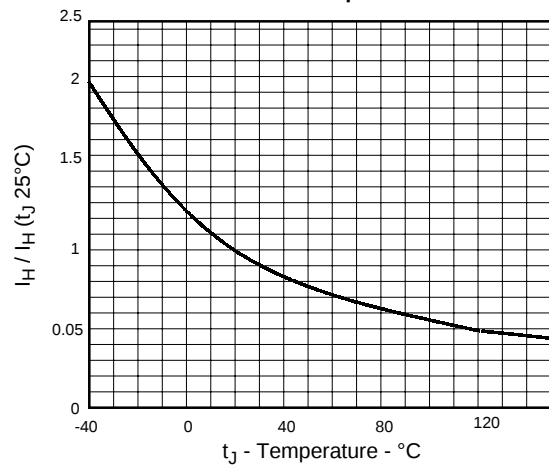


Fig.5 Typical normalized V_S Vs Junction Temperature

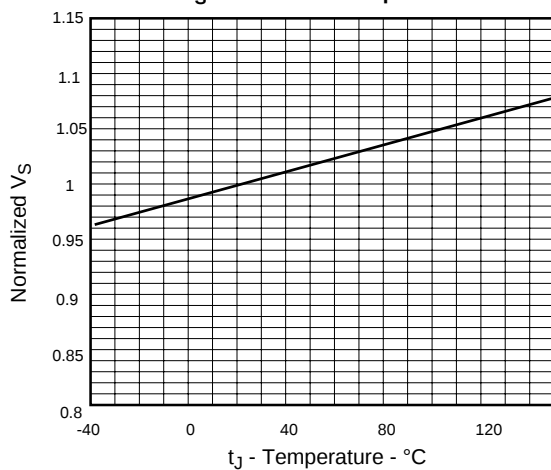


Fig.6 On-State Current Vs Surge Current Duration

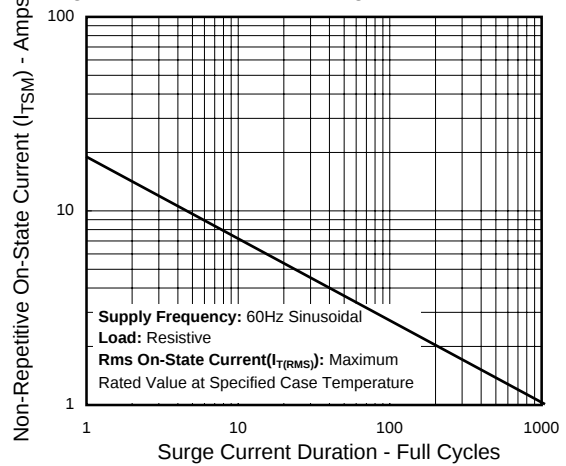


Fig.7 V - I Characteristics Curve

