

HSF RoHS **c** **UL** us **CE**

SPECIFICATIONS

Rated(额定参数): 300V,8A
 Dielectric strength(抗电强度): AC1500V/1 Minute
 Insulation Resistance(绝缘电阻):1000MΩ Min
 Contact Resistance(接触电阻):20mΩ Max
 Screw Torque(扭矩): 0.2Nm (1.7Lb.in)
 Wire Range(线径):16~28AWG
 Strip length(剥线长度):6~7mm
 Temp. range(操作温度): -40℃~+105℃
 MAX Soldering(瞬时温度):+260℃,5s

Housing Material(塑件): PA66 (UL94 V-0)
 Contact(端子): Phosphor Bronze, Tin plating(磷铜镀镍)
 Clamp(方块): Brass(黄铜), Ni plating(镀镍)
 Screw (螺丝): M2.0 Steel, Zinc plating(钢,镀锌)

| PITCH RANGE IN MM | | | NOMINAL DIMENSION RANGE IN MM | | | | |
|----------------------|-------|-------|----------------------------------|-------|-------|-------|-------|
| T0 | OVER | OVER | T0 | OVER | OVER | OVER | OVER |
| 6 | 6 | 10 | 30 | 30 | 60 | 100 | 150 |
| | T0 | T0 | T0 | T0 | T0 | T0 | T0 |
| | 10 | 24 | 30 | 60 | 100 | 150 | 150 |
| ±0.10 | ±0.15 | ±0.25 | ±0.30 | ±0.30 | ±0.50 | ±0.70 | ±1.00 |

Ordering Information






JL15EDGKA - XXX XX G X 1

Pitch
350=3.5PH
381=3.81PH

No.of pins
2P,3P,4P~24P

Housing Color
B=Black
G=Green
U=Blue
R=Red
W=White
Y=Yellow
O=Orange
E=Grey

Packing
O=Pe bag
T=Tube
A=Tray

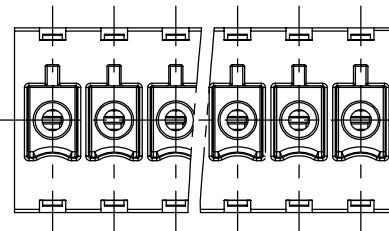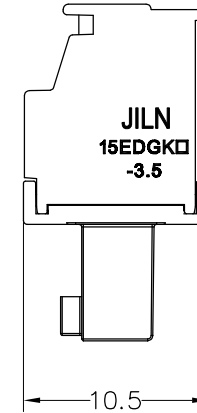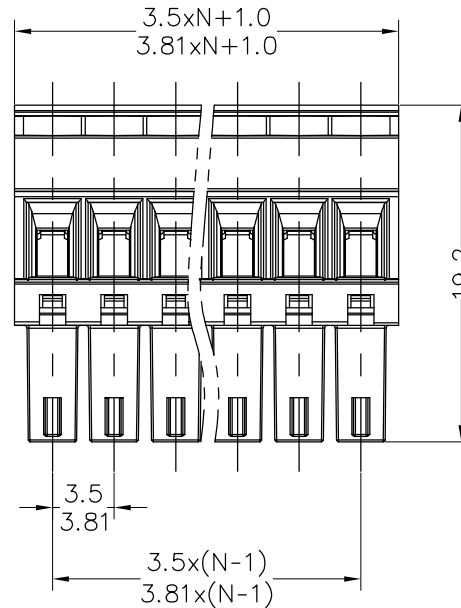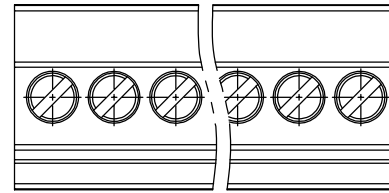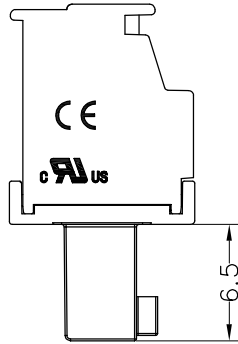

| | | | | | |
|-------------|---------|----------|----------|-------|-----|
| OPERATION | DRAW | iyusheng | 20.03.03 | SCALE | FIT |
| X.X ±0.30 | CHECK | | | UNIT | mm |
| X.XX ±0.20 | APPROVE | | | SIZE | A4 |
| X.XXX ±0.10 | | | | SHEET | 1/1 |
| Angle ±3° | | | | PROJ. | ☛ |
| DIM TOL | | | | | |

JILN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

| | | | | | | | |
|-----|------------|--------------------------|--------|--|--|----------|---|
| A0 | 2020.03.03 | NEW DRAWING | | | | PART NO. | JL15EDGKA-XXXXXGX1 |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | | | TITLE: | 3.5/3.81 Pitch Female Pluggable Terminal Blocks |