
isc N-Channel MOSFET Transistor IXTA140N055T2

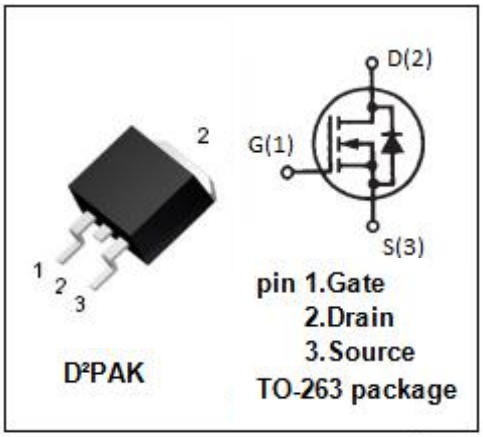

- **FEATURES**
- Static drain-source on-resistance:
  $R_{DS}(on) \leq 5.4m\Omega @ V_{GS}=10V$
- Fully characterized avalanche voltage and current
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation


- **APPLICATION**
- DC/DC Converters
- High Current Switching Applications

- **ABSOLUTE MAXIMUM RATINGS(T_a=25℃)**

SYMBOL	PARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage	55	V
V_{GS}	Gate-Source Voltage	±20	V
I_D	Drain Current-Continuous	140	A
I_{DM}	Drain Current-Single Pulsed	350	A
P_D	Total Dissipation @T_C=25℃	180	W
T_j	Operating Junction Temperature	-55~175	℃
T_{stg}	Storage Temperature	-55~175	℃

- **THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
$R_{th(j-c)}$	Junction-to-case thermal resistance	0.83	℃/W

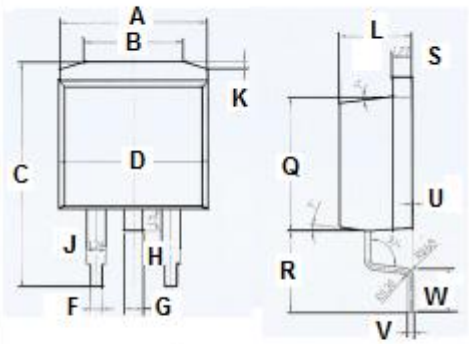

DIM	mm MIN	MAX
A	10	
B	6.6	6.8
C	15.23	15.25
D	10.15	10.17
F	0.76	0.78
G	1.26	1.28
H	1.4	1.6
J	1.33	1.35
K	0.4	0.6
L	4.6	4.8
Q	8.69	8.71
R	5.28	5.30
S	1.26	1.28
U	0.0	0.2
V	0.37	0.39
W	2.80	2.82

Download from alldatasheet.com

isc N-Channel MOSFET Transistor IXTA140N055T2

ELECTRICAL CHARACTERISTICS

T_C=25℃ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V; I_D = 250 μA	55		V
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS}; I_D = 250 μA	2.0	4.0	V
$R_{DS(on)}$	Drain-Source On-Resistance	V_{GS}=10V; I_D= 50A		5.4	mΩ
I_{GSS}	Gate-Source Leakage Current	V_{GS}= ±20V;V_{DS}=0V		±200	nA
I_{DSS}	Drain-Source Leakage Current	V_{DS}= V_{DSS}; V_{GS}= 0V		5	μA
		V_{DS}= V_{DSS}; V_{GS}= 0V;T_J= 150℃		150	
V_{SD}	Diode forward voltage	I_F= 70A; V_{GS} = 0V		1.3	V

NOTICE：

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.

Download from alldatasheet.com