
GR15-G ~ GR20-G

HIGH VOLTAGE FAST RECOVERY RECTIFIER

PRV : 1500 - 2000 Volts
Io : 0.5 Ampere

DO-215AC

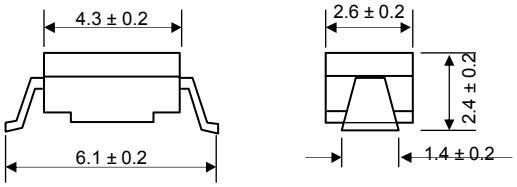

Dimensions in millimeters

FEATURES :

* Glass passivated chip
* High current capability
* High surge current capability
* High reliability
* Low reverse current
* Low forward voltage drop
* Fast switching for high efficiency
* Pb / RoHS Free

MECHANICAL DATA :

* Case : DO-215AC Molded plastic
* Epoxy : UL94V-O rate flame retardant
* Polarity : Color band denotes cathode end
* Mounting position : Any
* Weight : 0.060 gram (Approximately)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Rating at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

RATING	SYMBOL	GR15-G	GR20-G	UNIT
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	1500	2000	V
Maximum RMS Voltage	V_{RMS}	1050	1400	V
Maximum DC Blocking Voltage	V_{DC}	1500	2000	V
Maximum Average Forward Current	$I_{F(AV)}$	0.5		A
Maximum Peak Forward Surge Current, 8.3ms Single half sine wave superimposed on rated load (JEDEC Method)	I_{FSM}	20		A
Maximum Forward Voltage at I_F = 0.1 A	V_F	2.0	2.6	V
Maximum DC Reverse Current Ta = 25 °C	I_R	5.0		μA
at Rated DC Blocking Voltage Ta = 100 °C	$I_{R(H)}$	50		μA
Maximum Reverse Recovery Time (Note 1)	Trr	300	500	ns
Junction Temperature Range	T_J	- 65 to + 150		°C
Storage Temperature Range	T_{STG}	- 65 to + 150		°C

Note : (1) Reverse Recovery Test Conditions : I_F = 0.5 A, I_R = 1.0 A, Irr = 0.25 A.

RATING AND CHARACTERISTIC CURVES (GR15-G ~ GR20-G)

FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

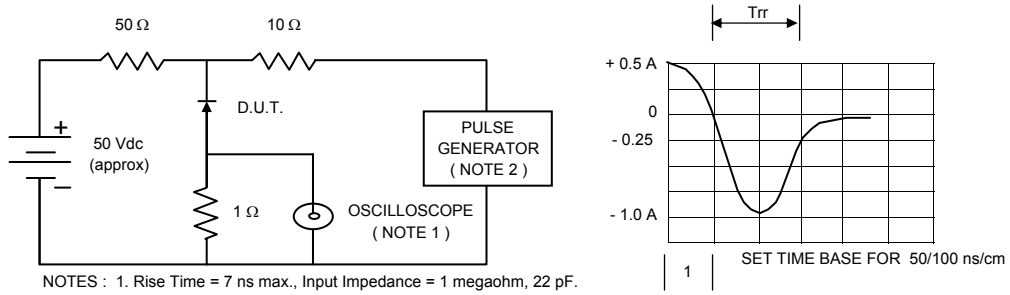

NOTES : 1. Rise Time = 7 ns max., Input Impedance = 1 megaohm, 22 pF.
2. Rise time = 10 ns max., Source Impedance = 50 ohms.
3. All Resistors = Non-inductive Types.

FIG.2 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

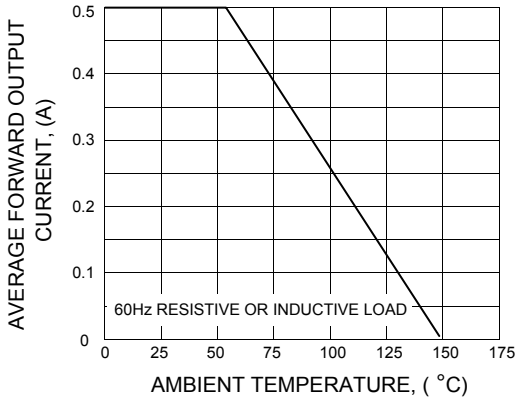


FIG.3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

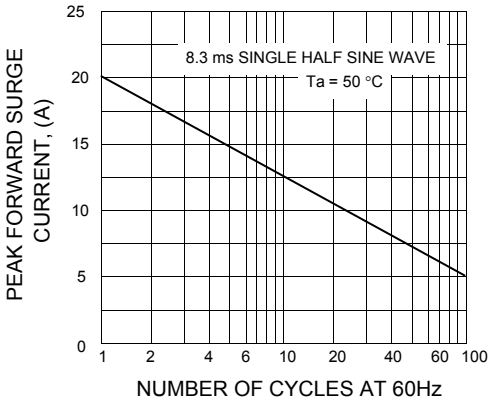


FIG.4 - TYPICAL FORWARD CHARACTERISTICS

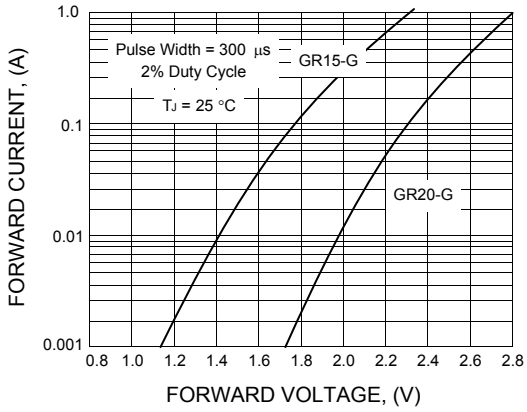


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

