
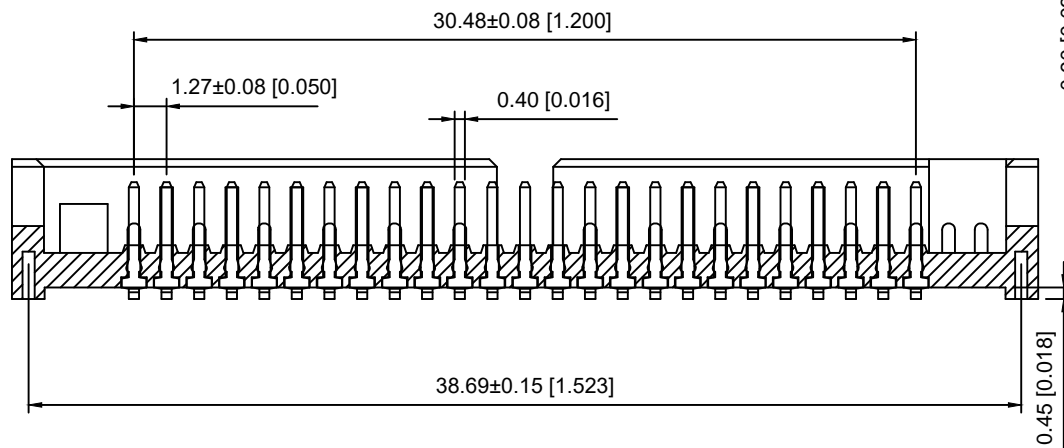


Voltage rating:250V AC/DC  
 额定电压:250V AC/DC  
 Current rating:1.0A  
 额定电流:1.0A  
 Insulation resistance:1000MΩ Min  
 绝缘电阻:1000MΩ Min  
 Withstanding voltage:≥500V AC/minute  
 耐压:≥500VC/分钟  
 Temperature range:-40℃--+250℃  
 使用温度:-40℃--+250℃



X1270 W V S -2xXX B1 - 9T AuSn  
 ① ② ③④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② Category:W-wafer
- ③ Welding Way:S-SMT
- ④ Welding Board Angle:V- Straight 180°
- ⑤ Row No.-Pin No.:2xXX-2x03P~2x32P
- ⑥ B1:Type B Contains gaps
- ⑦ Material:PA9T-Nylon PA9T UL94V-0
- ⑧ Planting Category:AuSn-Plating AuSn

						DSND	SCALE: N/A	MODEL TYPE: 1.27mm B
Δx					ANGLAR	DWN	VIEW:	PART NO.: X1270WVS-2xXXB1-9TAuSn
Δx					L ≤ 4	CHKD	UNIT: mm/in	DWG NO.: X-X1270WVS-2xXXB1-9TAuSn
Δx					4 < L ≤ 16	APPD	SIZE: A4	
MARK	DESCRIPTION	DATE	REVISED	APPROVED	16 < L ≤ 63			
					L > 63			
REVISIONS						UNSPECIFIED TOLERANCES		WEIGHT
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						XKB INDUSTRIAL PRECISION CO., LIMITED		SHEET
								1/1
								REVISION
								A0

