

SPECIFICATION FOR APPROVAL

CUSTOMER

CUSTOMER P/N

DESCRIPTION/SPEC

MWPY2512K Series

EDITION

SPEC.NO.:

DATE:

2020-3-12

MADE BY:

CUSTOMER APPROVE

CHECKED BY:**APPROVED BY:**

Please fax back after confirm of signature.

Note: Beyond the above specification also could satisfy the special requirement

Wire Wound SMD Power Inductors—MWPY2512 Series**Operating temperature range: -40°C~+125°C (Including self-heating)****1. PART NUMBERING SYSTEM**

MWPY	2512K	—	XXX	—	X	—	T
1	2		3		4		5

1. Series name
2. Product dimensions
3. Inductance Value
4. Inductance Tolerance (K:10% ; M:20% ; N:30%)
5. Packaging style (T: Taping; B: bulk)


2. FEATURES:

Magnetic-resin shielded construction reduces buzz noise to ultra-low levels
Metallization on ferrite core results in excellent shock resistance and damage-free durability
Closed magnetic circuit design reduces leakage flux and Electro Magnetic Interference (EMI)
30% higher current rating than conventional inductors of equal size
Takes up less PCB real estate and save more power

3. APPLICATIONS

LED Lighting Next-generation mobile devices with multifunction such as mobile TV and digital movie cameras Flat-screen TVs, blue-ray disc recorders, set top box Notebooks, desktop computers, servers, graphic cards Portable gaming devices, personal navigation systems, personal multimedia devices Automotive systems Telecomm base stations

Note: Beyond the above specification also could satisfy the special requirement

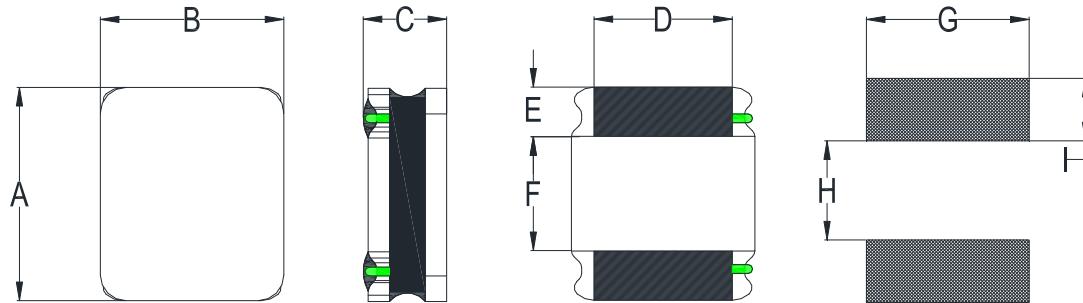4. Appearance shape (unit : mm)**5. Appearance size(unit : mm) Tolerance:**

A	B	C	D	E	F	G	H	I
2.5± 0.2	2.0 ± 0.2	1.25Max	1.5±0.2	0.8±0.2	0.8±0.2	2.0Ref	0.8 Ref	0.85 Ref

6. Test instruments

L: TH2826A LCR METER (or equivalent)

Isat: CH2815 LCR METER+VR7220 DC SUPPLIER (or equivalent)

DCR: HK502BC MILLIOHMMETER (or equivalent)

Note: Beyond the above specification also could satisfy the special requirement

7. CHARACTERISTICS

Part Number	Inductance	DC Resistance		Saturation Current		Heat Rating Current	
		1MHz/1V	Max.	Typ.	Max.	Typ.	Max.
Units	uH	Ω	Ω	A	A	A	A
Symbol	L	DCR		Isat		Irms	
MWPY2512K-R24M-T	0.24±20%	0.023	0.019	4.10	4.80	4.10	4.50
MWPY2512K-R33M-T	0.33±20%	0.031	0.026	4.00	4.70	3.35	3.70
MWPY2512K-R47M-T	0.47±20%	0.036	0.031	3.80	4.50	3.00	3.30
MWPY2512K-R68M-T	0.68±20%	0.047	0.038	3.00	3.30	2.30	2.50
MWPY2512K-1R0M-T	1.0±20%	0.060	0.050	2.25	2.50	2.30	2.60
MWPY2512K-1R2M-T	1.2±20%	0.078	0.065	2.20	2.50	2.00	2.20
MWPY2512K-1R5M-T	1.5±20%	0.090	0.075	2.00	2.35	1.80	2.00
MWPY2512K-1R8M-T	1.8±20%	0.108	0.093	1.95	2.20	1.75	1.90
MWPY2512K-2R2M-T	2.2±20%	0.108	0.093	1.75	1.90	1.75	1.90
MWPY2512K-2R7M-T	2.7±20%	0.156	0.130	1.30	1.60	1.40	1.50
MWPY2512K-3R3M-T	3.3±20%	0.156	0.130	1.20	1.35	1.40	1.50
MWPY2512K-4R7M-T	4.7±20%	0.228	0.190	1.10	1.20	1.10	1.20
MWPY2512K-5R6M-T	5.6±20%	0.330	0.255	1.00	1.10	1.00	1.15
MWPY2512K-6R8M-T	6.8±20%	0.360	0.300	0.90	1.10	0.95	1.05
MWPY2512K-100M-T	10±20%	0.522	0.435	0.70	0.85	0.78	0.86
MWPY2512K-150M-T	15±20%	1.000	0.700	0.60	0.70	0.50	0.60
MWPY2512K-220M-T	22±20%	1.290	1.000	0.45	0.55	0.48	0.55

※1: All test data is referenced to 20° C ambient;

※2: Rated current: Isat or Irms, whichever is smaller;


※3: Isat: DC current at which the inductance drops approximate30%Typ from its value without current;

※4: Irms: DC current that causes the temperature rise ($\Delta T = 40^{\circ} C$) from 20° C ambient.

Note: Beyond the above specification also could satisfy the special requirement

8.DIMENSIONS FOR CARRIER TAPES:

ITEM	W	A0	B0	K0	K1	P	F	E	D0	D1	P0	P2	T
DIM	8.00	2.35	2.65	1.4	0.00	4.00	3.50	1.75	1.50	0.00	4.00	2.00	0.25
	+0.3	+0.10	+0.10	+0.10	+0.0	+0.1	+0.05	+0.1	+0.1	+0.0	+0.1	+0.05	+0.05
	-0.3	-0.10	-0.10	-0.10	-0.0	-0.1	-0.05	-0.1	-0.1	-0.0	-0.1	-0.05	-0.05

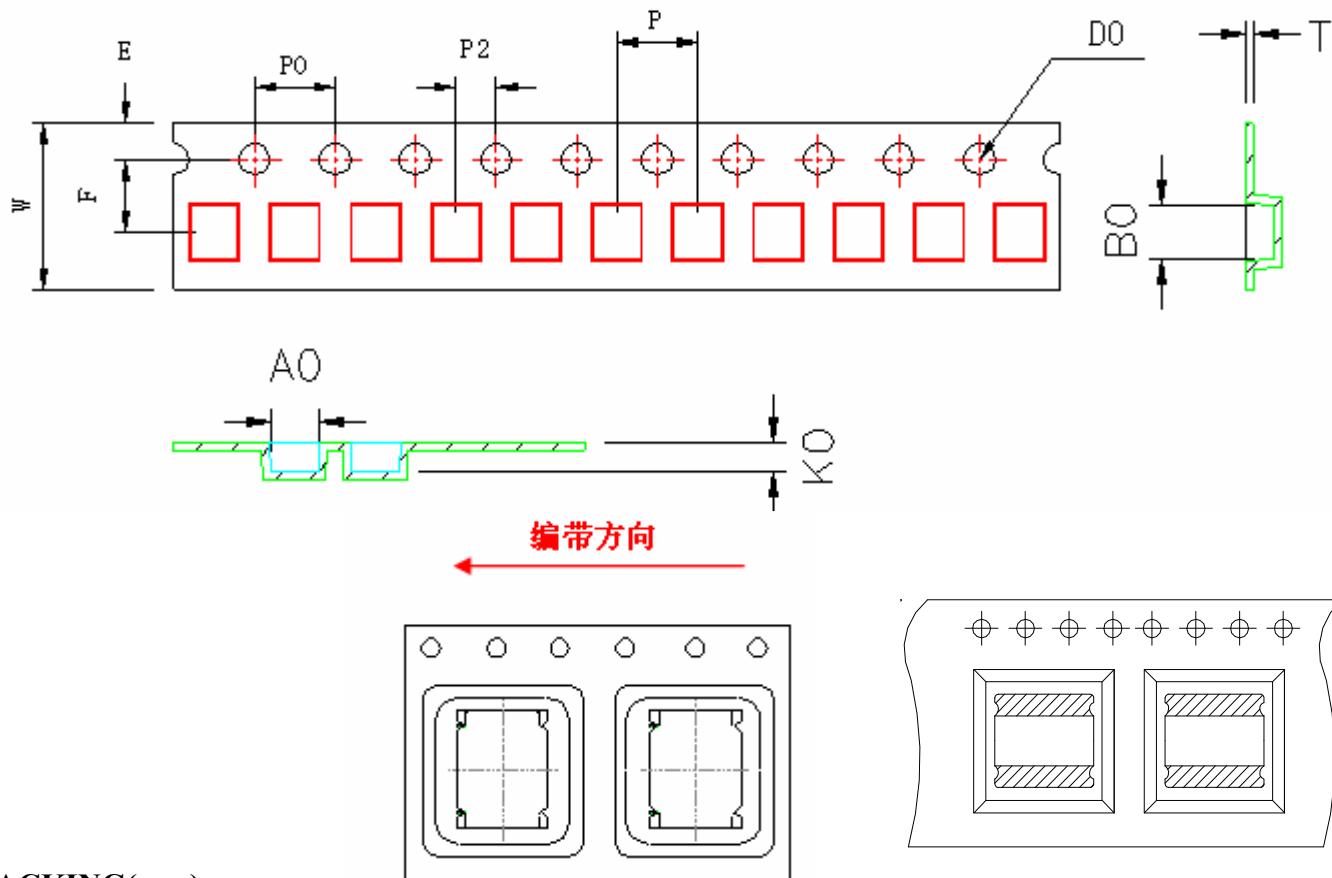

9.PACKING(mm)

载带宽度 (W)	间距 (P)	卷(PCS) 7inch
8mm	4mm	2000

备注:

- 1.内箱规格: 190*190*67mm (REF.) .
- 2.外箱规格: 365*365*150mm (REF.) .

Note: Beyond the above specification also could satisfy the special requirement