


POW-R-BLOK™

Dual & Single Diode Isolated Module
160 Amperes / Up to 1600 Volts

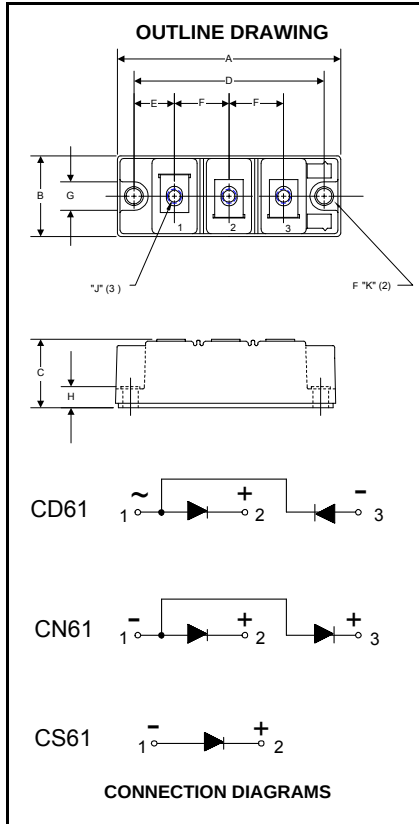

Outline Dimensions

Dimension	Inches	Millimeters
A	3.70	94
B	1.38	35
C	1.18	30
D	3.15	80
E	0.67	17
F	0.91	23
G	0.57	14.5
H	0.35	9
J	M6	M6
K	0.26	6.5

Note: Dimensions are for reference only.



CD61 16A, CS61 16A
CN61 16A, CC61 16A
Dual & Single Diode Isolated
POW-R-BLOK™ Module
160 Amperes / Up to 1600 Volts

Ordering Information:

Select the complete nine digit module part number from the table below.
Example: CD611616A is a 1600 Volt, 160 Ampere Dual Diode Isolated POW-R-BLOK™ Module

Type	Voltage Volts (x100)	Current Amperes (x10)
CD61	08	16
CN61	12	
CC61	14	
CS61	16	

Description:

Powerex Dual Diode & Single Diode Modules are designed for use in applications requiring rectification and isolated packaging. The modules are isolated for easy mounting with other components on a common heatsink. POW-R-BLOK™ has been tested and recognized by the Underwriters Laboratories.

Features:

- Electrically Isolated Heatsinking
- DBC Alumina Insulator
- Glass Passivated Chips
- Metal Baseplate
- Low Thermal Impedance for Improved Current Capability
- UL Recognized (E78240)

Benefits:

- No Additional Insulation Components Required
- Easy Installation
- No Clamping Components Required
- Reduce Engineering Time

Applications:

- Power Supplies
- Bridge Circuits
- AC & DC Motor Drives
- Battery Supplies
- Large IGBT Circuit Front Ends
- Welders



CD61 16A, CS61 16A
CN61 16A, CC61 16A

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

POW-R-BLOK™
Dual & Single Diode Isolated Module
160 Amperes / Up to 1600 Volts

Absolute Maximum Ratings

Characteristics	Conditions	Symbol	Units
Repetitive Peak Reverse Blocking Voltage		V_{RRM}	up to 1600 V
Non-Repetitive Peak Reverse Blocking Voltage ($t < 5$ msec)		V_{RSM}	$V_{RRM} + 100$ V
RMS Forward Current	180° Conduction, $T_C=100^{\circ}\text{C}$	$I_{F(RMS)}$	260 A
Average Forward Current	180° Conduction, $T_C=100^{\circ}\text{C}$	$I_{F(AV)}$	165 A
Peak One Cycle Surge Current, Non-Repetitive	60 Hz, 100% V_{RRM} reapplied, $T_J=150^{\circ}\text{C}$	I_{FSM}	3,500 A
	60 Hz, 100% No V_{RRM} reapplied, $T_J=150^{\circ}\text{C}$	I_{FSM}	4,200 A
	50 Hz, 100% V_{RRM} reapplied, $T_J=150^{\circ}\text{C}$	I_{FSM}	3,350 A
	50 Hz, 100% No V_{RRM} reapplied, $T_J=150^{\circ}\text{C}$	I_{FSM}	4,000 A
Peak Three Cycle Surge Current, Non-Repetitive	60 Hz, 100% V_{RRM} reapplied, $T_J=150^{\circ}\text{C}$	I_{FSM}	2,600 A
	50 Hz, 100% V_{RRM} reapplied, $T_J=150^{\circ}\text{C}$	I_{FSM}	2,480 A
Peak Ten Cycle Surge Current, Non-Repetitive	60 Hz, 100% V_{RRM} reapplied, $T_J=150^{\circ}\text{C}$	I_{FSM}	1,750 A
	50 Hz, 100% V_{RRM} reapplied, $T_J=150^{\circ}\text{C}$	I_{FSM}	1,820 A
I^2t for Fusing for One Cycle	8.3ms, 100% V_{RRM} reapplied, $T_J=150^{\circ}\text{C}$	I^2t	52,000 $\text{A}^2 \text{ sec}$
	8.3ms, 100% No V_{RRM} reapplied, $T_J=150^{\circ}\text{C}$	I^2t	73,000 $\text{A}^2 \text{ sec}$
	10ms, 100% V_{RRM} reapplied, $T_J=150^{\circ}\text{C}$	I^2t	56,000 $\text{A}^2 \text{ sec}$
	10ms, 100% No V_{RRM} reapplied, $T_J=150^{\circ}\text{C}$	I^2t	80,000 $\text{A}^2 \text{ sec}$
Operating Temperature		T_J	-40 to +150 $^{\circ}\text{C}$
Storage Temperature		T_{stg}	-40 to +150 $^{\circ}\text{C}$
Max. Mounting Torque, M6 Mounting Screw			35 - 50 in.-Lb.
			4 - 6 Nm
Max. Mounting Torque, M8 Terminal Screw			35 - 50 in.-Lb.
			4 - 6 Nm
Module Weight, Typical			200 g
			7.1 lb.
V Isolation @ 25C, V_{rms} for 1 sec		V_{rms}	3500 V


Electrical Characteristics, T_J=25°C unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Max.	Units
Repetitive Peak Reverse Leakage Current	I _{RRM}	Up to 1600V, T _J =150°C		20	mA
Peak On-State Voltage	V _{FM}	I _{FM} =520A, 180 Deg Conduction		1.43	V
Threshold Voltage, Low-level	V _{(TO)1}	T _J = 150°C, I = 16.7% I _{F(AV)} to I _{F(AV)}		0.73	V
Slope Resistance, Low-level	r _{T1}			1.5	mΩ
Threshold Voltage, High-level	V _{(TO)2}	T _J = 150°C, I = I _{F(AV)} to I _{FSM}		0.88	V
Slope Resistance, High-level	r _{T2}			1.26	mΩ
V _{TM} Coefficients, Full Range		T _J = 150°C, I = 15% I _{F(AV)} to I _{FSM}	A =	0.563	
			B =	0.0392	
		V _{FM} = A + B Ln I + C I + D Sqrt I	C =	1.31 E-3	
			D =	-8.25 E-5	


Thermal Characteristics

Characteristics	Symbol		Max.	Units
Thermal Resistance, Junction to Case	R _{ΘJ-C}	Per Module, both conducting Per Junction both conducting	0.1 0.2	°C/W °C/W
Thermal Impedance Coefficients	Z _{ΘJ-C}	Z _{ΘJ-C} = K ₁ (1-exp(-t/τ ₁)) + K ₂ (1-exp(-t/τ ₂)) + K ₃ (1-exp(-t/τ ₃)) + K ₄ (1-exp(-t/τ ₄))	K ₁ = 1.84E-2 K ₂ = 4.68E-2 K ₃ = 8.25E-2 K ₄ = 5.23E-2	τ ₁ = 2.53E-6 τ ₂ = 6.44E-2 τ ₃ = 3.11E-1 τ ₄ = 1.32
Thermal Resistance, Case to Sink Lubricated	R _{ΘC-S}	Per Module	0.05	°C/W


Maximum On-State Forward Voltage Drop
 (T_J = 150 °C)

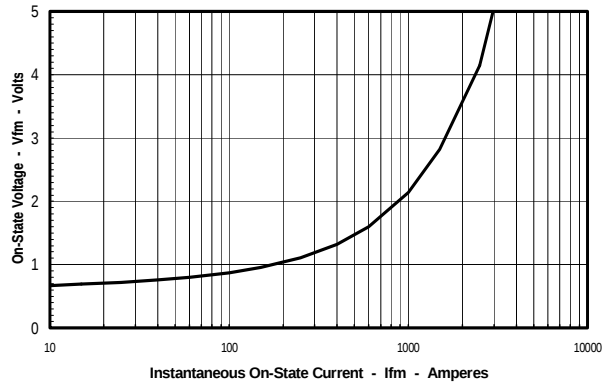


Maximum Transient Thermal Impedance
 (Junction to Case, Per Diode)

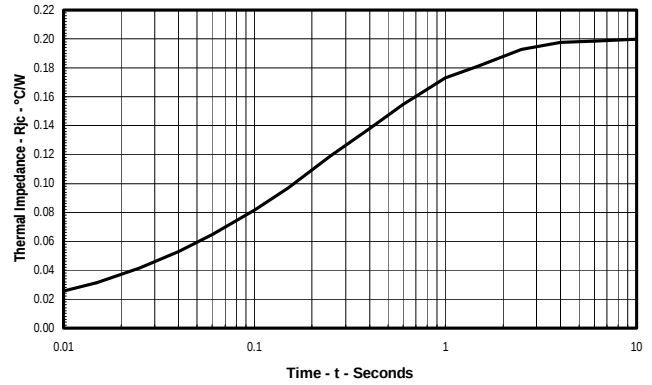


Maximum On-State Power Dissipation
 (Sinusoidal Waveform)

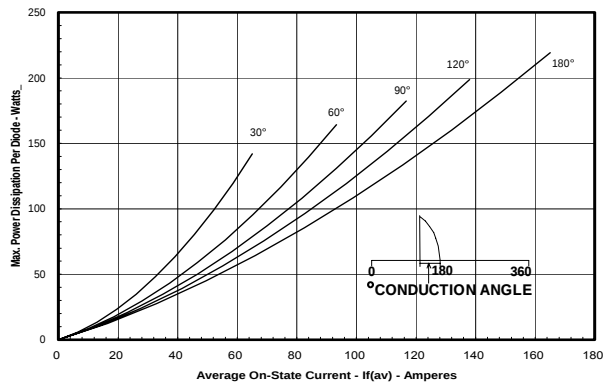


Maximum Allowable Case Temperature
 (Sinusoidal Waveform)

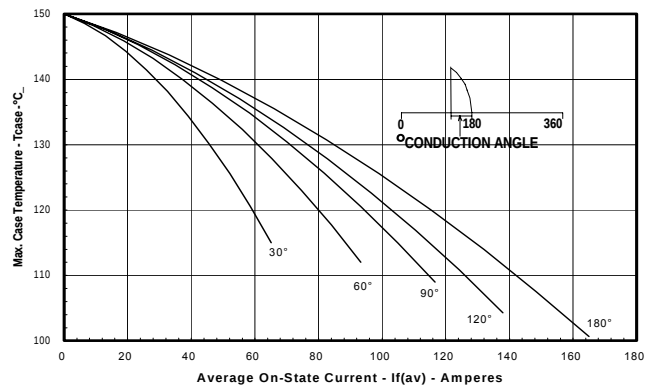

Maximum On-State Power Dissipation
 (Rectangular Waveform)

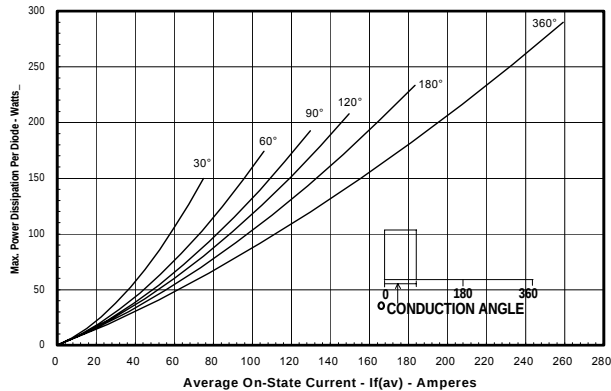

Maximum Allowable Case Temperature
 (Rectangular Waveform)


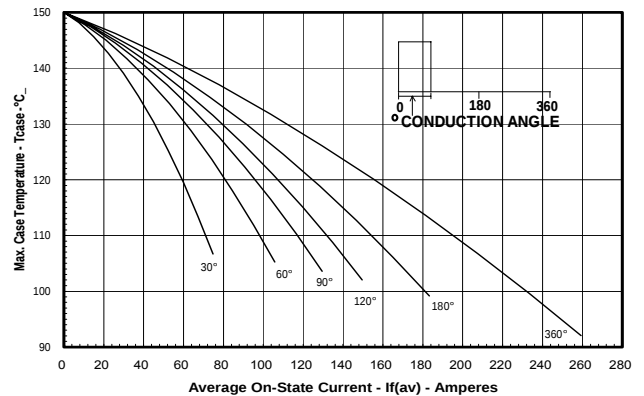




**CD61 16A, CS61 16A
CN61 16A, CC61 16A**

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

POW-R-BLOK™
Dual & Single Diode Isolated Module
160 Amperes / Up to 1600 Volts

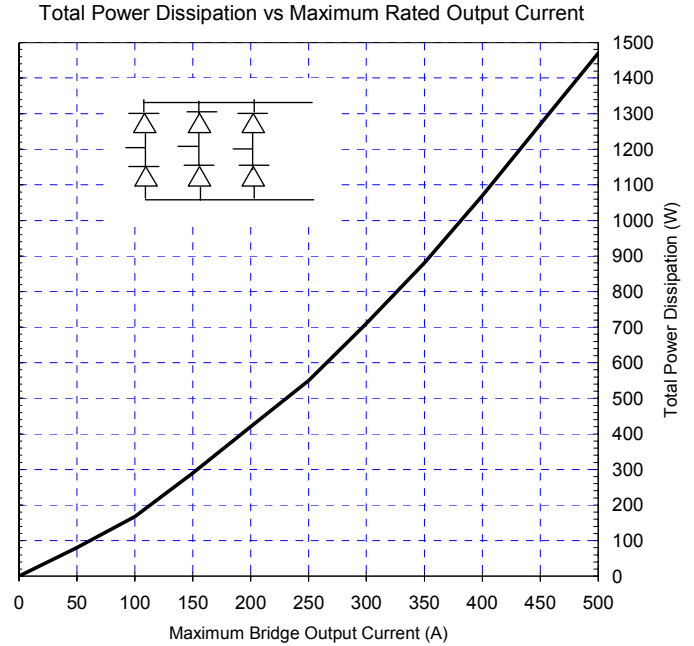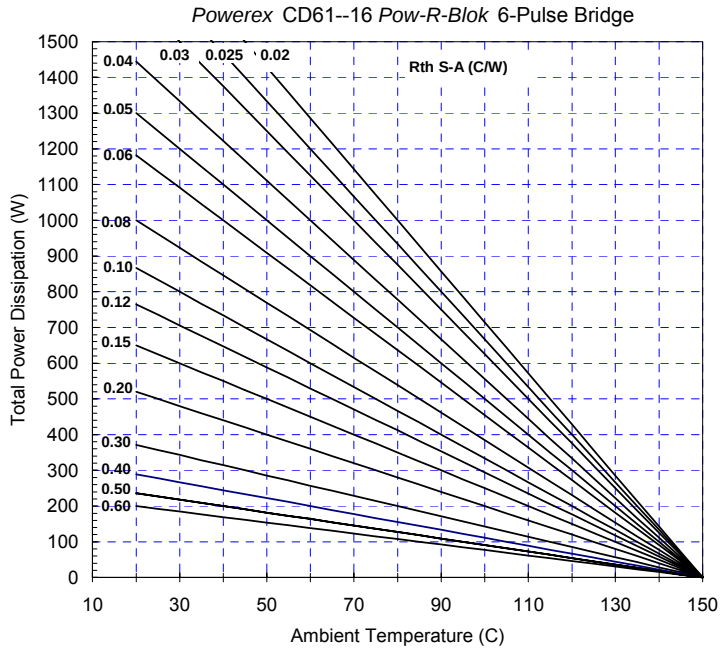

Six-Pulse Bridge Circuit Total Power Dissipation & Maximum Rated Output Current With Sink to Ambient Resistance of Heatsink as a Parameter.