

FERA10D

Ultra fast Plastic Power Rectifiers

VOLTAGE: 200V

CURRENT:10.0A



FEATURE

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- Ideally suited for use in very high frequency switching power supplies, inverters and as free wheeling diodes
- Ultra fast recovery time for high efficiency
- Excellent high temperature switching
- Glass passivated junction
- High voltage and high reliability
- High speed switching
- Low forward voltage

MECHANICAL DATA


Case: JEDEC TO-220 molded plastic body over passivated chip

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

TO-220AB

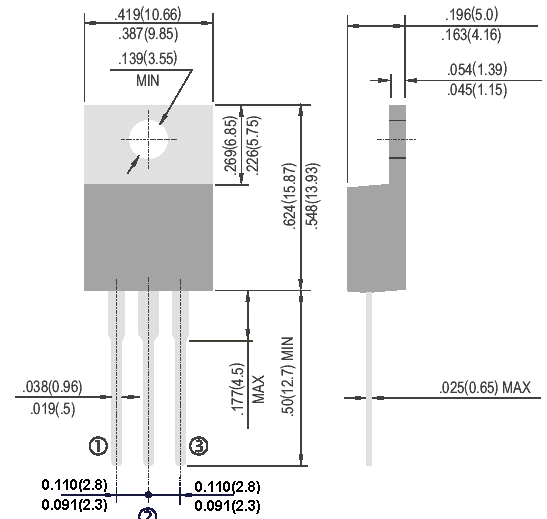

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

	SYMBOL	FERA10D	units
Maximum Recurrent Peak Reverse Voltage	Vrrm	200	V
Maximum RMS Voltage	Vrms	140	V
Maximum DC blocking Voltage	Vdc	200	V
Maximum Average Forward Rectified at Tc =100°C	If(av)	10.0	A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	Ifsm	100	A
Maximum Forward Voltage at Forward Current 5A and 25°C	Vf	1.0	V
Maximum Reverse Recovery Time (Note 1)	Trr	50	nS
Typical thermal resistance junction to case	R θ jc	5.0	°C/W
Maximum DC Reverse Current Ta =25°C at rated DC blocking voltage Ta =125°C	Ir	10 100	μA μA
Storage and Operating Temperature Range	Tstg, Tj	-55 to +150	°C

Note:

1. Reverse Recovery Condition If =0.5A, Ir =1.0A, Irr =0.25A

RATINGS AND CHARACTERISTIC CURVES FERA10D

FIG. 1 - FORWARD CURRENT DERATING CURVE

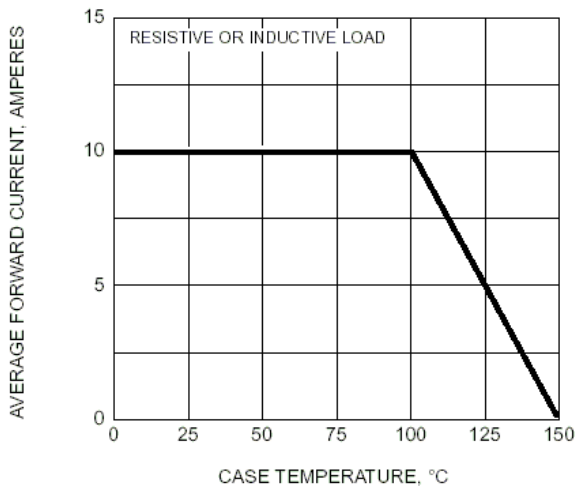


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

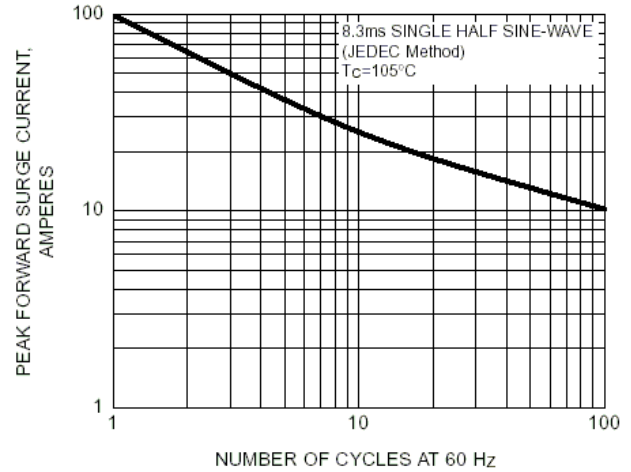


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

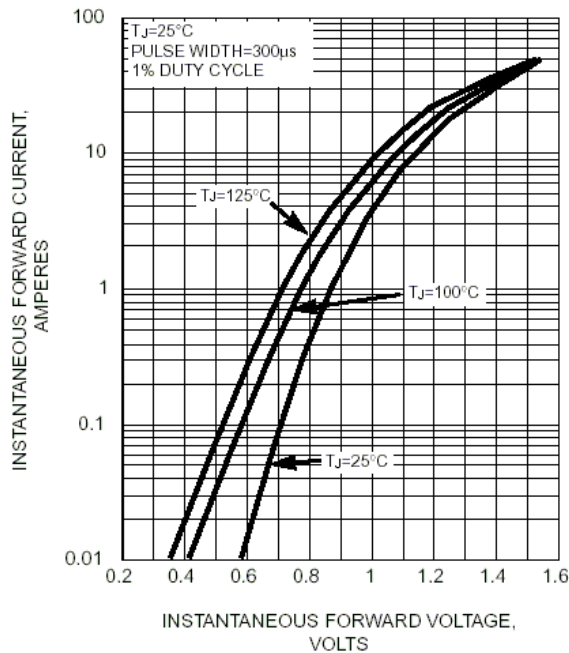


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS PER LEG

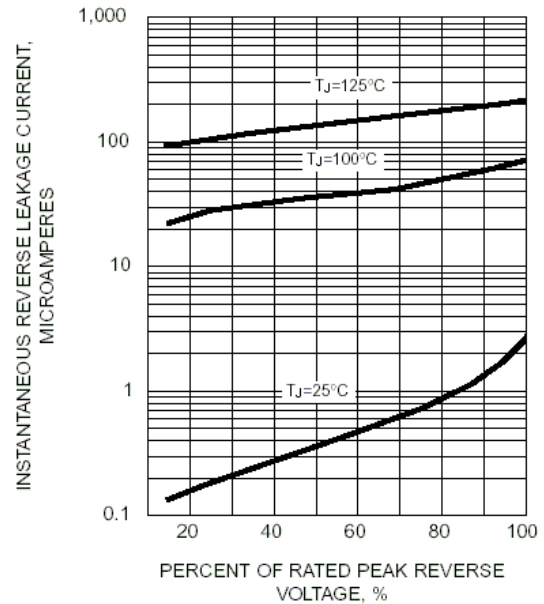


FIG. 5 - REVERSE SWITCHING CHARACTERISTICS PER LEG

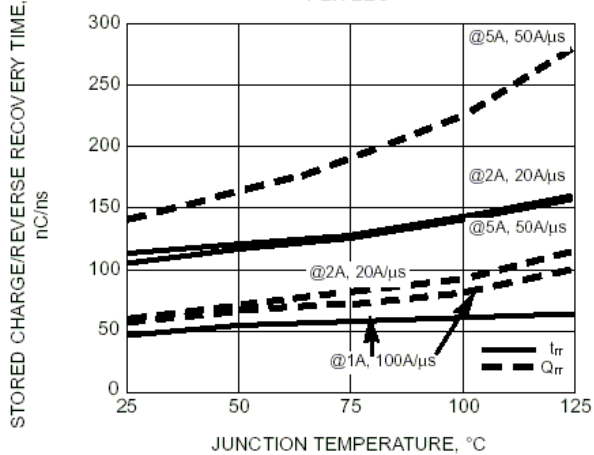


FIG. 6 - TYPICAL JUNCTION CAPACITANCE PER LEG

