






Specifications:

规格:  
 Voltage rating:250V AC/DC  
 额定电压: 250V AC/DC  
 Current rating:3A AC/DC  
 额定电流: 3A AC/DC  
 Withstanding voltage:800V AC/minute  
 耐受电压: 800V AC/分钟  
 Temperature range:-25℃-+85℃  
 温度范围: -25℃-+85℃  
 Insulation resistance:≥1000MΩ  
 绝缘电阻: ≥1000MΩ  
 Contact resistance:≤10mΩ  
 接触电阻: ≤10mΩ  
 After environmental testing:≤20mΩ  
 环境测试后: ≤20兆欧

X2026 T - PS N-A

① ② ③ ④

- 1.Series Number
- 2.Category:T-terminal
- 3.Material:P-Phosphor bronze
- 4.Plating style:SN-Bright tin plating

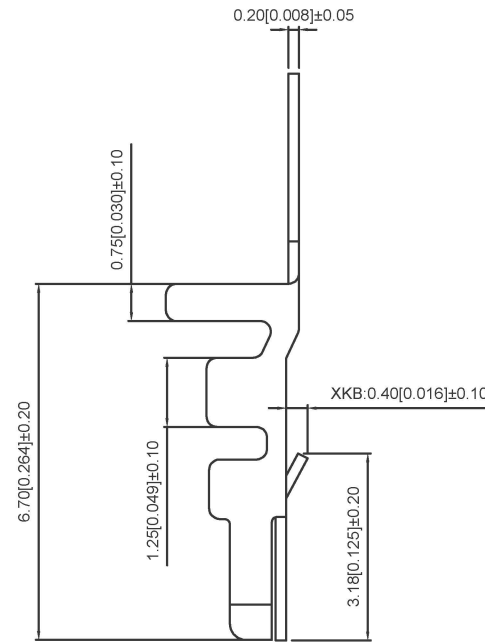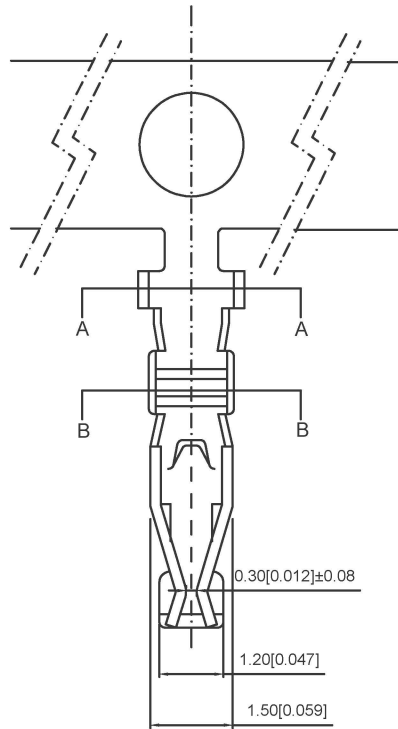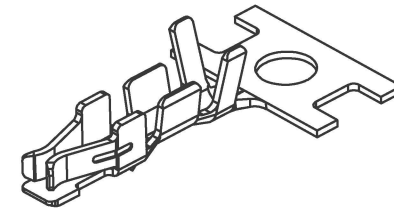

Section:B-B

X2026T-PSN-A	Phosphor Bronze	AWG#22-28	1.50mm(Max)	Stamping Before Plating:30u"MIN.Ni;70u"MIN.SN	X2026H
PART NO	Material	Wire Range	Insulation OD	Finish	Used In Cjst Housing

广东星坤科技股份有限公司

生	日期
效	
效	
效	
MARK	文件工程章

units:	mm
tolerance:	
X.X	±0.2mm
X.XX	±0.1mm
X.XXX	±0.05mm
UNSPECIFIED TOLERANCES	

DSND		DATE		SCALE: N/A	MODEL TYPE: Wire to board connector	
DWN		DATE		VIEW:	PART NO.:	
CHKD		DATE		UNIT: mm/in	2.00mm Crimp Style Connectors	
APPD		DATE		SIZE: A4	DWG NO.: X2026T-PSN-A	
XKB INDUSTRIAL PRECISION CO., LIMITED				WEIGHT	SHEET	REVISION
				1.0g	1/1	A0