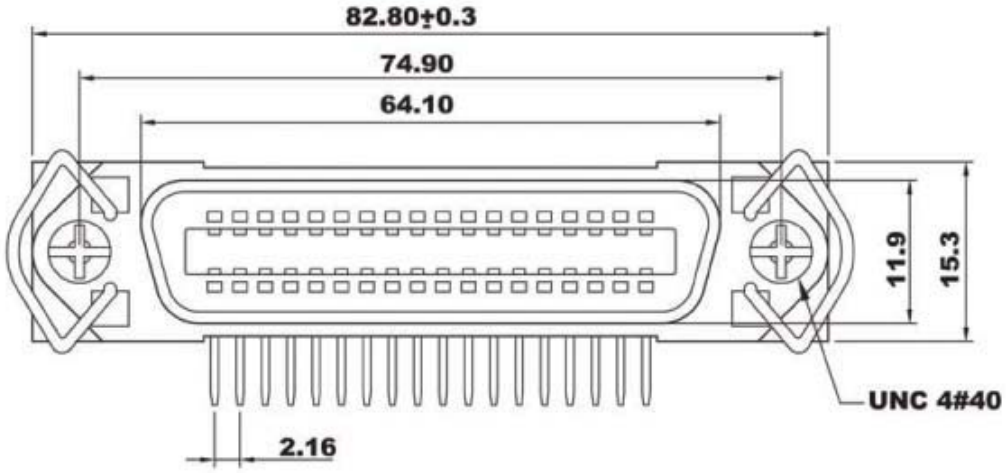

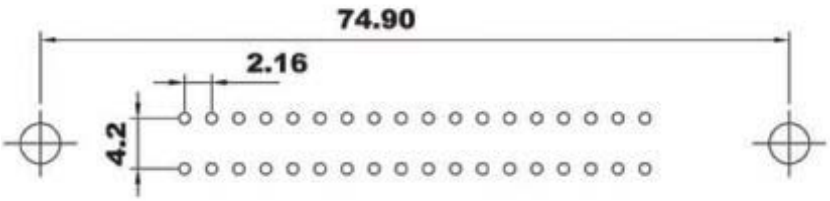

Recommended P.C.B Layout (Top View)
Tolerance: ±0.10mm

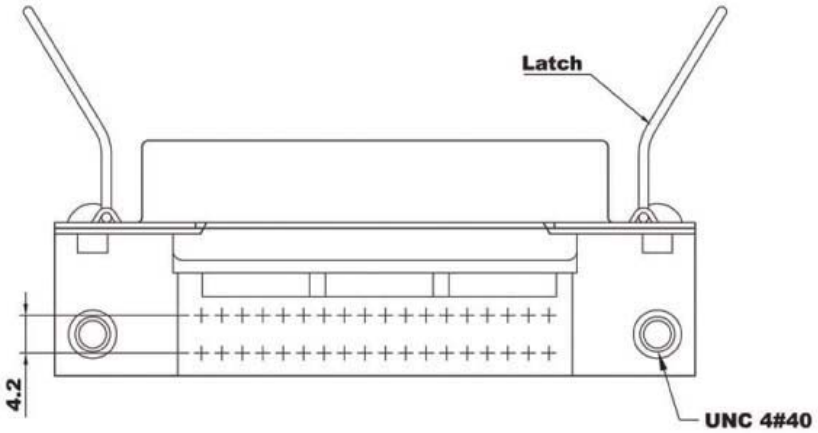



Material:
- Insulator Material: PBT, Rated UL94V-0
- Contact: Copper Alloy
  Shell: Steel
  Rivet, Broadlock: Brass

Contact Plating:
- Underplate: 50µ" Nickel
- Contact Area: 1µ" Selective Gold
- Solder Tails Area: 100µ" Tin/Lead

Shell Plating:
- Nickel over Copper Alloy

Mechanical:
- Operating Temperature: -55°C to +105°C

RoHS Complaint

Scale	1:1							Name
TOLERANCE						Drawn	11.22.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

ASSMANN WSW components

Item No.
A-57/xx-FR/KL-R

Title Centronics-Connectors, Female, Angled for PCB Mounting

Drawing No.

rev00

Replace

Sheet