Elektronische Bauelemente

SBL20U120F

Voltage 120V 20.0 Amp

Low VF Trench MOS Barrier Schottky Rectifier


RoHS Compliant Product

A suffix of "-C" specifies halogen free

ITO-220

FEATURES


- Trench MOS Schottky technology
- Low forward voltage drop
- Low reverse current
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction

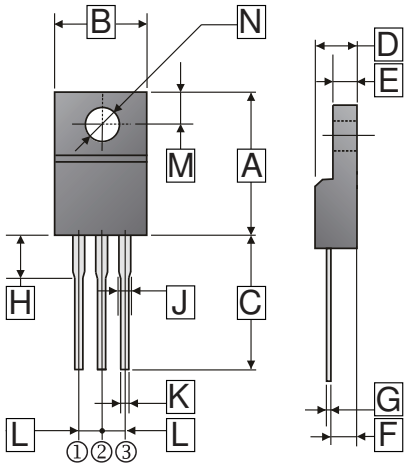

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	14.60	15.70	H	2.70	4.00
B	9.50	10.50	J	0.90	1.50
C	12.60	14.00	K	0.50	0.90
D	4.30	4.70	L	2.34	2.74
E	2.30	3.2	M	2.40	3.00
F	2.30	2.90	N	ϕ 3.0	ϕ 3.4
G	0.30	0.75			

MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Lead solderable per MIL-STD-202 method 208 guaranteed
- Polarity: As Marked
- Mounting position: Any
- Weight: 1.98 g (Approximate)



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25℃ ambient temperature unless otherwise s pecified. Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, de-rate current by 20%.)

Parameter		Symbol	Rating	Unit
Maximum Recurrent Peak Reverse Voltage		V_{RRM}	120	V
Working Peak Reverse Voltage		V_{RSM}	120	V
Maximum DC Blocking Voltage		V_{DC}	120	V
Maximum Average Forward Rectified Current	(Per Leg)	I_F	10	A
	(Per Device)		20	
Peak Forward Surge Current, 8.3 ms single half sine-wave		I_{FSM}	150	A
Voltage Rate of Chance (Rated V_R)		dv/dt	10000	V / μs
Typical Thermal Resistance		$R_{\theta JC}$	4	℃ /W
Operating and Storage Temperature Range		T_J,T_{STG}	-40~150	℃

ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Typ.	Max.	Unit	Test Condition
Maximum Instantaneous Forward Voltage	V_F	0.66	0.7	V	I_F = 3A, T_J = 25℃
		0.71	0.75		I_F = 5A, T_J = 25℃
		0.8	0.85		I_F = 10 A, T_J = 25℃
		0.65	-		I_F = 10 A, T_J = 125℃
Maximum DC Reverse Current at Rated DC Blocking Voltage [2]	I_R	-	0.1	mA	T_J=25℃
		-	10		T_J=100℃
Typical Junction Capacitance [1]	C_J	210	-	pF	

NOTES:

1. Measured at 1MHz and applied reverse voltage of 5.0V D.C.
2. Pulse Test：Pulse Width = 300 μs, Duty Cycle ≦ 2.0%.

RATINGS AND CHARACTERISTIC CURVES

