

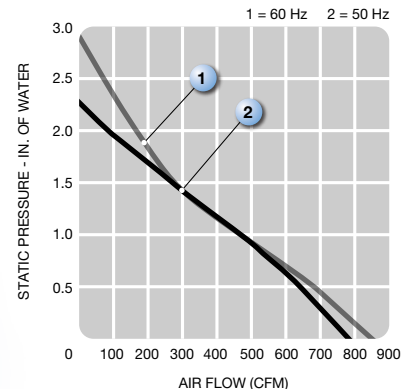


# UF250APA series

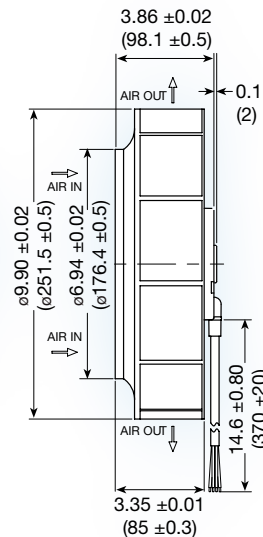

**(251 dia. x 98 mm)**

9.90 dia. x 3.86 inches

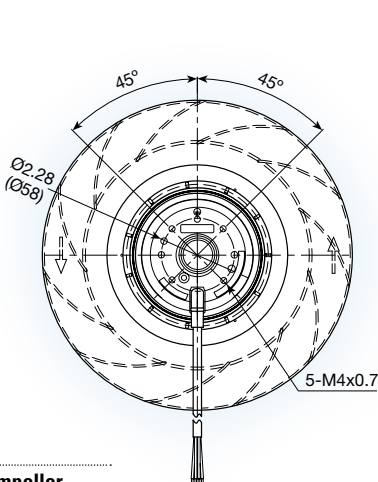

**Features:** backward curved impeller

Operating voltage: 115 or 230 VAC

Operating temp. -40° ~ 50°C

Construction: aluminum die cast motor base;  
UL94V-0 reinforced nylon  
impeller

Bearing option: ball bearing

Motor: permanent split capacitor  
required capacitor included

Air Flow: centrifugal

Connection: AWM 2517 lead wires

Protection: thermal

| Model No.        | Rated Voltage<br>V | Freq.<br>HZ | Input Power<br>W | Rated Cur.<br>A | Locked Cur.<br>A | Speed<br>RPM | Air Volume           |     | Max. Static Pressure (H <sub>2</sub> O) |      | Sound Noise<br>dBa | Weight<br>kg |
|------------------|--------------------|-------------|------------------|-----------------|------------------|--------------|----------------------|-----|-----------------------------------------|------|--------------------|--------------|
|                  |                    |             |                  |                 |                  |              | M <sup>3</sup> /Min. | CFM | MM                                      | INCH |                    |              |
| UF250APA12-H1C2A | 115                | 50          | 170              | 1.50            | 3.10             | 2,600        | 22                   | 770 | 56                                      | 2.2  | 75                 | 3.1          |
|                  | 115                | 60          | 240              | 2.10            | 3.00             | 2,700        | 24                   | 850 | 74                                      | 2.9  | 76                 | 3.1          |
| UF250APA23-H1C2A | 230                | 50          | 170              | 0.77            | 1.57             | 2,600        | 22                   | 770 | 56                                      | 2.2  | 75                 | 3.1          |
|                  | 230                | 60          | 240              | 1.00            | 1.52             | 2,700        | 24                   | 850 | 74                                      | 2.9  | 76                 | 3.1          |