


型号: KH-IPEX3-SMA-RG081-180mm

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

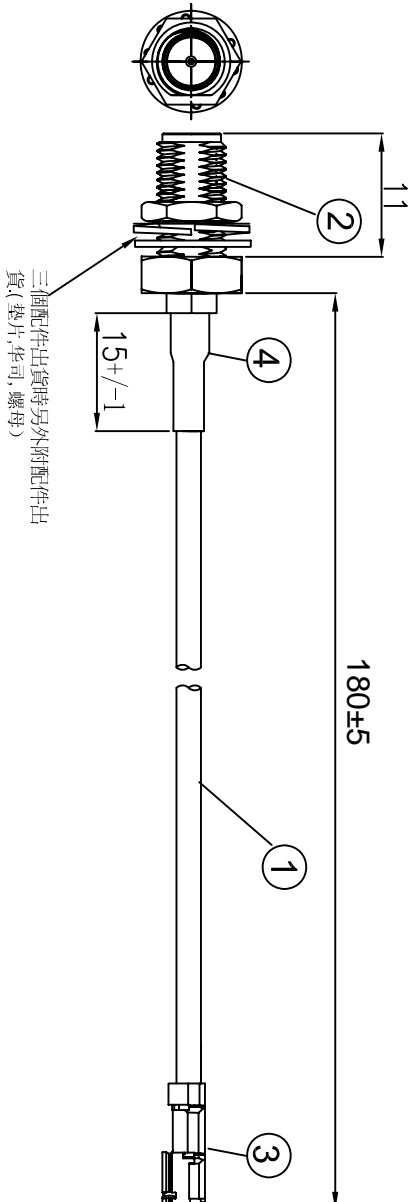

三個配件出貨時另外附配件出貨(墊片,華司,螺母)

NOTES:

- ELECTRICAL:
 - VOLTAGE RATING:DCV 300V 10MS
 - CONDUCTANCE RESISTANCE:3.0 OHMMAX.
 - INSULATION RESISTANCE:5.0M OHM/MIN.
 - THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
- MATERIAL:
 - SEE TABLE
- ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	套管	黑色热缩套管, OD:2.0MM	AS
③	端子	高仿IPEX 0.81 3代端子, 镀金	1
②	接头	SMA母头母针, 分体, 11牙, 镀金	1
①	同轴线	RF 0.81线材,颜色: 黑色, OD:0.81mm	AS


金航标电子有限公司

ALL DIMENSION ARE IN MM		DRAWN	DATE
		Janny	2020-06-18
COMPUTER GENERATED IN SOLIDWORKS		ENG.	
DO NOT SCALE THIS DRAWING		MFG.	
PROJECTION		Q.A.	

I-PEX 0.81 3代 TO SMA /F L=180mm

GENERAL TOLERANCE FOR ANGLES		SIZE	Number	REV
± 1°	± 0.3	± 0.25	± 0.150	A
SCALE: Free		TYPE		SHEET 1 OF 1

技术详询



CUSTOMER P.N.:

4

3

2

1

4

3

2

1

D

C

B

A

D

C

B

A