


Opening/Close of Switch

	Card Detect Switch				
Card Uninsertion	Open				
Card Half Insertion	Open				
Card Insertion	Close				
N/O	<table border="0"> <tr> <td>Open</td> <td>Close</td> </tr> <tr> <td></td> <td></td> </tr> </table>	Open	Close		
Open	Close				

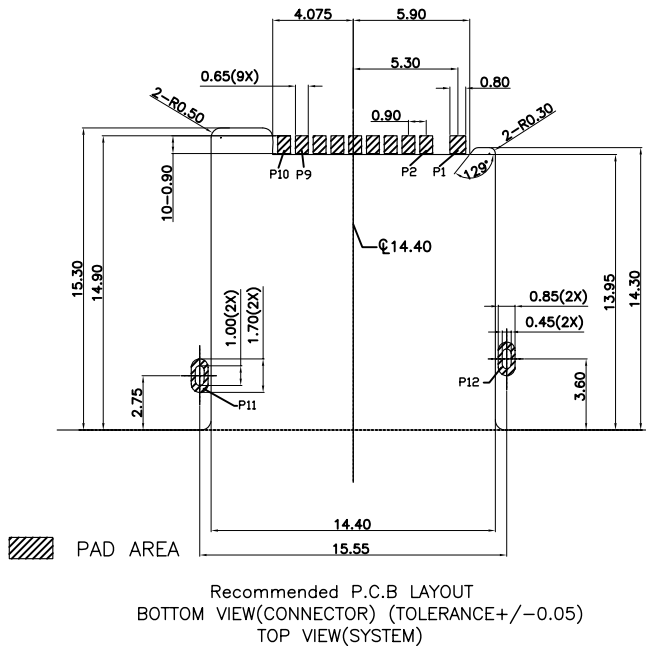

Pin No.	Pin Assignment
P1	MICRO SD CD
P2	MICRO SD DAT1
P3	MICRO SD DAT0
P4	MICRO SD VSS
P5	MICRO SD CLK
P6	MICRO SD VDD
P7	MICRO SD CMD
P8	MICRO SD CD/DAT3
P9	MICRO SD DAT2
P10	MICRO SD GND
P11	MICRO SD GND
P12	MICRO SD GND

NOTE:

- MATERIAL:
 - 1-1 PLASTICS: HEAT RESISTANCE POLYMER, UL94V-0, COLOR:BLACK
 - 1-2 CONTACT: COPPER ALLOY
 - 1-3 SHELL; STAINLESS STEEL
- PLATING:
 - 2-1 CONTACT:
 - 2-1-1: CONTACT AREA: Au 1u" PLATING OVER Ni.
 - 2-1-2: SOLDERTAIL AREA: MATTE TIN 80u" MIN. OVER Ni. 30u" MIN
 - 2-2 SHELL: SOLDERABILITY Ni PLATING OVER ALL
- CONTACT AND TAIL COPLANARITY TO BE 0.10mm MAX.
- PART MUST COMPLY TAI SOL HF WD-3-1-091 SOPECIFICATION
- RECOMMENDING A METAL MORE THAN 0.10 THICK.
PLEASE CONFIRM SOLDILITY, IF USE A METAL MASK LESS THAN 0.10mm THICK.
- PRODUCT PACKING: PLEASE REFER TO THE PACKING REGULATION



深圳市华宇创精密电子有限公司

TOLERANCE:	DRAWN BY :	DATE :	PART NAME:
X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2' X.X' ±0.5'	陈一鸣	2014-02-23	TF PUSH 沉板 2.3H
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	CHECKED BY:	DATE :	PART NO. HYCW136-TF10-230B
	马跃	2014-02-23	MOLD NO.
	APPROVED BY:	DATE :	DRAW NO: HYC-2204011132
	邱敏	2014-02-23	SHEET NO. 1 OF 1