ULTRA THIN D-SUB STRAIGHT P.C.B MOUNT

(MALE TYPE)




070905MS Series

Mates with standard socket

Specifications:

- **9 Circuits**
- **Insulator Material** : Black High Temp. Plastic
- **Operating Temp.Range** : -40˚C to +105˚C
- **Terminal Material** : Brass(Machine Pin)
- **Plating** : Contact-Gold Plated
  : Metal shell- Tin Plated
- **Max. Current Rating** : 2.5A
- **Voltage Rating** : 250V AC
- **Dielectric Strength** : 500V (Min. 60 Seconds)

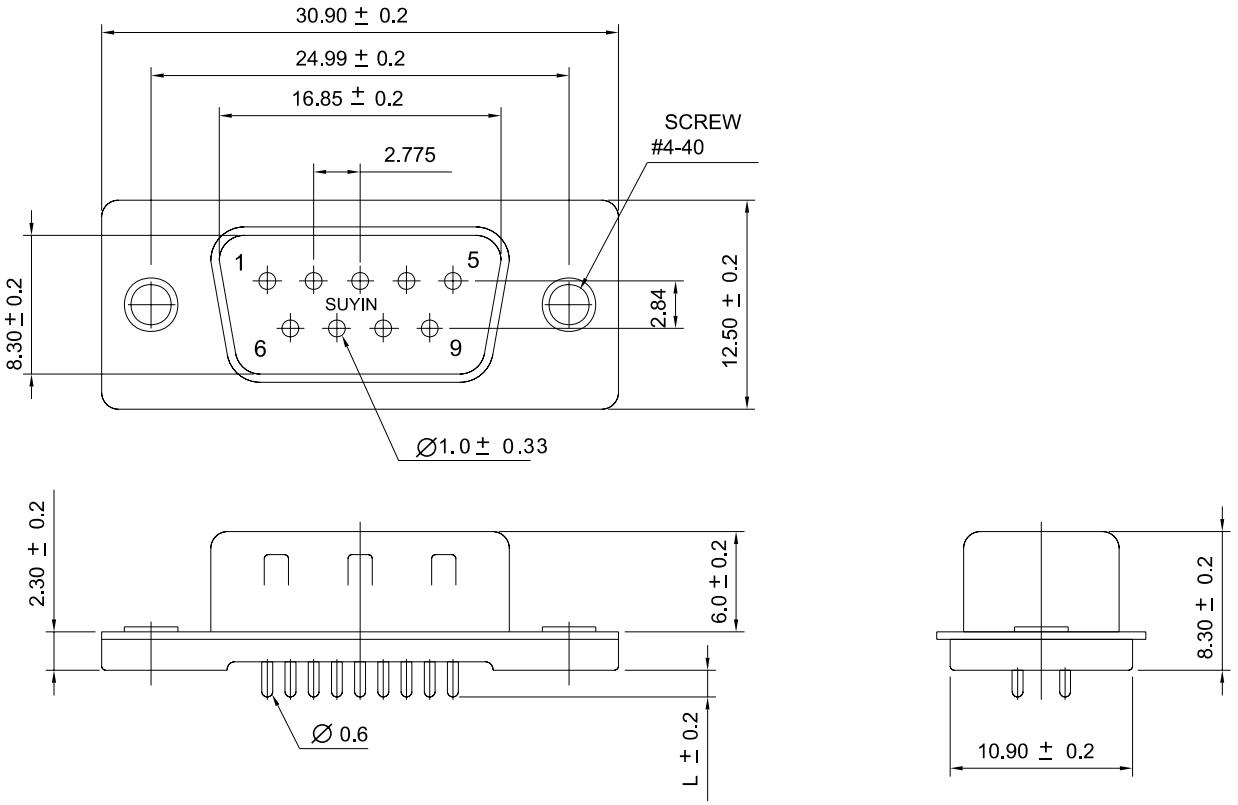

Order Information

070905MS009□□□□ZU
1 2 3 6 45

1. 'B' : Right Angle SMT Type
2. No. of Pins
3. Plating
4. Color 'Z' : Black
5. Package
   'U' : Tube Packge not Cap
6. Pin Length

SUYIN P/NO.	DIM.L
070905MS009□□01ZU	1.6mm
070905MS009□□00ZU	2.2mm

Reference Page 11

Recommended P.C.B Layout

