

- Cost effective
- Available in 1/6W, 1/4W power rating
- Industry standard.

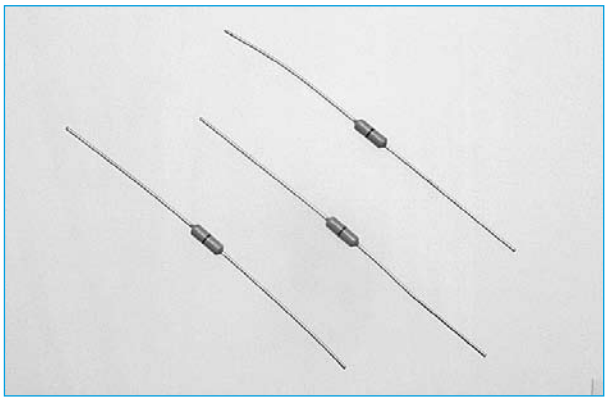

OUTLINE DRAWING

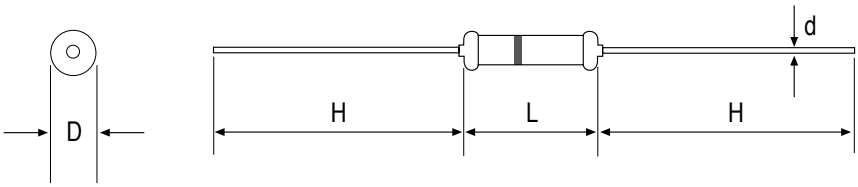

Body colour beige, coded with a single black stripe.

Type	Package	L max.	D max.	d +0.02 -0.05	H
DCO/DZO12	0.125	4.2	2	0.5	28 ± 3
DCO/DZO25	0.25	6.8	2.5	0.6	28 ± 3

DCO = Carbon film
DZO = Steel Slug

DCO suitable for Amistar equipment

SPECIFICATION

Max Resistance	0.005Ω
Current Rating	15 Amps at 70°C for 1/4w 10 Amps at 70°C for 1/6w
Insulation Resistance	Dry - 10,000MΩ Wet - 100MΩ
Dielectric Withstand	500V ac RMS
Insulation Flammability	Resistor insulation is self-extinguishing within 10 seconds after externally applied flame is removed.

ORDERING INFORMATION

DZO	25	T
		Taping
DCO DZO	12 = 1/6W size 25 = 1/4W size	T = Tape & Ammo BD = Tape/Reel

OTHER RESISTORS AVAILABLE - REFER TO SALES OFFICE FOR: METAL OXIDE, CEMENT, AND SPECIAL RESISTORS.