ROHS

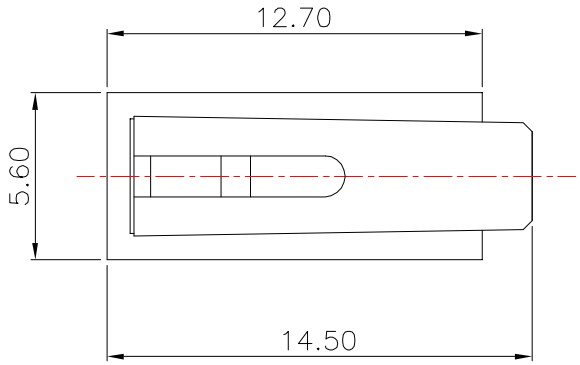

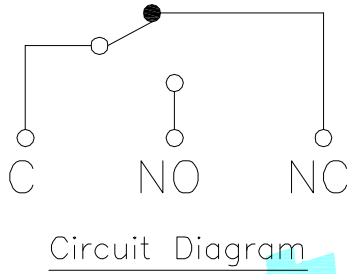

Circuit Diagram

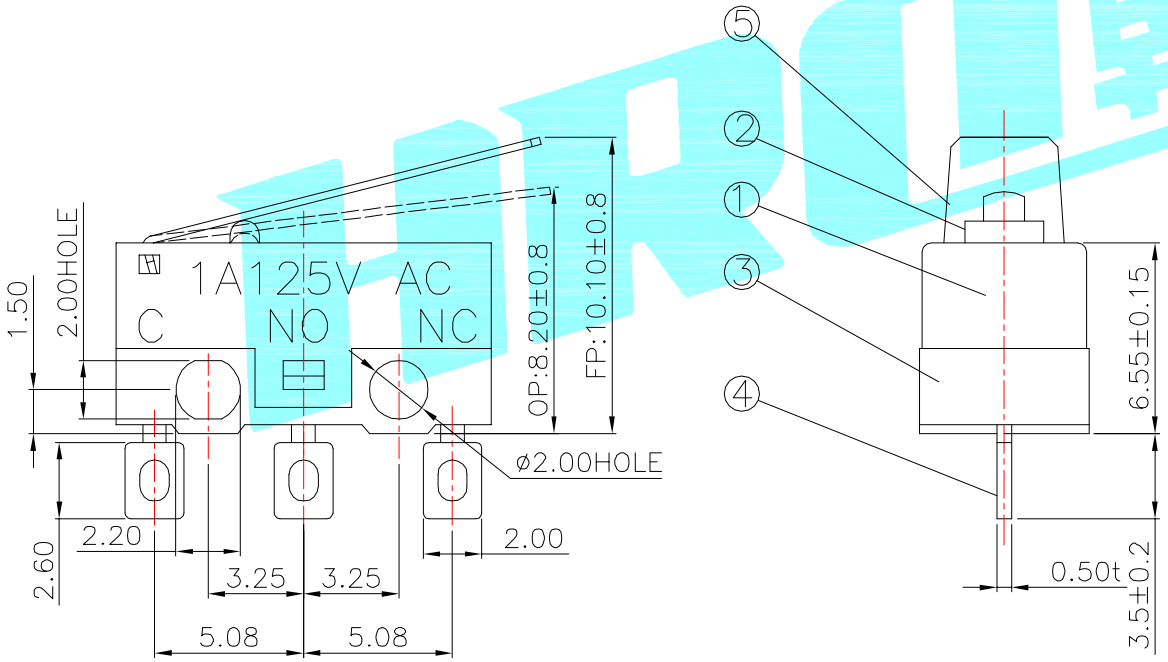

NOTE:
1.Rating:DC30V 0.1A
2.OP:8.20±0.8
3.Operating froce:30±15gf
4.Mechanical Life:3,000,000

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑦	Shrapnel	——	1	Beryllium Copper	——	——
⑥	Contact	——	1	Ag	——	——
⑤	Lever	——	1	Stainess Steel	——	——
④	Terminal	——	3	Brass(0.50t)	Plating silver	——
③	Housing	——	1	PBT	White	——
②	Knob	——	1	POM	White	——
①	Cover	——	1	PBT	Black	——

APPROVALS		DATE
DRAWN	J.X.Zhang	2013/6/4
CHECKED		
APPROVALS		

HRO韩荣® ELECTRONICS CO.,LTD

TOLERANCES ARE			ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	30~以下	±0.30				
	10~30	±0.20				
	5~10	±0.15	±2°	DRAWING NO.	——	SHEET 1 OF 1
	~ 5	±0.10				

TITLE: MICRO SWITCHS
PART NO. K9-1267Q

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——