


ALL DIMS. AND TOLS. PER ANSI Y14.5	NAME	CF	DATE	1/4/85	5372	REV	G
	SCALE	4:1	APPR.			SHT.	OF
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	THIS DOCUMENT AND THE INFORMATION IN IT IS THE EXCLUSIVE PROPERTY OF C&K COMPONENTS, INC., AND IS NOT TO BE USED OR DISCLOSED WITHOUT THE EXPRESS WRITTEN PERMISSION OF C&K COMPONENTS, INC.			<p style="text-align: center;">ADHESIVE</p> <p style="text-align: center;">PIN RETAINING SEAL</p> <p style="text-align: center;">MXXX SERIES</p>			
TOLERANCES							
<table border="0"> <tr> <td>DECIMAL</td> <td>ANGLE</td> </tr> <tr> <td>.XX±</td> <td>.XXX±</td> </tr> <tr> <td></td> <td>±</td> </tr> </table>							
DECIMAL	ANGLE						
.XX±	.XXX±						
	±						

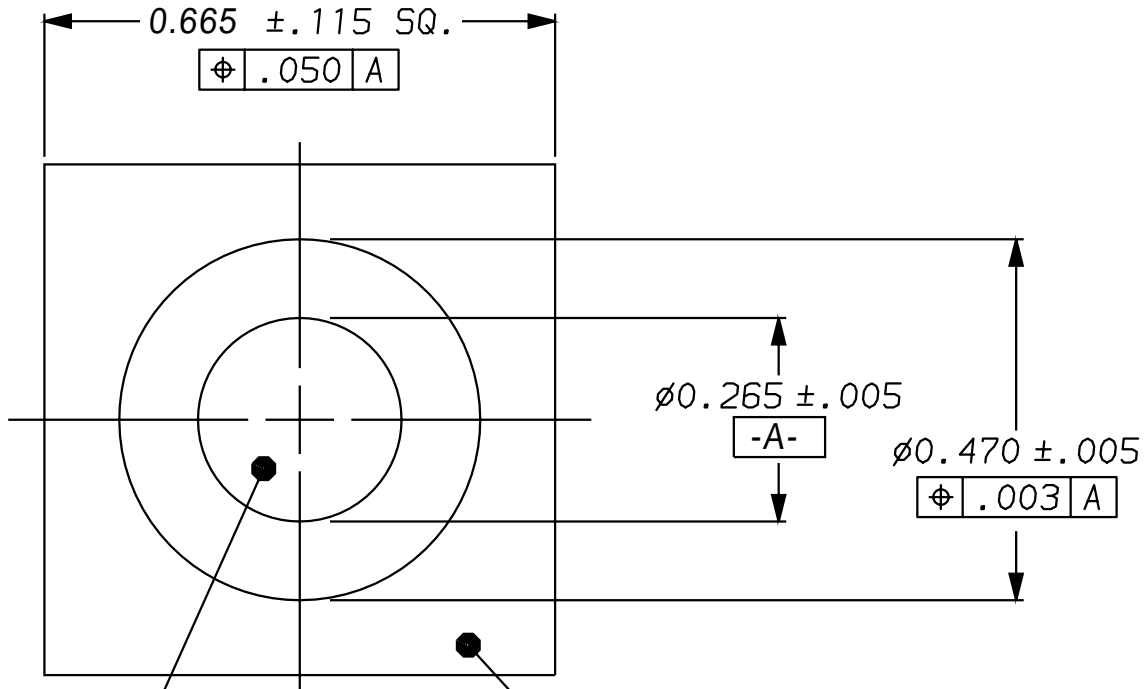

CAD FILE NO.: 5372_g

STAMP CENTER THROUGH

LINER, REMOVE WASTE (OPTIONAL)

NOTES:

- ① 1. MATERIAL: FOIL: 4 MIL. THICK METALIZED MYLAR OR C&K APPROVED EQUIVALENT.
ADHESIVE: 0.005 THICK 3M No. 200 HIGH PERFORMANCE ADHESIVE PRODUCT #468 OR C&K APPROVED EQUIVALENT.

PART NUMBER	COMMENTS
5372-00-000	ACCEPTANCE CRITERIA: THE SEAL & LINER SHALL BE SUPPLIED INDIVIDUALLY AS SHOWN ABOVE.
5372-01-000	ACCEPTANCE CRITERIA: THE SEAL & LINER SHALL BE SUPPLIED ON ROLL WITH PERFORATIONS BETWEEN EACH PIECE. EACH SEAL MUST BE EASILY SEPARATED AT THE PERFORATIONS WITHOUT TOOLS.
① 5372-02-000	SUPPLIED ON PERFORATED STRIPS OF 10 EACH

ECN	SYM	DESCRIPTION	DATE	ECN	SYM	DESCRIPTION	DATE
7588	G	REVISED NOTES AND -02, UPDATED DIM. FORMAT AND GEO. TOLS.	4/4/97 KON				

5372
SHT. OF
REV
G