




1. Mechanical Dimensions:

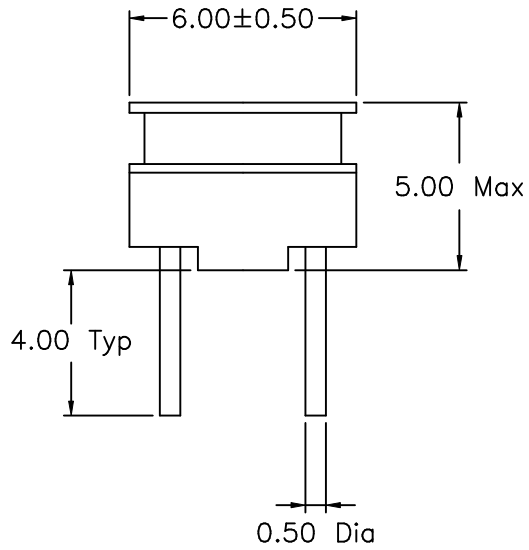

2. Schematic:



3. Electrical Specifications:

INDUCTANCE: 1mH ±20% @1KHz

IDC: 130mA Max

DC RESISTANCE: 7.06 Ohms Max

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: -30°C to +100°C

Doc. Rev. A/1

| | | | |
|--------------------------|----------------------------|--------------------|-----------|
| XFMRs Inc. | Title: Power Inductor | | |
| | UNLESS OTHERWISE SPECIFIED | P/N: XFRCH654-102M | REV. A |
| TOLERANCES: .xx ±0.25 | DWN. | 廖玉坤 | Feb-15-01 |
| Dimensions in MM | CHK. | 李清儿 | Feb-15-01 |
| SHEET 1 OF 1 | APP. | Isaiah M | Feb-15-01 |