


NEW Product



- **30 A current rating**
- **Input voltage range: 8 Vdc to 14 Vdc**
- **Output voltage range: 0.8 Vdc to 3.63 Vdc**
- **Ultra high efficiency: 93% @ 12 Vin and 3.3 Vout**
- **Extremely low internal power dissipation**
- **Minimal thermal design concerns**
- **Designed in reliability: MTBF of 4,435,000 hours per Telcordia SR-332**
- **Ideal solution where board space is at a premium or tighter card pitch is required**
- **Available RoHS compliant**

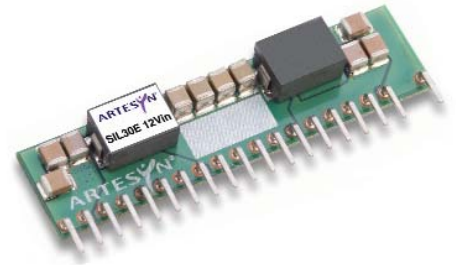

The SIL30E series are non-isolated dc-dc converters packaged in a single-in-line footprint giving designers a cost effective solution for conversion from a 12 V source. The SIL30E has a wide input range (8 Vdc to 14 Vdc) and offers a wide 0.8 Vdc to 3.63 Vdc output voltage range with a 30 A load, which allows for maximum design flexibility and a pathway for future upgrades. The SIL30E is designed for applications that include distributed power, workstations, optical network and wireless applications. Implemented using state of the art surface-mount technology and automated manufacturing techniques, the SIL30E offers compact size and efficiencies of up to 93%.



All specifications are typical at 12 Vin and 1.5 Vout, full load at 25 °C unless otherwise stated
C_{out} = 100 µF

SPECIFICATIONS

OUTPUT SPECIFICATIONS			EMC CHARACTERISTICS	
Voltage adjustability	0.8-3.63 Vdc		Electrostatic discharge	EN61000-4-2, IEC801-2
Setpoint accuracy	±1.3% typ.		Conducted immunity	EN61000-4-6
Line regulation	±0.2% typ.		Radiated immunity	EN61000-4-3
Load regulation	±1.5% typ.		GENERAL SPECIFICATIONS	
Total error band	±3.0% typ.		Efficiency	@ 12 Vin, 3.3 Vout 93% typ.
Minimum load	0 A		Insulation voltage	Non-isolated
Overshoot/undershoot	None		Switching frequency	Fixed 1.3 MHz typ.
Ripple and noise	5 Hz to 20 MHz	50 mV pk-pk 25 mV rms	Approvals and standards	EN60950-1 UL/cUL60950-1
Temperature coefficient	±0.01%/°C		Material flammability	UL94V-0
Transient response	Vout = 1.5 V	50% to 75% load step	Dimensions (LxWxH)	50.84 x 7.80 x 12.70 mm 2.000 x 0.307 x 0.500 inches
Slew rate = 0.5 A/µs	3% max. deviation 10 µs recovery to within ±1.0%		Pin length	0.140 in (3.56 mm)
Remote sense	10% Vo compensation		Weight	7.0 g (0.25 oz)
INPUT SPECIFICATIONS			MTBF	Telcordia SR-332 4,435,000 hours
Input voltage range	8-14 Vdc		ENVIRONMENTAL SPECIFICATIONS	
Input current	No load (max.)	250 mA	Thermal performance	Operating ambient, temperature -40 °C to +85 °C Non-operating -40 °C to +125 °C
Input current (max.)	9.2 A max. @ Io max. and Vout = 3.3 V		PROTECTION	
Input reflected ripple	220 mA rms		Short-circuit	Continuous
Remote ON/OFF	(See Note 1)		Thermal	Automatic recovery
Start-up time	20 ms			

International Safety Standard Approvals



UL/cUL CAN/CSA 22.2 No. E174104
UL 60950 File No. E174104



TÜV Product Service (EN60950) Certificate No. B05 06 38572 055
CB report and certificate to IEC60950

DC-DC CONVERTERS

Non-isolated POL Converter

2

For the most current data and application support visit www.artesyn.com/powergroup/products.htm

NEW Product

OUTPUT POWER (MAX.)	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT (MIN.)	OUTPUT CURRENT (MAX.)	EFFICIENCY (TYP.)	REGULATION		MODEL NUMBER ^(2,3)
						LINE	LOAD	
99 W	8-14 Vdc	0.8-3.63 Vdc	0 A	30 A	93%	±0.2%	±1.5%	SIL30E-12W3V3-VJ

Part Number System with Options

SIL30E-12W3V3-VJ

Product Family
SIL = Single In Line

Rated Output Current
30 = 30 Amps

Performance
E = Enhanced Performance

Packaging Options
J = Pb-free (RoHS 6/6 compliant) ⁽²⁾

Mounting Option
V = Vertical

Output Voltage
0.8 Vdc to 3.63 Vdc

Type of Output
W = Wide

Input Voltage
12 = 8 Vdc to 14 Vdc

Output Voltage Adjustment of the SIL30E-12W3V3 Series

The ultra-wide output voltage trim range offers major advantages to users who select the SIL30E-12W3V3. It is no longer necessary to purchase a variety of modules in order to cover different output voltages. The output voltage can be trimmed in a range of 0.8 Vdc to 3.63 Vdc. When the SIL30E-12W3V3 converter leaves the factory the output has been adjusted to the default voltage of 0.8 V.

Notes

- The SIL30E features a 'Positive Logic' Remote ON/OFF operation. If not using the Remote ON/OFF pin, leave the pin open (the converter will be on). The Remote ON/OFF pin is referenced to ground.

The following conditions apply for the SIL30E:

Configuration	Converter Operation
Remote pin open circuit	Unit is ON
Remote pin pulled low [Von/off < 0.8 V]	Unit is OFF
Remote pin pulled high [Von/off > 2.8 V]	Unit is ON

A 'Negative Logic' Remote ON/OFF version is also possible with this converter. Please consult the factory for details.

- TSE RoHS 5/6 (non Pb-free) compliant versions may be available on special request, please contact your local sales representative for details.
- NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com/powergroup/products.htm> to find a suitable alternative.

Notes

- The derating curve represents the condition at which internal components are within the Artesyn derating guidelines.
- Characteristic data has been developed from actual products tested at 25 °C. This data is considered typical data for the converter.

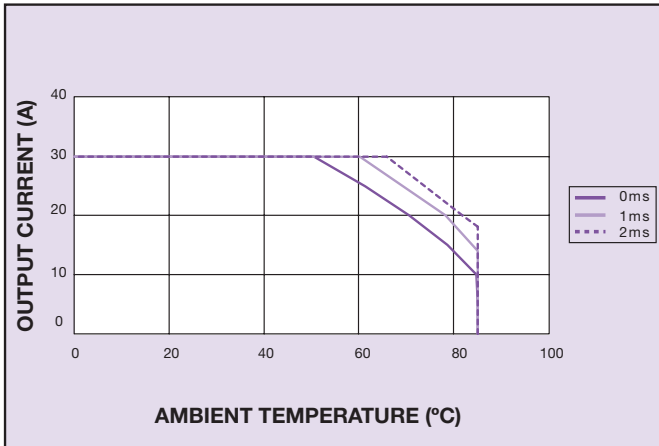


Figure 1 - Derating Curve
Vin = 12 V, Output Voltage = 1.5 V (See Note A)

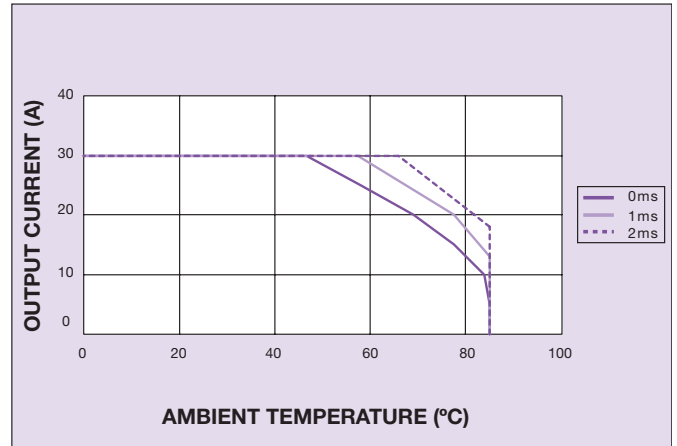


Figure 2 - Derating Curve
Vin = 12 V, Output Voltage = 1.8 V (See Note A)

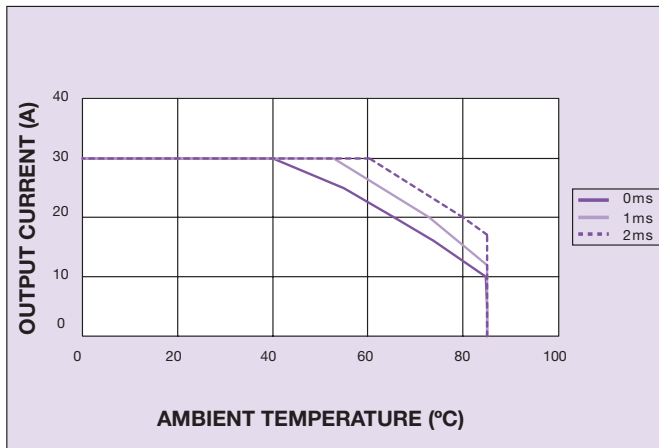


Figure 3 - Derating Curve
Vin = 12 V, Output Voltage = 2.5 V (See Note A)

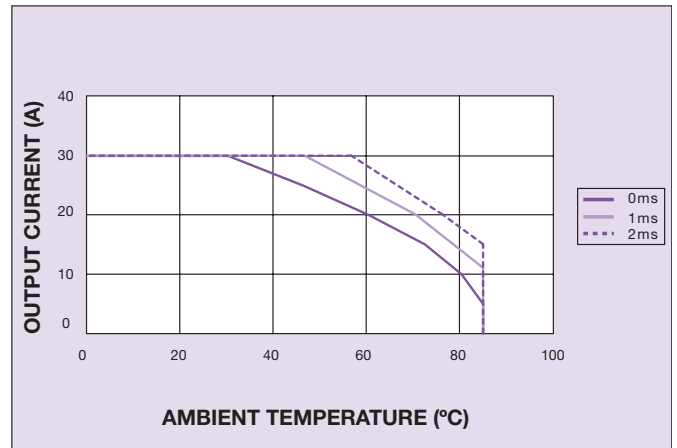


Figure 4 - Derating Curve
Vin = 12 V, Output Voltage = 3.3 V (See Note A)

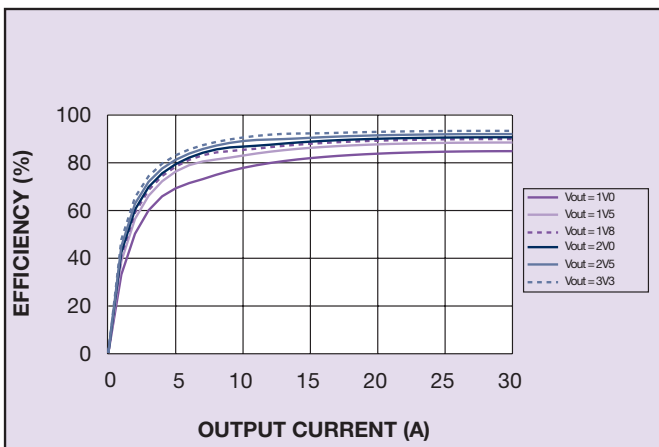


Figure 5 - Efficiency vs Load Current
Vin = 12 V (See Note B)


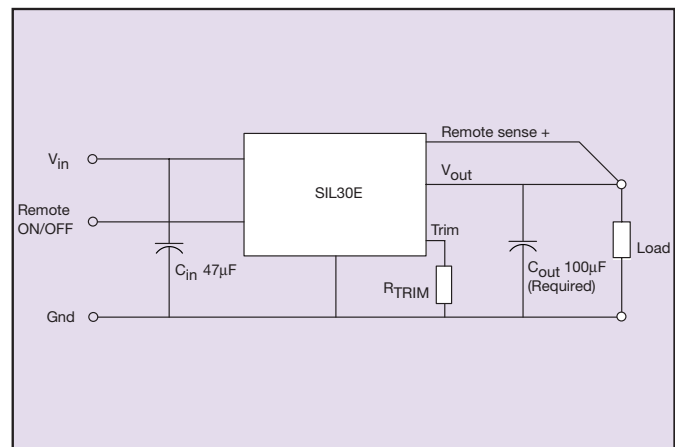


Figure 6 - Standard Application

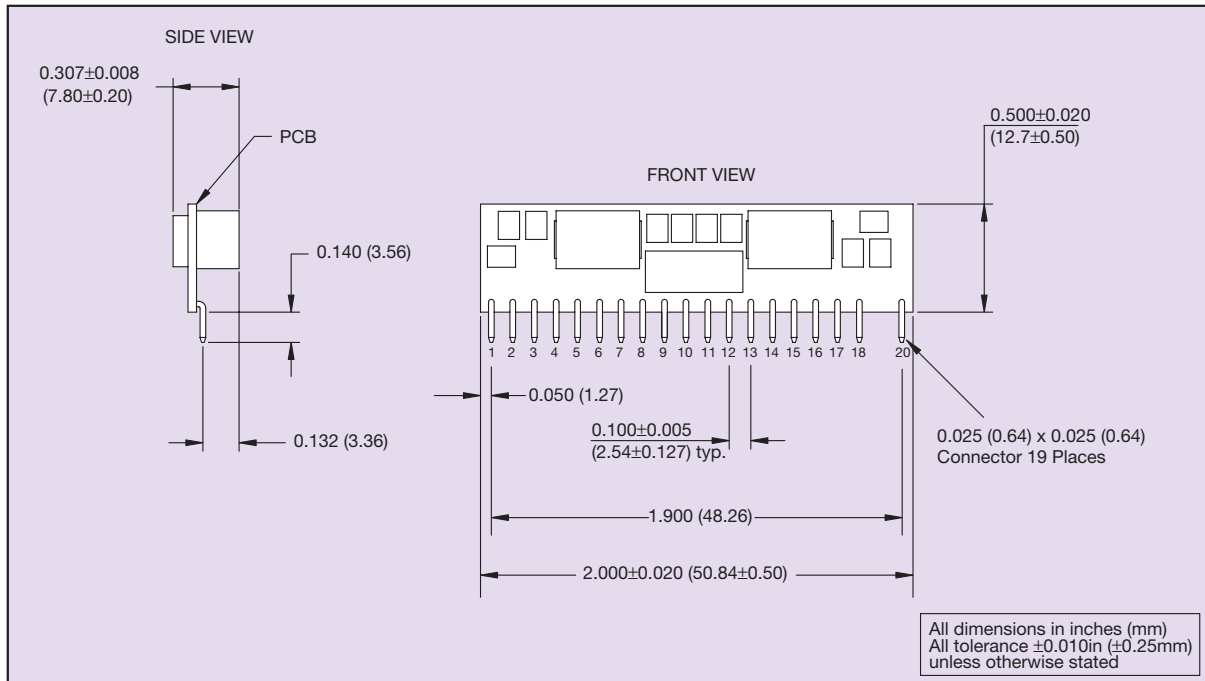

PIN CONNECTIONS			
PIN NO.	FUNCTION	PIN NO.	FUNCTION
1	Vin	11	Vout
2	Vin	12	Vout
3	Ground	13	Remote ON/OFF
4	Ground	14	Ground
5	Trim	15	Ground
6	Remote Sense+	16	Ground
7	Ground	17	Ground
8	Ground	18	Vin
9	Vout	19	N/C
10	Vout	20	Vin

Figure 7 - Mechanical Drawing and Pinout Table