

MAX32590

DeepCover Secure Microcontroller with ARM926EJ-S Processor Core

General Description

DeepCover® embedded security solutions cloak sensitive data under multiple layers of advanced physical security to provide the most secure key storage possible.

The DeepCover Secure Microcontroller (MAX32590) provides an interoperable, secure, and cost-effective solution to build new generations of trusted devices such as multimedia-enabled portable EFT-POS terminals. The MAX32590 integrates a memory management unit (MMU), 32KB of instruction cache, 16KB of data cache, 4KB instruction TCM, 4KB data TCM, 384KB of system RAM, 2KB of one-time-programmable (OTP) memory, 128KB of boot ROM, and 24KB of battery-backed SRAM. The MAX32590 maximizes on-chip bandwidth when dealing with high-speed communication such as 100Mbps Ethernet, large color LCD displays, and gigabit-sized mass storage devices.

In addition to hardware crypto functions, the MAX32590 provides a true random number generator, battery-backed RTC, nonvolatile SRAM, and real-time environmental and tamper-detection circuitry to facilitate system-level security for the application.

The secure microcontroller includes multiple communication interfaces. One USB host controller and one USB device controller with their respective USB transceiver, two smart card controllers, five SPI ports, three UARTs, an SD/SDHC/SDIO controller, an Ethernet 10/100 MAC with FIFO, and an I²C bus are also provided. The three on-chip timers also support PWM output generation for direct control of external devices. An integrated secure keypad and thermal printer interface provide an integrated solution for mobile POS terminals. Additionally, a 3-channel, 10-bit ADC is provided for printer support and general use.

Applications

Electronic Commerce	Secure Access Control
PCI Terminals	Secure Data Storage
PIN Pads	Pay-Per-Play
ATM Keyboards	Certificate Authentication
EMV Card Readers	Electronic Gaming

Ordering Information appears at end of data sheet.

For related parts and recommended products to use with this part, refer to www.maximintegrated.com/MAX32590.related.

ARM926EJ-S is a trademark of ARM Limited.
DeepCover is a registered trademark of Maxim Integrated Products, Inc.

Note: Some revisions of this device may incorporate deviations from published specifications known as errata. Multiple revisions of any device may be simultaneously available through various sales channels. For information about device errata, go to: www.maximintegrated.com/errata.

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at www.maximintegrated.com.

Features


- ◆ **ARM926EJ-S™ Processor Core with 16KB Data Cache and 32KB Instruction Cache**
- ◆ **384MHz Core Operating Frequency Via PLL**
- ◆ **192MHz Multilayer AHB Bus Matrix**
- ◆ **Security Features**
 - ◇ **Secure Boot Loader with Public Key Authentication**
 - ◇ **AES, DES and SHA Hardware Accelerators**
 - ◇ **Modulo Arithmetic Hardware Accelerator (MAA) Supporting RSA, DSA and ECDSA**
 - ◇ **Secure Keypad Controller**
 - ◇ **Hardware True Random Number Generator**
 - ◇ **Die Shield with Dynamic Fault Detection**
 - ◇ **6 External Tamper Sensors with Independent Random Dynamic Patterns**
 - ◇ **256-Bit Flip-Flop Based Nonvolatile AES Key Storage**
 - ◇ **Temperature and Voltage Tamper Monitor**
 - ◇ **Real-Time External Memory Encryption And Integrity Check**
 - ◇ **Real-Time Clock**
- ◆ **Memory**
 - ◇ **384KB System SRAM**
 - ◇ **4KB Instruction TCM, 4KB Data TCM**
 - ◇ **24 KB AES User Encryptable NVSRAM**
 - ◇ **Dual External Memory Controller (LPDDR400, SDRAM, SRAM, NOR Flash, NAND Flash)**
 - ◇ **2KB User-Programmable OTP**
 - ◇ **NAND Flash Controller with Hardware ECC**
- ◆ **I/O and Peripherals**
 - ◇ **USB 2.0 Host/Device with Internal Transceivers**
 - ◇ **Three UART Ports/One I²C Port**
 - ◇ **Five SPI Ports with I²S Functionality**
 - ◇ **Two ISO 7816 Smart Card Interfaces**
 - ◇ **SD/SDHC/SDIO Interface**
 - ◇ **10/100Mbps Ethernet MAC Controller**
 - ◇ **Thermal Printer Interface**
 - ◇ **Three Timers with PWM Capability**
 - ◇ **Up to 160 General-Purpose I/O Pins**
 - ◇ **Three-Channel, 10-Bit ADC**
 - ◇ **LCD Controller Supporting STN and TFT Displays**
 - ◇ **Monochrome LCD Controller**
 - ◇ **16-Channel DMA Controller**
 - ◇ **Advanced Interrupt Controller**
- ◆ **Power Management**
 - ◇ **Flexible Clock Prescalers**
 - ◇ **Clock Gating Function**
 - ◇ **Low-Current Battery-Backup Operation**
 - ◇ **Configurable Low-Power Modes**

ABRIDGED DATA SHEET

MAX32590

DeepCover Secure Microcontroller with ARM926EJ-S Processor Core

Functional Diagram

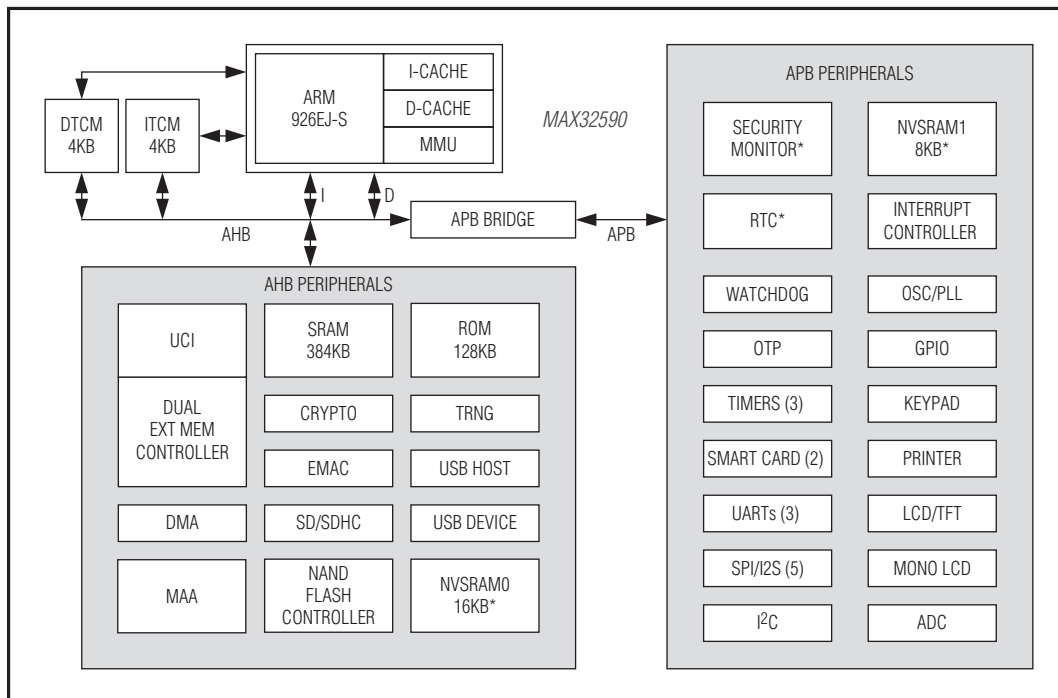

*BATTERY-BACKED CIRCUITRY

MAX32590

DeepCover Secure Microcontroller with ARM926EJ-S Processor Core

Additional Documentation

Designers must have the following documents to fully use all the features of this device. This data sheet contains pin descriptions, feature overviews, and electrical specifications. Errata sheets contain deviations from published specifications. User guides contain detailed descriptions of device features and peripherals from a programming perspective.

- This MAX32590 data sheet, which contains electrical/timing specifications, package information, and pin descriptions.
- The MAX32590 revision-specific errata sheet.
- The MAX32590 User's Guide, which contains detailed information and programming guidelines for core features and peripherals.

Development and Technical Support

Technical support is available at <https://support.maximintegrated.com/micro>.

Ordering Information

PART	PACKAGE	JTAG	PRODUCTION SECURITY
MAX32590-LNS+	324 LFBGA (15mm x 15mm)	No	Yes (Debug disabled)
MAX32590-LNJ+	324 LFBGA (15mm x 15mm)	Yes	No (Prototype/ development)

+Denotes lead(Pb)-free/RoHS-compliant package.

Package Information

For the latest package outline information and land patterns (footprints), go to www.maximintegrated.com/packages. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

PACKAGE TYPE	PACKAGE CODE	OUTLINE NO.	LAND PATTERN NO.
324 LFBGA	X32455+1	21-0601	90-0392

Note to readers: This document is an abridged version of the full data sheet. To request the full data sheet, go to www.maximintegrated.com/MAX32590 and click on **Request Full Data Sheet**.