


# Digital Audio Transformer

# T-1396

Turns Ratio ( ± 2% )	1:1
----------------------	-----


PARAMETER	MIN.	NOM.	MAX.	UNITS
<sup>1</sup> Open Circuit Inductance	225			μHy
<sup>2</sup> Leakage Inductance			0.7	μHy
<sup>2,3</sup> Interwinding Capacitance (C <sub>W/W'</sub> )			2	pF
DC Resistance (any winding)		0.1		ohms
Isolation (HI-POT)	1500			V <sub>RMS</sub>

TEST CONDITIONS:
1. Oscillation Voltage = 100mV & Oscillation Frequency = 10.0 KHz
2. Oscillation Voltage = 100mV & Oscillation Frequency = 100.0 KHz
3. With Shield to Ground

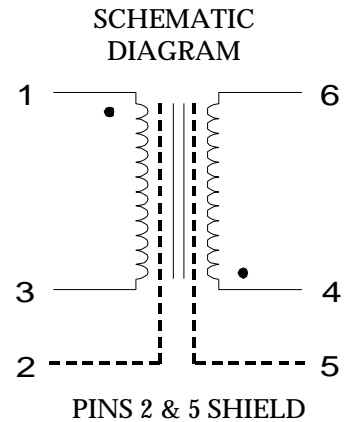


Flammability: Materials used in the production of these units are UL94-VO and meet requirements of IEC 695-2-2 needle flame test.

Parts shipped in anti-static tubes. 50 pieces per tube



PHYSICAL DIMENSIONS  
inches (mm)

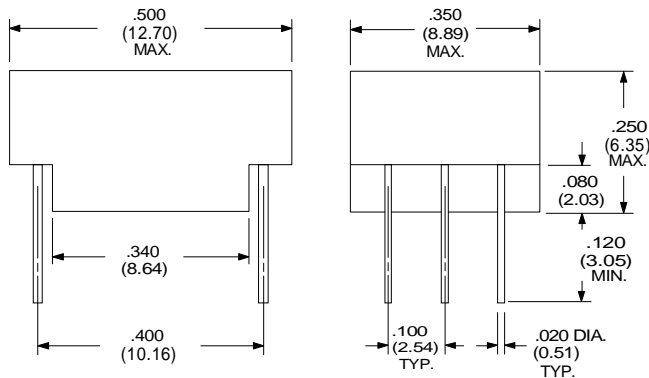

RHOMBUS P/N: T-1396	
CUST P/N:	NAME:
DATE: 05/09/97	SHEET: 1 OF 1