Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

PF351 THRU PF355

35Amp Fast Recover Rectifier 50 to 600 Volts

Features

- Low Cost
- Low Leakage
- Low Forward Voltage Drop
- High Current Capability
- For Automotive Applications

Maximum Ratings

- Standard polarity : Case is Cathode ; Lead is Anode
  Note for positive terminal part number is as shown: PF351P
  For negative terminal add an "N" to the suffix of the part number . i.e. PF351N
- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C


MCC Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
PF351	---	50V	35V	50V
PF352	---	100V	70V	100V
PF353	---	200V	140V	200V
PF354	---	400V	280V	400V
PF355	---	600V	420V	600V

Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	35A	T_A = 125°C
Peak Forward Surge Current	I_{FSM}	600A	8.3ms, half sine
Maximum Instantaneous Forward Voltage	V_F	1.0V	I_{FM} = 35A; T_J = 25°C*
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	5 µA 500µA	T_J = 25°C T_J = 100°C
Typical Junction Capacitance	C_J	100pF	Measured at 1.0MHz, V_R=4.0V


*Pulse test: Pulse width 300 µsec, Duty cycle 2%

PRESSFIT

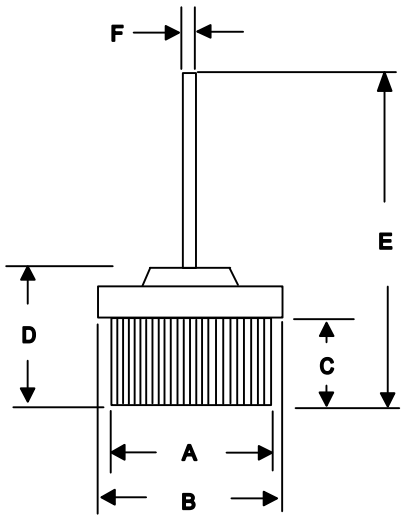


DIMENSIONS					
	INCHES		MM		
DIM	MIN	MAX	MIN	MAX	NOTE
A	0.501	0.505	12.73	12.82	
B	0.621	0.629	15.77	15.97	
C	0.224	0.232	5.70	5.90	
D	0.378	0.390	9.60	9.90	
E	1.102	-----	28.00	-----	
F	0.048	0.052	1.22	1.32	

Figure 1
Typical Forward Characteristics

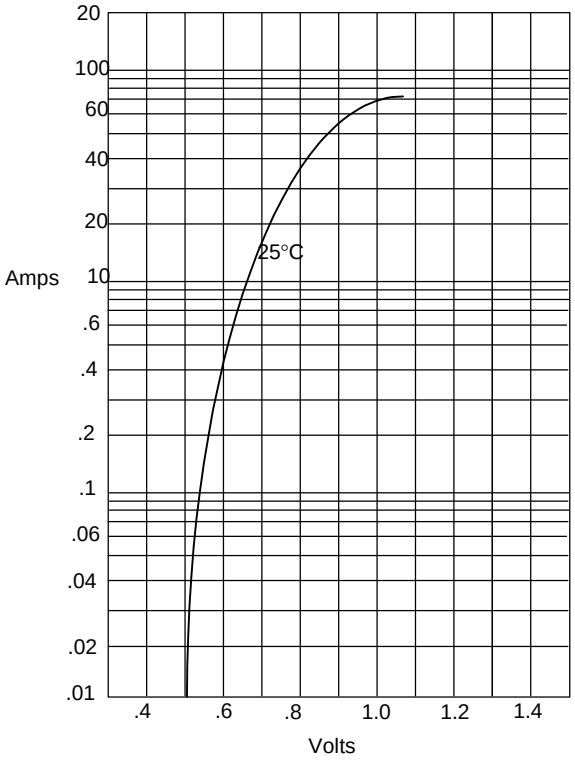


Instantaneous Forward Current - Amperes *versus*
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

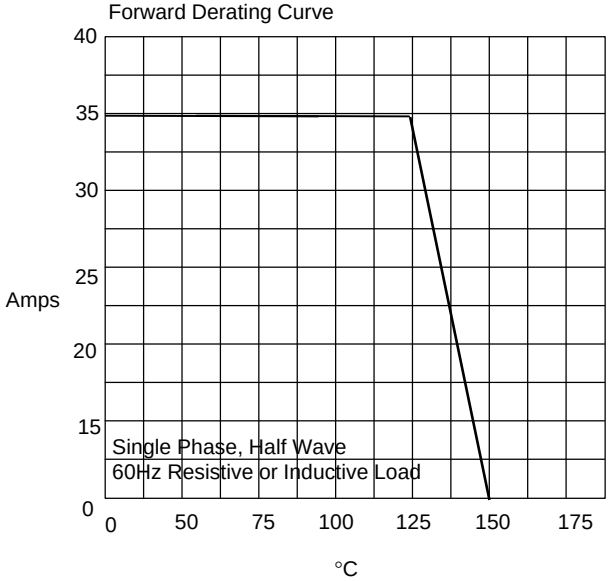


Average Forward Rectified Current - Amperes *versus*
Ambient Temperature -°C

Figure 4
Peak Forward Surge Current

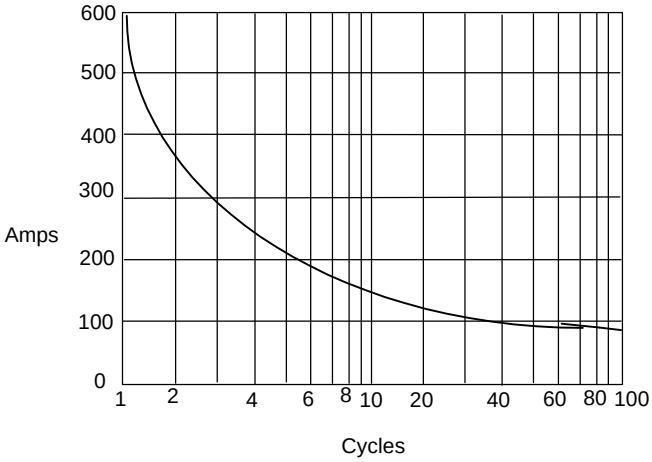

Peak Forward Surge Current - Amperes *versus*
Number Of Cycles At 60Hz - Cycles

Figure 3
Junction Capacitance

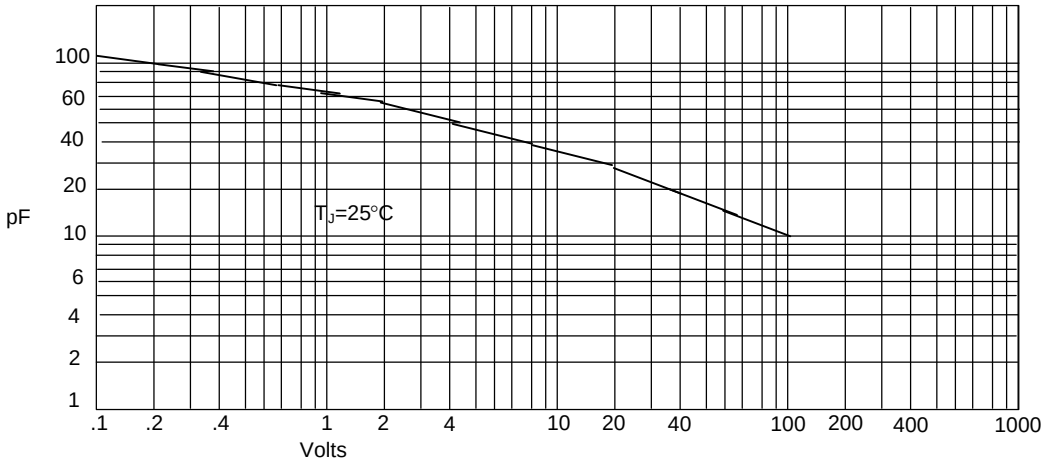

Junction Capacitance - pF *versus*
Reverse Voltage - Volts