

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0334821604

Status:

Active

Overview:

mx150_sealed_connector_system

Description:

3.50mm (.138") Pitch MX150™ Sealed Male Connector, Dual Row, 16 Circuits, Polarization D, without Connector Position Assurance, Brown



Series

image - Reference only

Documents:

- 3D Model

Application Specification (PDF)

Drawing (PDF)
- Product Specification PS-33472-000 (PDF)

RoHS Certificate of Compliance (PDF)

General

Product Family	Crimp Housings
Series	33482
Comments	No Connector Position Assurance (CPA)
More Detailed Tech Information	http://ewcap.uscarteams.org
Overview	mx150_sealed_connector_system
Product Name	MX150™

Physical

Circuits (maximum)	16
Circuits Detail	16
Color - Resin	Black, Green, Natural
Gender	Male
Glow-Wire Compliant	No
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Resin	Modified Polystyrene Alloy
Number of Rows	2
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface (in)	0.138 In
Pitch - Mating Interface (mm)	3.50 mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40°C to +125°C

Electrical

Current - Maximum per Contact	22A
-------------------------------	-----

Material Info

Reference - Drawing Numbers

Application Specification	AS-33472-100
Packaging Specification	PK-30907-811, PK-31300-635
Product Specification	PS-33472-000
Sales Drawing	SD-33482-161

<u>EU RoHS</u>	<u>China RoHS</u>
Compliance Status	
Not Reviewed	
REACH SVHC	
Not Reviewed	
Halogen-Free Status	
Not Reviewed	

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)


Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
33482Series




Mates With
33472 Female Dual Row Sealed Connector

Use With
33000 MX150™ Tin (Sn) Male Terminal,
33011 Gold (Au) Male Terminal



20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

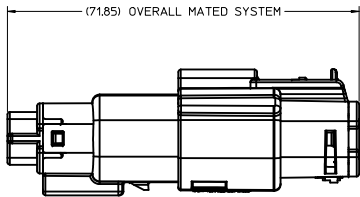


SCALE 1:1

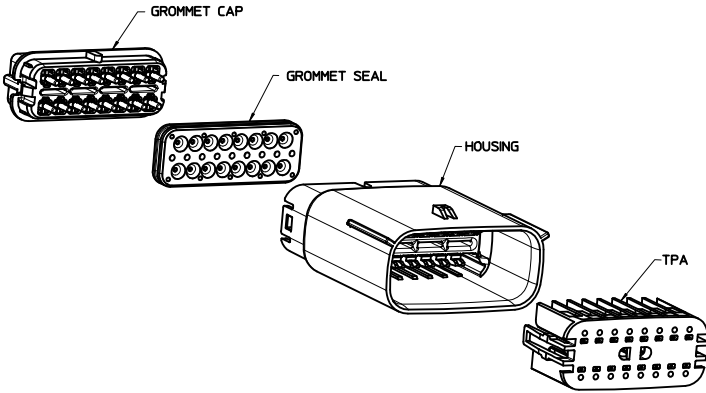




SECTION A-A

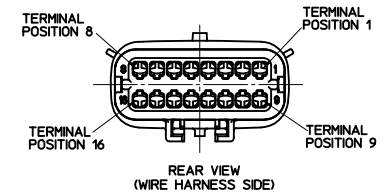

SECTION B-B
(BLADE INSERT SHOWN
IN FULL-LOCK POSITION)
SEE NOTE 2



SECTION E-E
(BLADE INSERT SHOWN
IN PRE-LOCK POSITION)
SEE NOTE 2

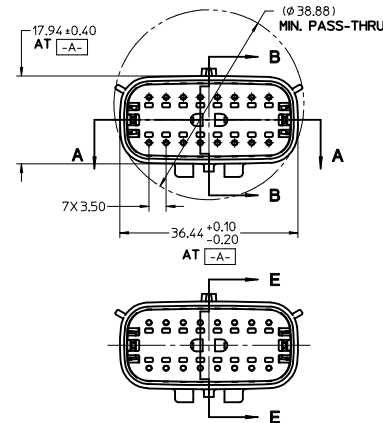

SECTION C-C

NOTES: UNLESS OTHERWISE STATED


1. DESIGNED TO MATE WITH RECEPTACLE HOUSING ASSEMBLY SPECIFIED IN MOLEX CHARTED DRAWING SD-33472-161.
2. ASSEMBLY SHIPPED WITH BLADE INSERT IN PRE-LOCKED POSITION (SEE SECTION E-E PRE-LOCK). UPON FULL TERMINAL ASSEMBLY EACH BLADE INSERT MUST BE SNAPPED INTO ITS FINAL-LOCK POSITION.
3. FOR BLADE TERMINALS TO BE USED WITH THIS ASSEMBLY SEE DRAWING SD-33000-001.
4. SYSTEM TO BE USED WITH WIRE WITHIN DIAMETER RANGE OF 1.5mm TO 2.5mm.
5. MATERIAL: SPS/NYLON BLEND, 20% GLASS FILLED.
6. SHALL CONFORM TO PACKAGING SPECIFICATION PK-31300-635.
7. SHALL CONFORM TO PRODUCT SPECIFICATION PS-33472-000.
8. ASSEMBLY CONFORMS TO SAE/USCAR-2 REV 4 WITH THE FOLLOWING EXCEPTIONS:
TERMINAL INSERTION FORCE FOR WIRE SIZE ABOVE 2.5mm NOT EXCEEDING 2.69mm SHALL NOT EXCEED 45 NEWTONS.

ENTER DESCRIPTION EC NO: UAU2010-1593 DRAWN BY: CHKOSYERZYL CHECKED BY: VKOSHY APPROVED BY: VKOSHY DATE: 2010/03/30 DATE: 2010/04/06	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.10 ± --- 1 PLACE ± 0.3 ± --- ANGULAR ± 3 °	DIMENSION STYLE MM ONLY	SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	TITLE MX150 BLADE CONNECTOR ASSEMBLY 2 ROW SEALED, 16 WAY	MATERIAL NO. SD-33482-161	SHEET NO. 1 OF 3
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

ASSEMBLY PART NUMBER	COLOR	KEYING OPTION	DIMENSIONS (DEGREES)		CAVITY TYPE & STATUS (X = PLUGGED)															
			A	B	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
33482-1601	BLACK	A	60	60																
33482-1602	LT.GRAY	B	25	60																
33482-1603	BROWN	C	60	25																
33482-1604	GREEN	D	25	25																
33482-1605	CUSTOM	TBD																		
33482-1606	BLACK	A	60	60								X								
33482-1607	LT.GRAY	B	25	60								X								
33482-1608	BROWN	C	60	25								X								
33482-1609	GREEN	D	25	25								X								
33482-1610	CUSTOM	TBD										X								
33482-1611	BLACK	A	60	60							X	X								
33482-1612	LT.GRAY	B	25	60							X	X								
33482-1613	BROWN	C	60	25							X	X								
33482-1614	GREEN	D	25	25							X	X								
33482-1615	CUSTOM	TBD									X	X								
33482-1616	BLACK	A	60	60	X						X	X								
33482-1617	LT.GRAY	B	25	60	X						X	X								
33482-1618	BROWN	C	60	25	X						X	X								
33482-1619	GREEN	D	25	25	X						X	X								
33482-1620	CUSTOM	TBD			X						X	X								
33482-1621	BLACK	A	60	60	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
33482-1622	LT.GRAY	B	25	60	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
33482-1623	BROWN	C	60	25	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
33482-1624	GREEN	D	25	25	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
33482-1625	CUSTOM	TBD			X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
33482-1626	BLACK	A	60	60															X	
33482-1627	BLACK	A	60	60	X							X	X							X
33482-1628	LT.GRAY	B	25	60	X							X	X							X
33482-1629	BROWN	C	60	25	X							X	X							X
33482-1630	GREEN	D	25	25	X							X	X							X
33482-1631	CUSTOM	TBD			X							X	X							X
33482-1632	BLACK	A	60	60				X			X	X				X	X	X		
33482-1633	BLACK	A	60	60			X	X	X					X	X	X	X	X	X	X
33482-1634	BLACK	A	60	60							X	X				X	X	X		
33482-1635	LT.GRAY	B	25	60								X					X	X	X	X
33482-1636	BLACK	A	60	60										X	X		X	X	X	X
33482-1637	BLACK	A	60	60										X	X					X
33482-1638	BLACK	A	60	60								X	X	X	X				X	X
33482-1639	BLACK	A	60	60															X	
33482-1640	BLACK	A	60	60					X											X
33482-1641	BLACK	A	60	60					X											
33482-1642	LT.GRAY	B	25	60				X		X	X	X				X		X		
33482-1643	BLACK	A	60	60															X	X
33482-1644	LT.GRAY	B	25	60				X												
33482-1645	LT.GRAY	B	25	60				X		X	X	X								
33482-1646	BLACK	A	60	60				X		X	X	X				X				
33482-1647	BLACK	A	60	60																X
33482-1648	BLACK	A	60	60				X								X				
33482-1649	LT.GRAY	B	25	60																X
33482-1650	LT.GRAY	B	25	60				X								X		X		




KEYING OPTION
SEE TABLE
SCALE 2:1

ENTER DESCRIPTION EC NO: UAU2010-1593 DRAWN BY: 2010/03/30 CHKD BY: 2010/03/30 APPR: VKOSHY 2010/04/06 REV AA	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	TITLE MX150 BLADE CONNECTOR ASSEMBLY 2 ROW SEALED, 16 WAY							
		4 PLACES ± .005 ± .005		DRAWN BY DATE DGR1FF1 THS 05-29-03		MATERIAL NO. VKOSHY 2010/04/06	DOCUMENT NO. SD-33482-161		SHEET NO. 2 OF 3	MOLEX INCORPORATED						
		3 PLACES ± .005 ± .005		CHECKED BY DATE DGR1FF1 THS 05-29-03												
		2 PLACES ± 0.10 ± .005		APPROVED BY DATE VKOSHY 2010/04/06												
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		ANGULAR ± 3 °		SEE TABLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										

19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

ASSEMBLY PART NUMBER	COLOR	KEYING OPTION	DIMENSIONS (DEGREES)		CAVITY TYPE & STATUS (X = PLUGGED)															
			A	B	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
33482-1651	LT.GRAY	B	25	60						X	X	X						X		
33482-1652	LT.GRAY	B	25	60						X	X	X						X		
33482-1653	BLACK	A	60	60									X						X	
33482-1654	BLACK	A	60	60				X				X				X				
33482-1655	LT.GRAY	B	25	60				X				X				X		X		
33482-1656	LT.GRAY	B	25	60								X						X		
33482-1657	BLACK	A	60	60	X						X									
33482-1658	LT.GRAY	B	25	60		X		X		X	X	X				X		X		
33482-1659	LT.GRAY	B	25	60		X				X	X	X						X		
33482-1660	LT.GRAY	B	25	60		X						X						X		
33482-1661	BLACK	A	60	60		X		X				X				X				
33482-1662	LT.GRAY	B	25	60		X		X				X				X		X		
33482-1663	BLACK	A	60	60		X						X								
33482-1664	BLACK	A	60	60			X					X		X	X				X	X
33482-1665	BLACK	A	60	60			X	X	X	X	X	X		X	X				X	X
33482-1666	BLACK	A	60	60		X				X	X	X		X			X	X	X	X
33482-1667	BLACK	A	60	60		X			X	X				X			X	X	X	X
33482-1668	BLACK	A	60	60		X			X	X				X	X		X	X	X	X
33482-1669	BLACK	A	60	60		X				X				X			X	X		
33482-1670	BLACK	A	60	60		X		X	X	X	X	X		X	X	X	X	X		
33482-1671	BLACK	A	60	60		X		X	X	X				X		X	X	X		
33482-1672	BLACK	A	60	60			X				X									
33482-1673	BLACK	A	60	60		X				X	X	X								
33482-1674	BLACK	A	60	60		X				X	X									
33482-1675	BLACK	A	60	60		X			X	X					X					
33482-1676	BLACK	A	60	60					X	X	X	X					X			
33482-1677	BLACK	A	60	60					X	X	X	X			X		X			
33482-1678	BLACK	A	60	60					X	X	X	X				X	X	X		
33482-1679	BLACK	A	60	60					X	X	X	X			X	X	X	X		
33482-1680	BLACK	A	60	60					X	X	X	X			X	X	X	X	X	
33482-1681	BLACK	A	60	60							X							X		
33482-1682	BLACK	A	60	60					X	X	X							X	X	
33482-1683	BLACK	A	60	60					X	X	X	X						X	X	
33482-1684	BLACK	A	60	60	X	X	X	X	X	X		X					X	X	X	X
33482-1685	BLACK	A	60	60								X					X	X	X	X
33482-1686	BLACK	A	60	60								X					X	X	X	X
33482-1687	BLACK	A	60	60							X	X			X	X	X	X		
33482-1688	BLACK	A	60	60							X	X				X	X	X	X	
33482-1689	BLACK	A	60	60							X	X			X		X			
33482-1690	BLACK	A	60	60					X							X				
33482-1691	BLACK	A	60	60					X							X				
33482-1692	BLACK	A	60	60		X							X	X					X	X
33482-1693	BLACK	A	60	60		X							X						X	
33482-1694	BLACK	A	60	60		X			X	X	X	X	X	X		X		X	X	X
33482-1695	BLACK	A	60	60		X			X	X	X	X		X		X		X	X	
33482-1700	BLACK	A	60	60	X	X	X	X	X	X				X	X	X	X	X	X	X
33482-1701	BLACK	A	60	60	X	X	X	X	X	X				X	X	X	X	X	X	X
33482-1702	BLACK	A	60	60						X	X	X	X	X	X	X	X	X	X	X
33482-1703	BLACK	A	60	60						X	X	X	X	X	X	X	X	X	X	X
33482-1704	BLACK	A	60	60	X	X	X	X	X	X							X	X	X	
33482-1705	BLACK	A	60	60										X	X	X	X	X	X	X
33482-1706	BLACK	A	60	60										X	X	X	X	X	X	X
33482-1707	BLACK	A	60	60							X	X	X	X						
33482-1708	BLACK	A	60	60													X	X	X	
33482-1709	BLACK	A	60	60												X	X	X	X	X
33482-1710	BLACK	A	60	60	X	X	X	X	X	X	X	X	X	X						



ENTER DESCRIPTION EC NO: UAU2010-1593 DRAWN BY: DRWNAH01 CHKD BY: CHKDSYRZYL APPR: VKOSHY REV: AA	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
				DRAWN BY DATE DGR1FF1THS 05-29-03		TITLE MX150 BLADE CONNECTOR ASSEMBLY 2 ROW SEALED, 16 WAY			
				CHECKED BY DATE DGR1FF1THS 05-29-03		APPROVED BY DATE VKOSHY 2010/04/06			
				MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-33482-161			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE D		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1