

## SPECIFICATIONS

Rated(额定参数): 150V,4A  
 Dielectric strength(抗电强度): AC:1250V/1 Minute  
 Insulation Resistance(绝缘电阻):1000MΩ Min  
 Contact Resistance(接触电阻):20mΩ Max  
 Temp. range(操作温度): -40°C~+105°C  
 MAX Soldering(瞬时温度):+250°C,5s

Housing Material(塑件): PA66 (UL94 V-0)  
 Contact(端子): Brass, Tin plating(黄铜镀锡)

PITCH RANGE		NOMINAL DIMENSION RANGE	
IN MM	OVER	IN MM	OVER
TO 6	10	TO 30	60
TO 10	24	TO 30	100
TO 10		TO 60	150
±0.10	±0.15	±0.25	±0.30
		±0.30	±0.50
		±0.50	±0.70
			±1.00

## Ordering Information




JL15EDGVC-XXX XX X X 1

Pitch  
 250=2.50PH  
 254=2.54PH

No. of pins  
 2P~24P

Housing Color  
 B=Black  
 G=Green  
 U=Blue  
 R=Red  
 W=White  
 Y=Yellow  
 O=Orange  
 E=Grey

Packing  
 O=Pe bag  
 T=Tube  
 A=Troy

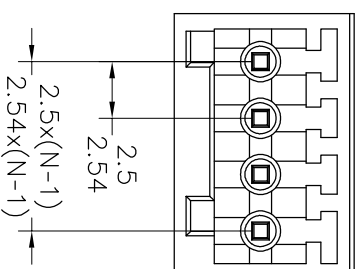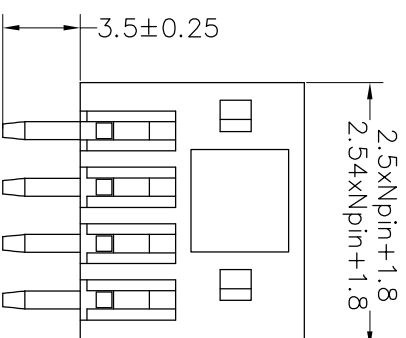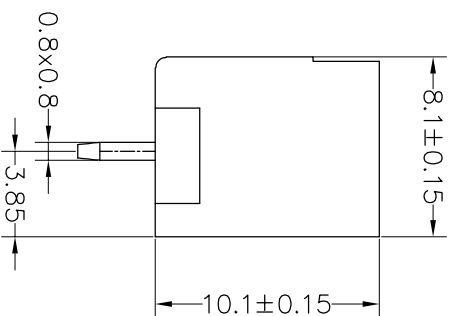

OPERATION		DRAW		SCALE		FIT		PART NO.	
XX	±0.30	Ben	2017.01.05	UNIT	mm	mm	A4	JL15EDGVC-XXXXXXX1	
X:XX	±0.20	CHECK		SIZE		SHEET	1/1	2.50/2.54mm Pitch Male	
X:XXX	±0.10	APPROVE		PROU.				Pluggable Terminal Blocks	
Angle	±3'								
DIM	TOL								
REV	DATE	MODIFICATION DESCRIPTION	CHANGE						
1									
2		NEW DRAWING							
3									

**JILIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992