

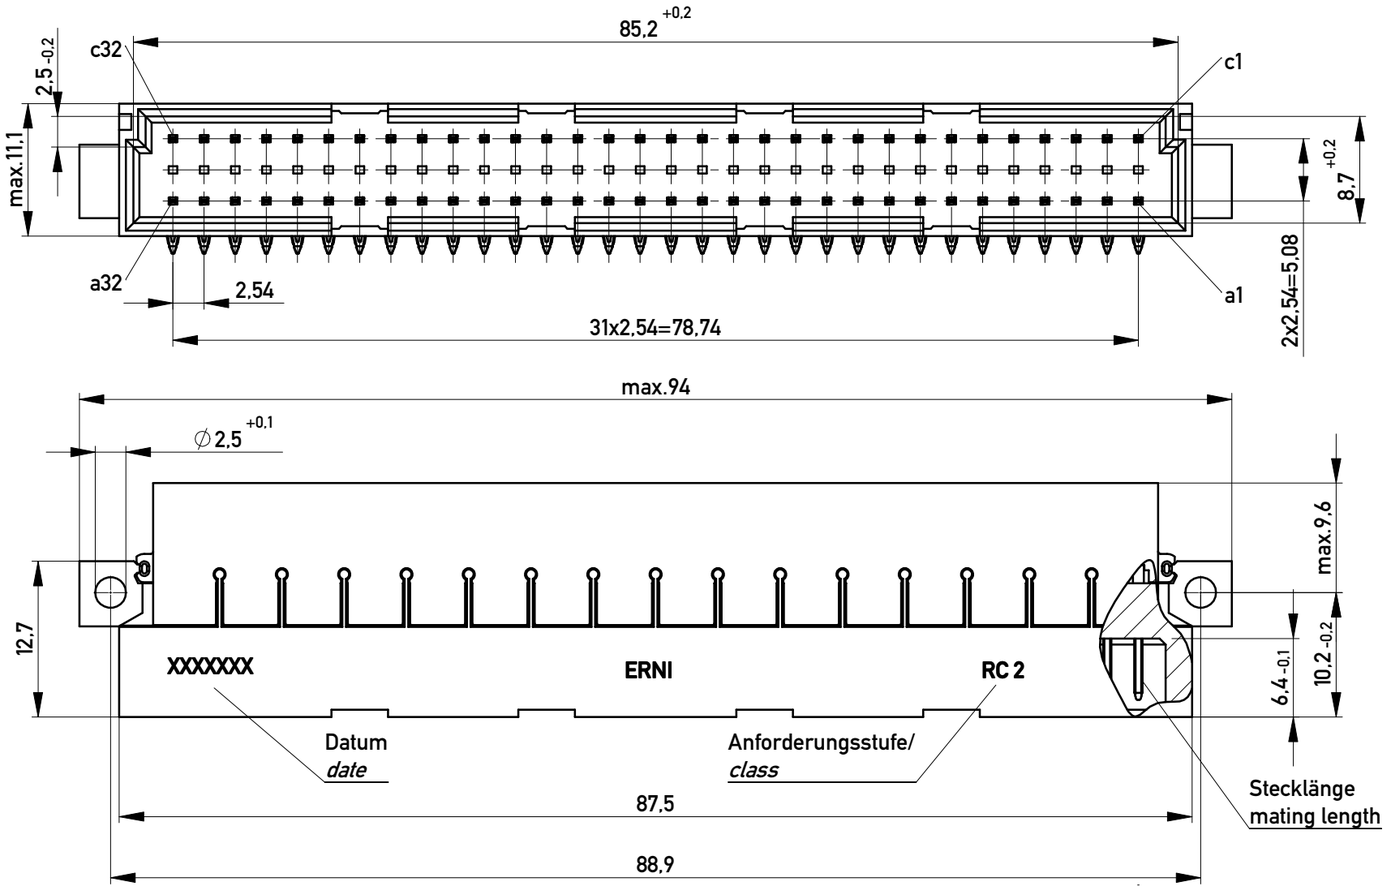


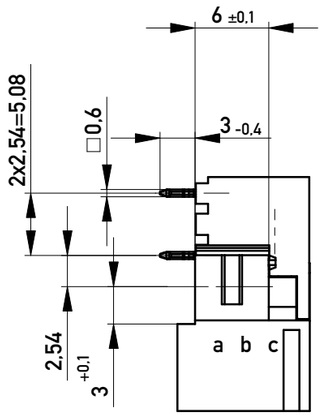


Stecklänge / mating length




E = *early mate, late break* / voreilend

S = standard


L = late mate, early break / nacheilend

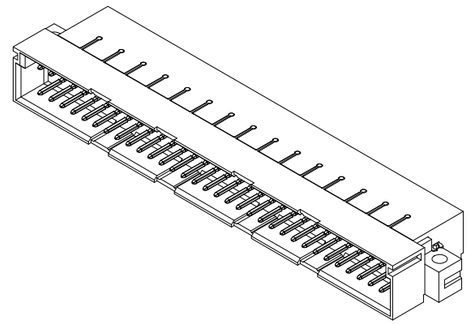

Bestückungsplan / *contact layout*

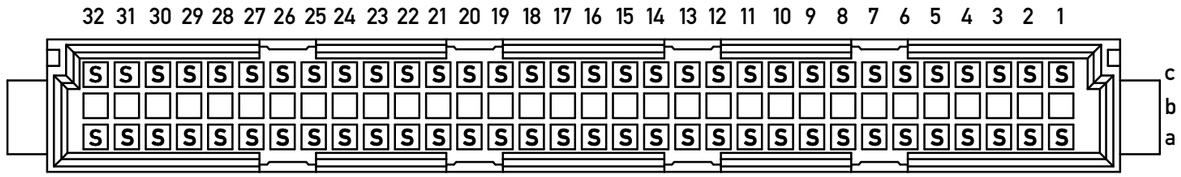

Leiterplatten-Lochbild / *PCB drillhole pattern*

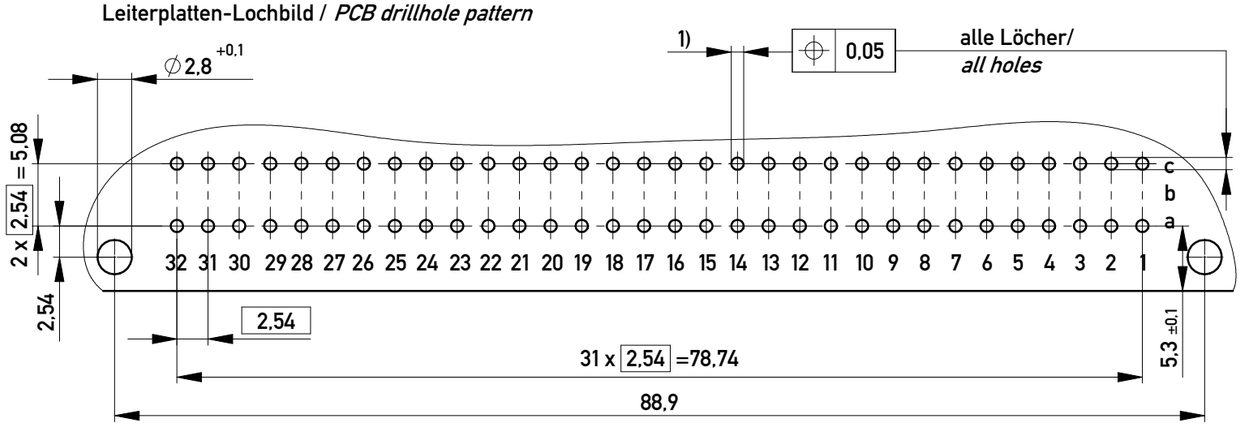

Elastische Einpresszone / *compliant pressfit zone*
Isolierwerkstoff */ housing material : PBT GF 30*
Bauart 4 / t*ype 4*
Anforderungsstufe 2 = 400 Steckzyklen */ performance class 2 = 400 mating cycles*
Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2
Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2
Schichtaufbau im metallisierten Loch siehe Zeichnung 114124
diameter of drilled hole see drawing 114124
1) $\varnothing 1{,}0^{+0.09}_{-0.06}$ Durchmesser des metallisierten Loches
$\varnothing\ 1{,}0^{+0.09}_{-0.06}$ *Diameter of finished platet-through hole*

Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16016 to be observed.

Information:

Tolerances

All Dimensions in mm

Scale 2:1

All rights reserved.
Only for Information.
To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.

Subject to modification without prior notice.
Drawing will not be updated.

www.ERNI.com

Designation

Messerleiste C 64 EE

Male Con. C 64 EE

100103210153

I

A3

Index		Date
a		19.07.2016

Class STVC