
LF (70/455 kHz)

BIS C-108-11/L
Order Code: BIS000H

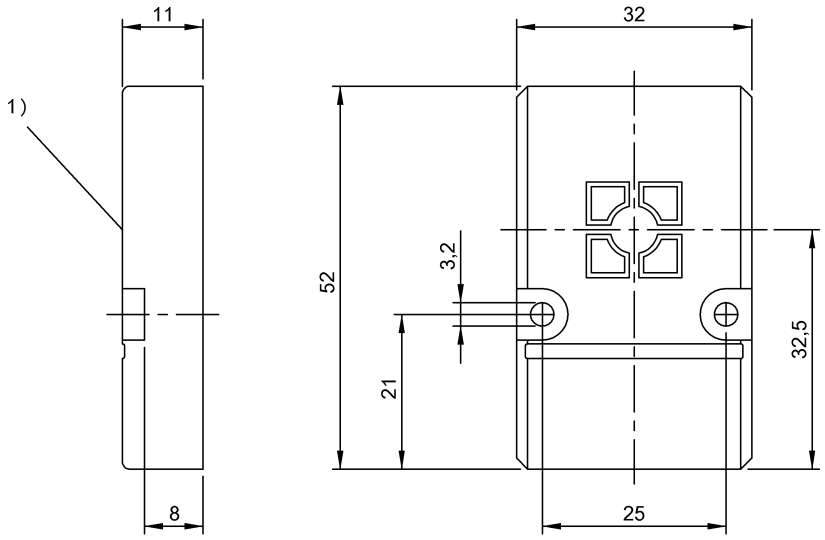

1) Sensing surface

Basic features

Antenna type	round
Approval/Conformity	CE cULus EAC WEEE
EN 55011	Size 1, Cl. A
Principle of operation	Data carrier

Electrical data

Memory organization	64 × 8 bits
Programming cycles	up to 70 °C: 500,000 up to 30 °C: 1,000,000
Programming time	for 1x8 bits: 0.45s for 64x8 bits: 1.1s
Read cycles	Unlimited
Read time	for 64x8 bits: 0.33 s

Environmental conditions

Ambient temperature	-30...70 °C
Continuous shock load	yes
EN 60068-2-27, Shock	yes
EN 60068-2-32 Free fall	yes
EN 60068-2-6, Vibration	yes
IP rating	IP68
Storage temperature	-30...85 °C

Functional Characteristics

Memory type	EEPROM
User data, read/write	2047 Byte

Material

Housing material	PBT

Mechanical data

Application weight	28.00 g
Dimension	32 x 11 x 52 mm
Installation	metal-free (clear zone) on metal flush in metal

Remarks

Only together with converter BIS C-901 or BIS C-6xx and the appropriate read/write head.
Values are under rated conditions unless otherwise specified.
For installation requirements see corresponding read/write head.

Time specification includes data check.
IP68 tested according to BWN Pr 36
On the last page only 63x8 bits are usable.