

SFP-9321 Version: 2

---

## 1.25G SMF BIDI SFP Transceiver, 20km, T1310/R1550nm

The LevelOne SFP-9321 is a high performance, cost-effective SFP transceiver. It provides up to 1.25 Gbps bi-directional data transfer rate at distances up to 20km on a single fiber core. These bi-directional SFP Transceivers allow data transfer in either direction through a single optical fiber by employing separate wavelengths travelling in either direction.

The SFP-9321 transmits using a wavelength of 1310nm and receives using a wavelength of 1550nm. When coupled with the LevelOne SFP-9331 transceiver which transmits at and receives at the opposite rates (1310nm TX and 1550nm RX) you get bi-direction data communication on a single fiber core.



---

### Key Features

- 1310nm FP LD
- Multi Data Rate: from 125M to 1.25Gbps, NRZ
- Single +3.3V Power Supply
- RoHS Compliant and Lead-free
- AC/AC Differential Electrical Interface
- Compliant with Multi-Source Agreement (MSA)
- Simplex LC Connector
- Compliance with specifications for IEEE-802.3z Gigabit Ethernet at 1.25Gbps
- Compliance with ANSI specifications for Fiber
- Channel applications at 1.06bps
- No configuration or installation software required
- Eye Safety Designed to meet LASER Class 1 comply with EN60825-1



## Specifications

### System Specifications

**Connectors and Cabling:**

Simplex LC Connector, Single-mode fiber(SMF)

**Wavelength(nm):**

T 1310nm / R 1550nm

**Transmit Power:**

-8~ -3 dBm

**Power Budget:**

15 dB

**Power:**

Supply Voltage: 3.3V

Max Voltage/Current: 6V/300mA

**Standards & Protocols:**

IEEE 802.3ah 1000BASE-BX10-U

SFP Multi-Sourcing Agreement(MSA)

**Receive Sensitivity(dBm):**

-23 dBm

### Features

**General:**

Hot-swappable

### Performance

**Data Transfer Rate:**

1.25 Gbps Bi-directional data link

**Operating Distance:**

up to 20km (9/125?m)

Fiber channel up to 1.06Gbps

### Environment

**Temperature (°C):**

Operating: 0°C ~ 70°C

Storage: -40 ~ 85°C

**Humidity (Non-condensing):**

5 ~ 95%

### Physical Specifications

**Dimensions (W x D x H mm):**

13.7 x 56.5 x 8.95 mm

**Weight (g):**

20g


### Others

**Approval and Compliance:**

Class 1 eye safety and comply with EN 60825-1

CE, FCC, RoHS

## Diagram

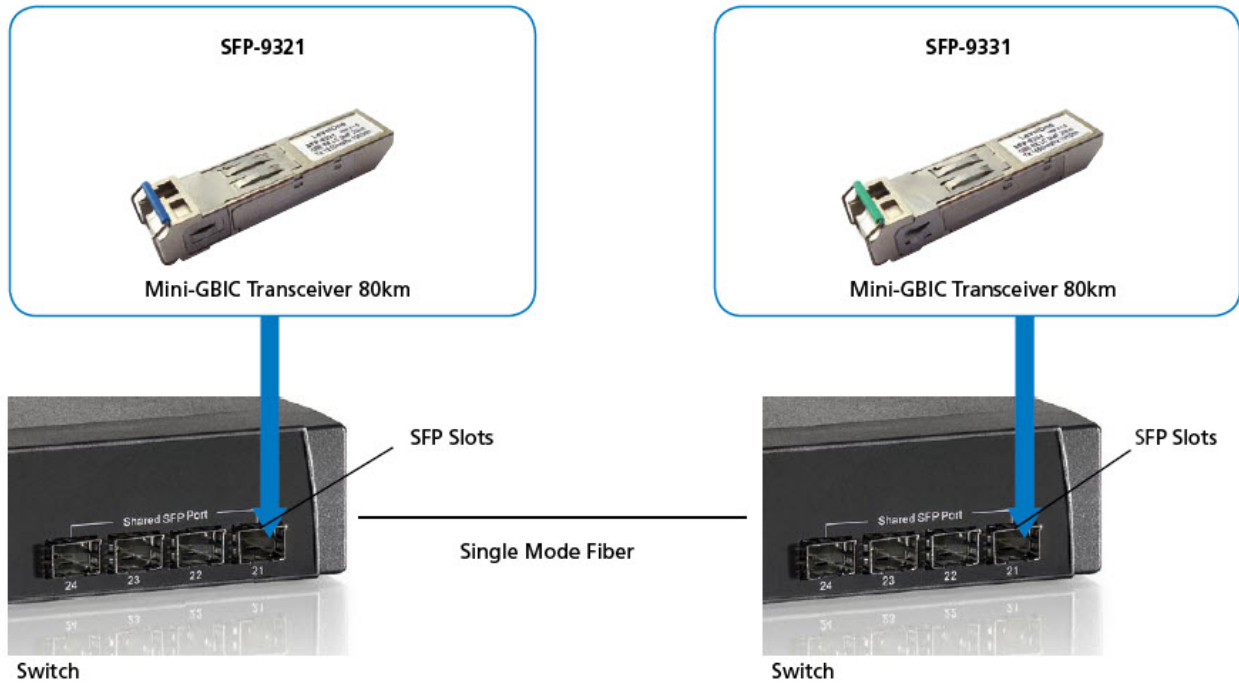

## Order Information

SFP-9321



All mentioned brand names are registered trademarks and property of their owners.  
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.