

7" Wide Screen Fanless Multi-touch Panel PC
with Intel® Celeron® J1900 Processor



Features

- 7" 16:9 Wide Screen Projected Capacitive Touch Panel PC
- Front Panel IP54
- Resolution: 800 x 480, Brightness 350nits Anti Vandal Glass
- Internal SATA 2.5" HDD and mSATA
- Socket Panel and VESA Mounting

Applications

- Human Machine Interface (HMI)
- Factory / Manufacturing Automation
- ATM / Self-service / Kiosk
- Applications Vending Machine / Ticketing Machine

Packing List

Description
1 x GSR-72PW
1 x Driver CD
1 x Power Adapter
4 x Panel Mounting Screws


Optional Items

Part No.	Description
AWD-WF001	wifi 802.11 b/g/n (1T1R) + 1 antenna , Half size
AWD-WF002	wifi 802.11 b/g/n + BT4.0(1T1R) + 2 antennas (dual band), Half size
AWD-WF003	wifi 802.11 a/b/g/n/ac/BT4.0 (2T2R) + 2 antenna (dual band), Half, size
ACS-100-STD	VESA Table Stand

Ordering Information

Part No.	Description
GSR-72PW-A1	7" 16:9 LCD (800 x 480), Fanless Panel PC with Intel® Celeron® J1900 2.0GHz CPU, Projected Capacitive Touch

Dimensions

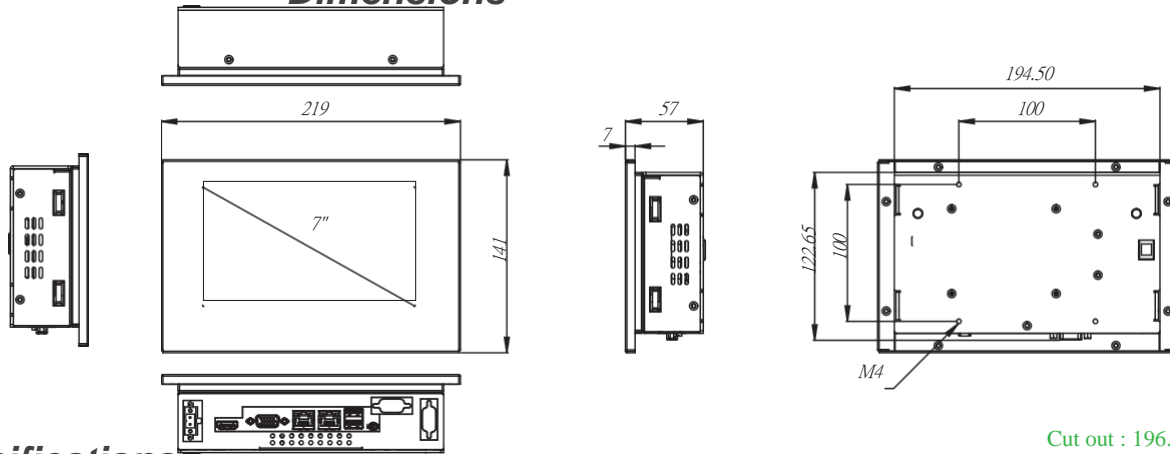

Specifications

Cut out : 196.5mm*124.7mm
Thickness limit : 5mm

Model		GSR-72PW
Processor System	CPU	Intel® Celeron® J1900 Processor
	Frequency	Quad-Core up to 2.0 GHz
	L2 Cache	Intel® Smart Cache 2 MB
	System Chipset	N/A
	BIOS	UEFI
Memory	Technology	DDR3L 1333 MHz SDRAM
	Max. Capacity	8 GB
	Socket	1 (204-pin SO-DIMM)
Display	Panel Size	7" LCD Panel
	Resolution	800 x 480
	Viewing Angle	60 x 80 (H) x 80 x 80 (V)
	Brightness	350 (cd/m ²)
	Color Support	16.7M
	Contrast Ratio	1000:1
	Response Time	25 (msec)
	HDMI	HDMI 1.4a up to 1920 x 1200
Touchscreen	Three Display	LCD Panel + VGA or LCD Panel + HDMI
	Touchscreen Type	Projected Capacitive
	Surface Hardness	7 Mohs
	Durability	-
I/O Interface	Transparency	90% (±3%)
	USB	2 USB 3.0
	Serial Port	2 COM (1 RS-232/422/485, 1 RS-232)
	Digital I/O	8-pin Digital I/O (DB-9 connector, Option)
Ethernet	Expansion	2 Mini PCIe (1 full-size Mini PCIe or mSATA, selected by jumper setting; 1 half-size Mini PCIe)
	Controller	Dual GbE, 10/100/1000 Mbps (Realtek RTL8111G-CG)
Audio	Chipset	Realtek ALC662 High Definition Audio (HD)
	Connector	Line out
Storage	mSATA	1 mSATA (shared with full-size Mini PCIe)
	SATA II	1 Internal 2.5" HDD/SSD
Power	Power Supply Voltage	Supports 9-36 V DC input
	Connector Type	2-Pin Terminal Block, Phoenix Connector
	Power Consumption (Typical)	1.53 A @ 12 V (18.4 W)
	Power Consumption (Max)	1.8 A @ 12 V (21.6 W)
Environment	Battery	Lithium 3 V / 210 mAH
	Operating Temperature	-20~60° C (-4~140° F) (Humidity: 50° C @ 80% RH Non-condensing) w/ 2.5" Extended Temp. SSD
	Storage Temperature	-40~85° C (-40~185° F) (Humidity: 85° C @ 80% RH Non-condensing)
	Humidity	5~95% @ 40° C, non-condensing
	Vibration	5-500 Hz, 0.026 G ² /Hz, 2.16 Grms, X, Y, Z, 1 hour per axis
General	Certification	TBD
	Ingress Protection	IP54
	Dimensions (L x W x H)	219 x 141 x 57 mm (8.62" x 5.55" x 2.24")
	Weight	1.37kg
Operating System	Windows 7/8.1/10, WES7-E/P, WE8S, Ubuntu 14.04	



GSR-72PW